



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp<sup>®</sup>\_rate2006 = 58.1

HP Integrity rx4640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp\_rate\_base2006 = 56.3

CPU2006 license: 03


Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

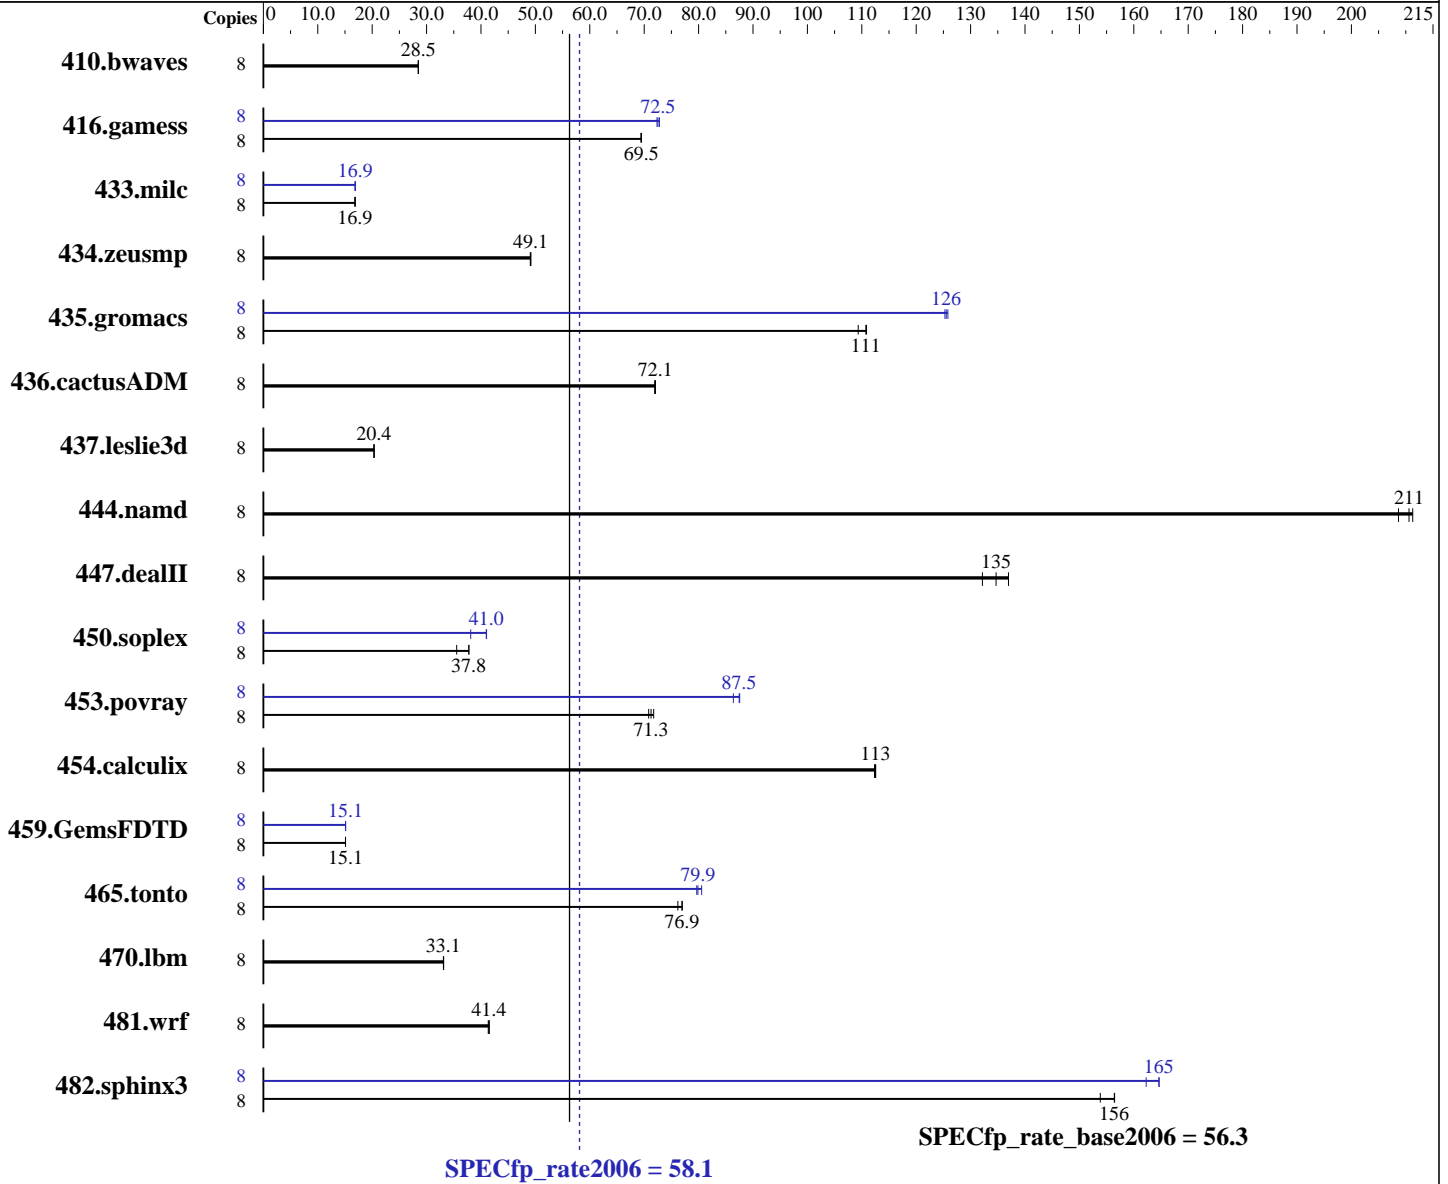

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9050  
 CPU Characteristics: 1.6GHz/24MB, 400MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1-4 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

### Software

Operating System: HPUX11i-TCOE B.11.23.0609  
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12  
 HP Fortran90 Compiler B.11.23.32  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 58.1

HP Integrity rx4640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp\_rate\_base2006 = 56.3

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

L3 Cache: 12 MB I+D on chip per core  
Other Cache: None  
Memory: 32 GB (16x2GB DIMMs)  
Disk Subsystem: 36GB 15K RPM SCSI  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3819	28.5	3813	28.5	<b>3817</b>	<b>28.5</b>	8	3819	28.5	3813	28.5	<b>3817</b>	<b>28.5</b>
416.gamess	8	<b>2255</b>	<b>69.5</b>	2254	69.5	2257	69.4	8	<b>2159</b>	<b>72.5</b>	2152	72.8	2165	72.4
433.milc	8	<b>4356</b>	<b>16.9</b>	4362	16.8	4354	16.9	8	4352	16.9	4348	16.9	<b>4350</b>	<b>16.9</b>
434.zeusmp	8	<b>1481</b>	<b>49.1</b>	1481	49.2	1484	49.1	8	<b>1481</b>	<b>49.1</b>	1481	49.2	1484	49.1
435.gromacs	8	522	109	<b>516</b>	<b>111</b>	515	111	8	456	125	<b>455</b>	<b>126</b>	454	126
436.cactusADM	8	<b>1327</b>	<b>72.1</b>	1329	71.9	1326	72.1	8	<b>1327</b>	<b>72.1</b>	1329	71.9	1326	72.1
437.leslie3d	8	3695	20.4	<b>3695</b>	<b>20.4</b>	3699	20.3	8	3695	20.4	<b>3695</b>	<b>20.4</b>	3699	20.3
444.namd	8	307	209	<b>305</b>	<b>211</b>	304	211	8	307	209	<b>305</b>	<b>211</b>	304	211
447.dealII	8	<b>680</b>	<b>135</b>	692	132	668	137	8	<b>680</b>	<b>135</b>	692	132	668	137
450.soplex	8	1878	35.5	1766	37.8	<b>1767</b>	<b>37.8</b>	8	1751	38.1	1626	41.0	<b>1629</b>	<b>41.0</b>
453.povray	8	<b>597</b>	<b>71.3</b>	601	70.8	593	71.7	8	493	86.4	486	87.6	<b>487</b>	<b>87.5</b>
454.calculix	8	588	112	<b>587</b>	<b>113</b>	586	113	8	588	112	<b>587</b>	<b>113</b>	586	113
459.GemsFDTD	8	5621	15.1	5625	15.1	<b>5622</b>	<b>15.1</b>	8	5619	15.1	5618	15.1	<b>5619</b>	<b>15.1</b>
465.tonto	8	1022	77.0	1033	76.2	<b>1023</b>	<b>76.9</b>	8	988	79.7	977	80.6	<b>986</b>	<b>79.9</b>
470.lbm	8	3317	33.1	<b>3320</b>	<b>33.1</b>	3321	33.1	8	3317	33.1	<b>3320</b>	<b>33.1</b>	3321	33.1
481.wrf	8	2162	41.3	2152	41.5	<b>2156</b>	<b>41.4</b>	8	2162	41.3	2152	41.5	<b>2156</b>	<b>41.4</b>
482.sphinx3	8	1014	154	<b>997</b>	<b>156</b>	996	156	8	961	162	947	165	<b>947</b>	<b>165</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 58.1**

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECfp\_rate\_base2006 = 56.3**

**CPU2006 license:** 03

**Test date:** Sep-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Operating System Notes (Continued)

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```
dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

## Base Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90
```

## Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
454.calculix: -DSPEC_CPU_NOZMODIFIER
481.wrf: -DNOUNDERSCORE +noppu
```

## Base Optimization Flags

C benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

Fortran benchmarks:

```
+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N
```

Benchmarks using both Fortran and C:

```
+Ofaster(-hp_cc) +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Ofaster(-hp_f90) -Wl,-N
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 58.1**

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECfp\_rate\_base2006 = 56.3**

**CPU2006 license:** 03

**Test date:** Sep-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Peak Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -Ae`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

Fortran benchmarks:

`/opt/fortran90/bin/f90`

Benchmarks using both Fortran and C:

`/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90`

## Peak Portability Flags

453.povray: `-DSPEC_CPU_NEED_INVHYP`

454.calculix: `-DSPEC_CPU_NOZMODIFIER`

481.wrf: `-DNOUNDERSCORE +noppu`

## Peak Optimization Flags

C benchmarks:

433.milc: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

470.lbm: `basepeak = yes`

482.sphinx3: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `basepeak = yes`

450.soplex: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

453.povray: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M  
-Wl,+pi,64M`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 58.1**

HP Integrity rx4640 (1.6GHz/24MB Dual-Core  
Intel Itanium 2)

**SPECfp\_rate\_base2006 = 56.3**

**CPU2006 license:** 03

**Test date:** Sep-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl, -a, archive\_shared -Wl, +pd, 64M -Wl, +pi, 64M  
+Odataprefetch=direct -Wl, -N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl, -a, archive\_shared -Wl, +pd, 64M -Wl, +pi, 64M  
+Odataprefetch=direct -Wl, -N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl, -a, archive\_shared -Wl, +pd, 64M -Wl, +pi, 64M  
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster(-hp\_cc) +Otype\_safety=ansi -Wl, -a, archive\_shared  
-Wl, +pd, 64M -Wl, +pi, 64M +Onoparmsoverlap +Ofaster(-hp\_f90)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.06.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:06:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 October 2006.