



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

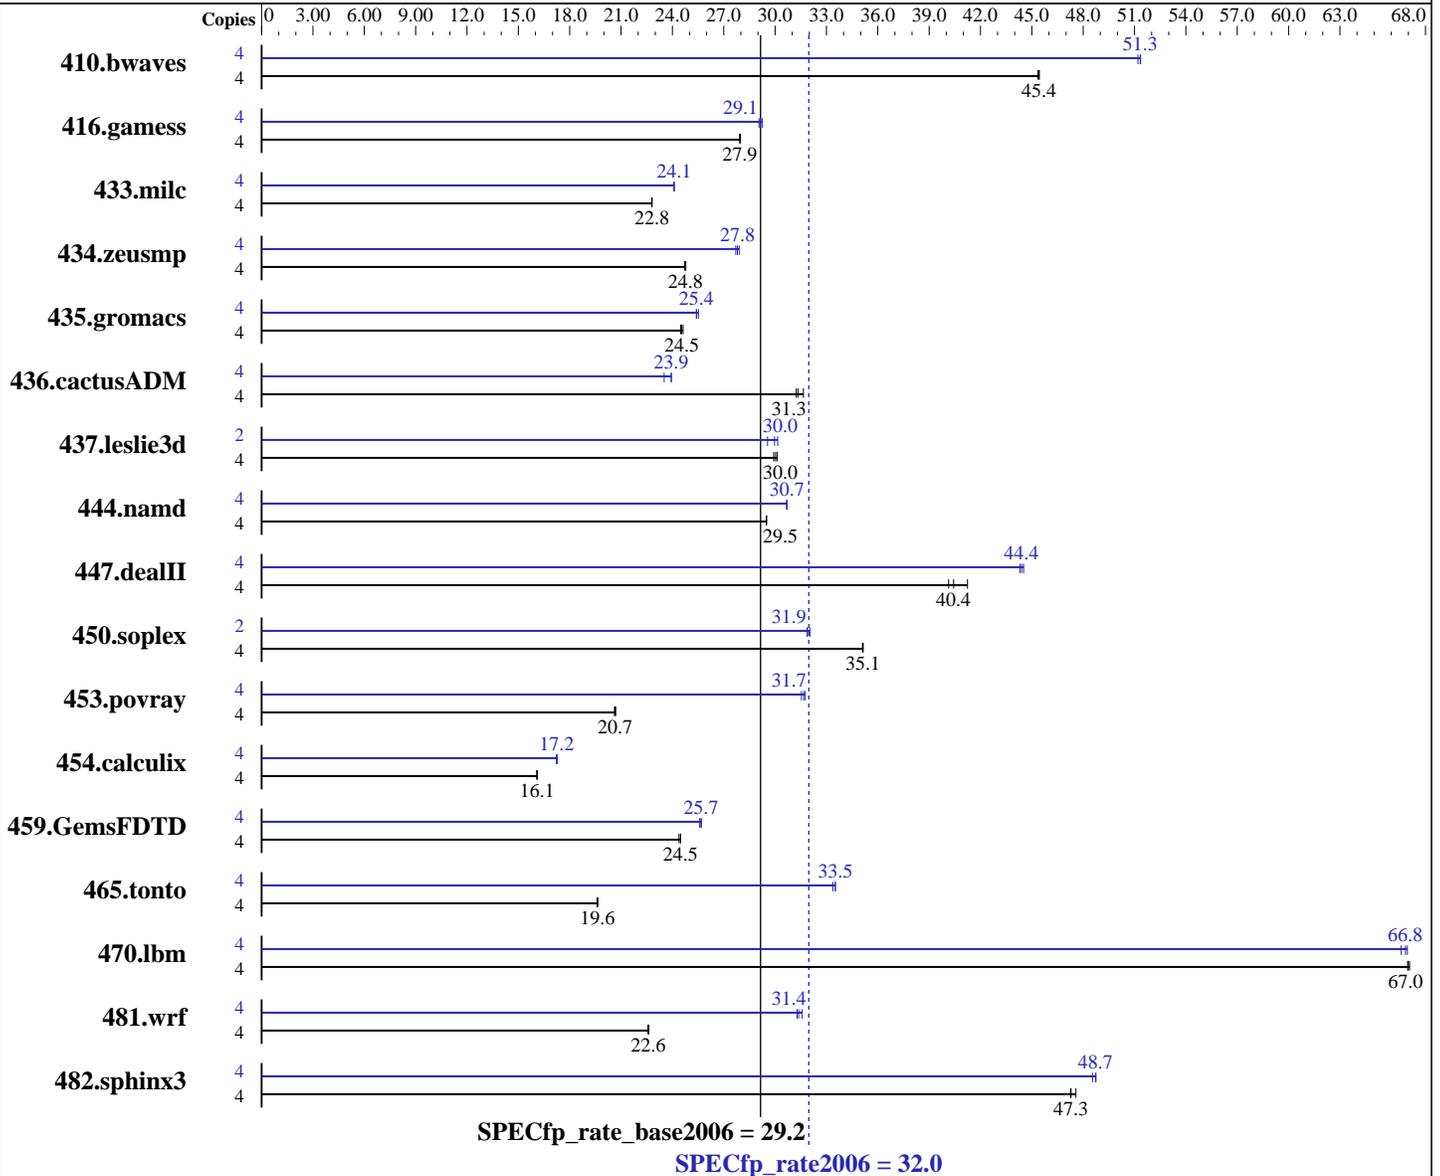

Hardware

CPU Name: POWER5+
 CPU Characteristics: 2100
 CPU MHz: Integrated
 FPU: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 1 chip
 CPU(s) orderable: 64 KB I + 32 KB D on chip per core
 Primary Cache: 1920 KB I+D on chip per chip
 Secondary Cache:

Continued on next page

Software

Operating System: AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 8.0 for AIX with the December 2006 PTF
 XL Fortran Enterprise Edition Version 10.1 for AIX with the November 2006 PTF
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

L3 Cache: 36 MB I+D off chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB)
Disk Subsystem: 1x73 GB SCSI, 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: ESSL 4.2.0.4

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<u>1197</u>	<u>45.4</u>	1199	45.4	1196	45.4	4	<u>1059</u>	<u>51.3</u>	1058	51.4	1062	51.2
416.gamess	4	<u>2803</u>	<u>27.9</u>	2804	27.9	2800	28.0	4	2695	29.1	2677	29.3	<u>2687</u>	<u>29.1</u>
433.milc	4	1610	22.8	1610	22.8	<u>1610</u>	<u>22.8</u>	4	1523	24.1	<u>1524</u>	<u>24.1</u>	1524	24.1
434.zeusmp	4	<u>1470</u>	<u>24.8</u>	1469	24.8	1473	24.7	4	<u>1309</u>	<u>27.8</u>	1314	27.7	1305	27.9
435.gromacs	4	<u>1164</u>	<u>24.5</u>	1160	24.6	1167	24.5	4	1119	25.5	1124	25.4	<u>1124</u>	<u>25.4</u>
436.cactusADM	4	1530	31.2	1510	31.7	<u>1526</u>	<u>31.3</u>	4	1997	23.9	2033	23.5	<u>1997</u>	<u>23.9</u>
437.leslie3d	4	1257	29.9	<u>1252</u>	<u>30.0</u>	1248	30.1	2	<u>627</u>	<u>30.0</u>	636	29.6	624	30.1
444.namd	4	1088	29.5	<u>1088</u>	<u>29.5</u>	1088	29.5	4	1046	30.7	1045	30.7	<u>1045</u>	<u>30.7</u>
447.dealII	4	1110	41.2	<u>1132</u>	<u>40.4</u>	1140	40.1	4	1028	44.5	1033	44.3	<u>1031</u>	<u>44.4</u>
450.soplex	4	950	35.1	<u>950</u>	<u>35.1</u>	949	35.1	2	521	32.0	523	31.9	<u>523</u>	<u>31.9</u>
453.povray	4	1029	20.7	<u>1030</u>	<u>20.7</u>	1032	20.6	4	675	31.5	<u>672</u>	<u>31.7</u>	670	31.8
454.calculix	4	<u>2050</u>	<u>16.1</u>	2052	16.1	2050	16.1	4	1915	17.2	1910	17.3	<u>1914</u>	<u>17.2</u>
459.GemsFDTD	4	1734	24.5	<u>1734</u>	<u>24.5</u>	1740	24.4	4	1652	25.7	1659	25.6	<u>1653</u>	<u>25.7</u>
465.tonto	4	2009	19.6	<u>2006</u>	<u>19.6</u>	2003	19.6	4	<u>1174</u>	<u>33.5</u>	1174	33.5	1179	33.4
470.lbm	4	819	67.1	<u>820</u>	<u>67.0</u>	821	67.0	4	821	66.9	825	66.6	<u>822</u>	<u>66.8</u>
481.wrf	4	1979	22.6	<u>1977</u>	<u>22.6</u>	1975	22.6	4	<u>1424</u>	<u>31.4</u>	1415	31.6	1428	31.3
482.sphinx3	4	<u>1649</u>	<u>47.3</u>	1650	47.3	1639	47.6	4	<u>1600</u>	<u>48.7</u>	1599	48.7	1606	48.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

ulimits set to unlimited

bindprocessor command used on submit to bind each copy to a unique processor.

Large page mode was set as follows:
vmo -r -o lgpg_regions=900 -o lgpg_size=16777216
SMT was enabled using the AIX commands
smtctl -m on -w boot
bosboot -aD
shutdown -rF



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

C++ benchmarks:

-O5 -qlargepage -D_ILS_MACROS -qrtti=all -qipa=noobject -blpdata
-qipa=threads

Fortran benchmarks:

-O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject -blpdata
-qipa=threads

Benchmarks using both Fortran and C:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qipa=noobject -blpdata -qipa=threads



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2007
Hardware Availability: Feb-2006
Software Availability: Dec-2006

Base Other Flags

C benchmarks:

`-bmaxdata:0x40000000 -qsuppress=1500-036`

C++ benchmarks:

`-bmaxdata:0x50000000 -qsuppress=1500-036`

Fortran benchmarks:

`-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036`

Benchmarks using both Fortran and C:

`-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036`

Peak Compiler Invocation

C benchmarks:

`/usr/vac/bin/xlc`

C++ benchmarks:

`/usr/vacpp/bin/xlc`

Fortran benchmarks:

`/usr/bin/xlf95`

Benchmarks using both Fortran and C:

`/usr/vac/bin/xlc /usr/bin/xlf95`

Peak Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

433.milc: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qalign=natural -qipa=noobject
-blpdata -qipa=threads

470.lbm: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

482.sphinx3: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -qipa=noobject -blpdata -qipa=threads

447.dealII: -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -qipa=noobject -blpdata -qipa=threads

450.soplex: -O4 -qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -q64 -qalign=natural -lmass -qipa=noobject
-blpdata -qipa=threads

Fortran benchmarks:

410.bwaves: -O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject
-blpdata -qipa=threads

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qessl
-lessl -qipa=noobject -blpdata -qipa=threads

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-qipa=noobject -blpdata -qipa=threads

437.leslie3d: -O5 -qlargepage -qipa=noobject -blpdata -qipa=threads

459.GemsFDTD: Same as 437.leslie3d

465.tonto: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -lmass
-qipa=noobject -blpdata -qipa=threads

Benchmarks using both Fortran and C:

435.gromacs: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

436.cactusADM: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

454.calculix: Same as 435.gromacs

481.wrf: -qlanglvl=extc99 -O5 -qlargepage -lmass
-qsmallstack=dynlenonheap -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

Peak Other Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -qsuppress=1500-036

470.lbm: -bmaxdata:0x30000000 -qsuppress=1500-036

482.sphinx3: -qfdpr -qsuppress=1500-036

C++ benchmarks:

444.namd: -qfdpr -qsuppress=1500-036

447.dealII: -bmaxdata:0x50000000 -qsuppress=1500-036

450.soplex: -bmaxdata:0x40000000 -qfdpr -qsuppress=1500-036

453.povray: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

416.gamess: -bmaxdata:0x40000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

434.zeusmp: -bmaxdata:0x40000000 -qfdpr -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

437.leslie3d: -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

465.tonto: -bmaxdata:0x20000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

436.cactusADM: -bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 32.0

Bull Escala PL250R+ (2100 MHz, 2 CPU)

SPECfp_rate_base2006 = 29.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2007
Hardware Availability: Feb-2006
Software Availability: Dec-2006

Peak Other Flags (Continued)

481.wrf: -bmaxdata:0x30000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.19.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.19.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:49:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 March 2007.