



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

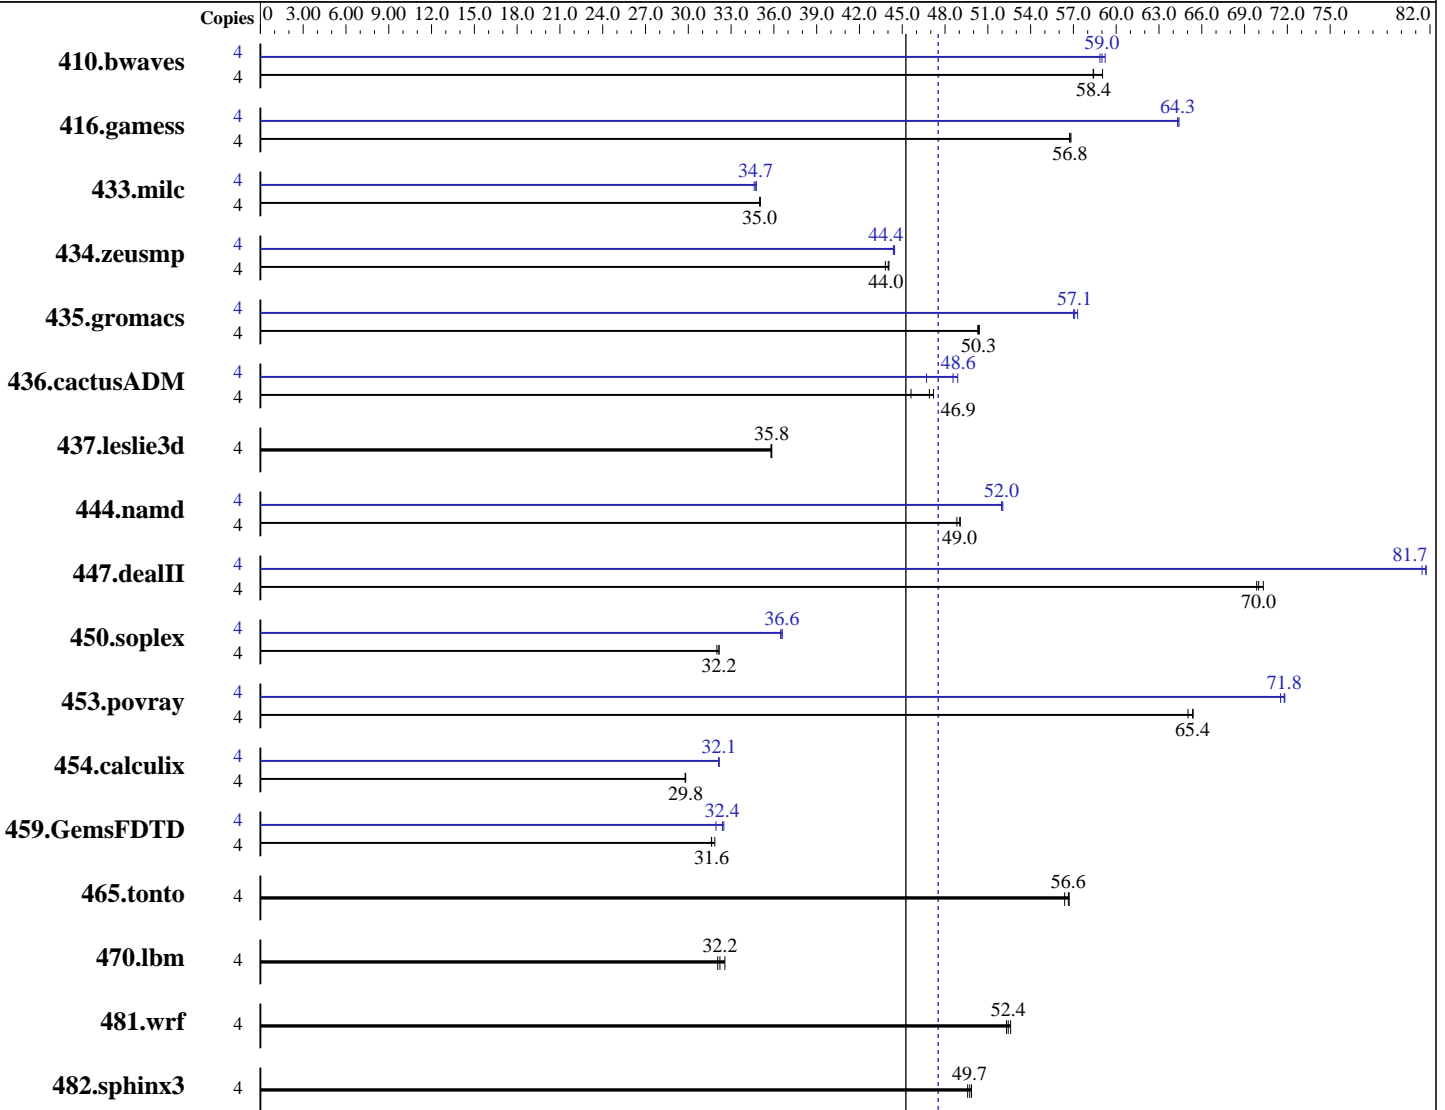

SPECfp_rate_base2006 = 45.3

SPECfp_rate2006 = 47.5

Hardware

CPU Name: AMD Opteron 8220
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64)
 2.6.16.21-0.8-smp
 Compiler: QLogic PathScale
 Compiler Suite, Release 3.0
 Auto Parallel: No
 File System: ext2
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB, PC2-5300P CL5)
Disk Subsystem: 1 x 72 GB 10 K SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	921	59.0	<u>931</u>	<u>58.4</u>	931	58.4	4	924	58.9	918	59.2	<u>921</u>	<u>59.0</u>
416.gamess	4	1378	56.8	<u>1380</u>	<u>56.8</u>	1381	56.7	4	1218	64.3	<u>1218</u>	<u>64.3</u>	1216	64.4
433.milc	4	1049	35.0	1048	35.0	<u>1049</u>	<u>35.0</u>	4	1056	34.8	<u>1057</u>	<u>34.7</u>	1061	34.6
434.zeusmp	4	826	44.1	<u>827</u>	<u>44.0</u>	831	43.8	4	820	44.4	819	44.5	<u>819</u>	<u>44.4</u>
435.gromacs	4	567	50.4	568	50.3	<u>567</u>	<u>50.3</u>	4	498	57.3	<u>500</u>	<u>57.1</u>	501	57.0
436.cactusADM	4	<u>1019</u>	<u>46.9</u>	1013	47.2	1048	45.6	4	978	48.9	1023	46.7	<u>984</u>	<u>48.6</u>
437.leslie3d	4	<u>1049</u>	<u>35.8</u>	1050	35.8	1049	35.9	4	<u>1049</u>	<u>35.8</u>	1050	35.8	1049	35.9
444.namd	4	657	48.8	654	49.1	<u>654</u>	<u>49.0</u>	4	<u>617</u>	<u>52.0</u>	616	52.1	617	52.0
447.dealII	4	651	70.3	<u>654</u>	<u>70.0</u>	655	69.9	4	560	81.7	<u>560</u>	<u>81.7</u>	562	81.4
450.soplex	4	<u>1038</u>	<u>32.2</u>	1038	32.2	1042	32.0	4	915	36.5	912	36.6	<u>912</u>	<u>36.6</u>
453.povray	4	327	65.0	325	65.4	<u>326</u>	<u>65.4</u>	4	296	71.8	<u>296</u>	<u>71.8</u>	298	71.5
454.calculix	4	1108	29.8	<u>1107</u>	<u>29.8</u>	1107	29.8	4	1027	32.1	1026	32.2	<u>1026</u>	<u>32.1</u>
459.GemsFDTD	4	1342	31.6	<u>1341</u>	<u>31.6</u>	1332	31.9	4	1306	32.5	1329	31.9	<u>1310</u>	<u>32.4</u>
465.tonto	4	<u>695</u>	<u>56.6</u>	698	56.4	694	56.7	4	<u>695</u>	<u>56.6</u>	698	56.4	694	56.7
470.lbm	4	1688	32.6	<u>1706</u>	<u>32.2</u>	1714	32.1	4	1688	32.6	<u>1706</u>	<u>32.2</u>	1714	32.1
481.wrf	4	<u>852</u>	<u>52.4</u>	849	52.6	854	52.3	4	<u>852</u>	<u>52.4</u>	849	52.6	854	52.3
482.sphinx3	4	1564	49.9	<u>1568</u>	<u>49.7</u>	1572	49.6	4	1564	49.9	<u>1568</u>	<u>49.7</u>	1572	49.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Node interleaving is disabled
taskset utility used to bind CPU(s) to processes
ulimit -s unlimited set

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Peak Compiler Invocation

C benchmarks:
pathcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

Peak Compiler Invocation (Continued)

C++ benchmarks:
pathCC

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_TABLE_WORKAROUND
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-exceptions

447.dealII: -Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint
-m32 -fno-exceptions

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

Peak Optimization Flags (Continued)

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2
-OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off
-LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10
-LNO:full_unroll=5 -ipa

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem_opnds=on

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.xml



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 47.5

ProLiant BL685c (AMD Opteron 8220)

SPECfp_rate_base2006 = 45.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:20:49 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.