



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 14.5**

IBM System x3755 (AMD Opteron 8224 SE)

**SPECfp\_base2006 = 14.2**

CPU2006 license: 11


Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

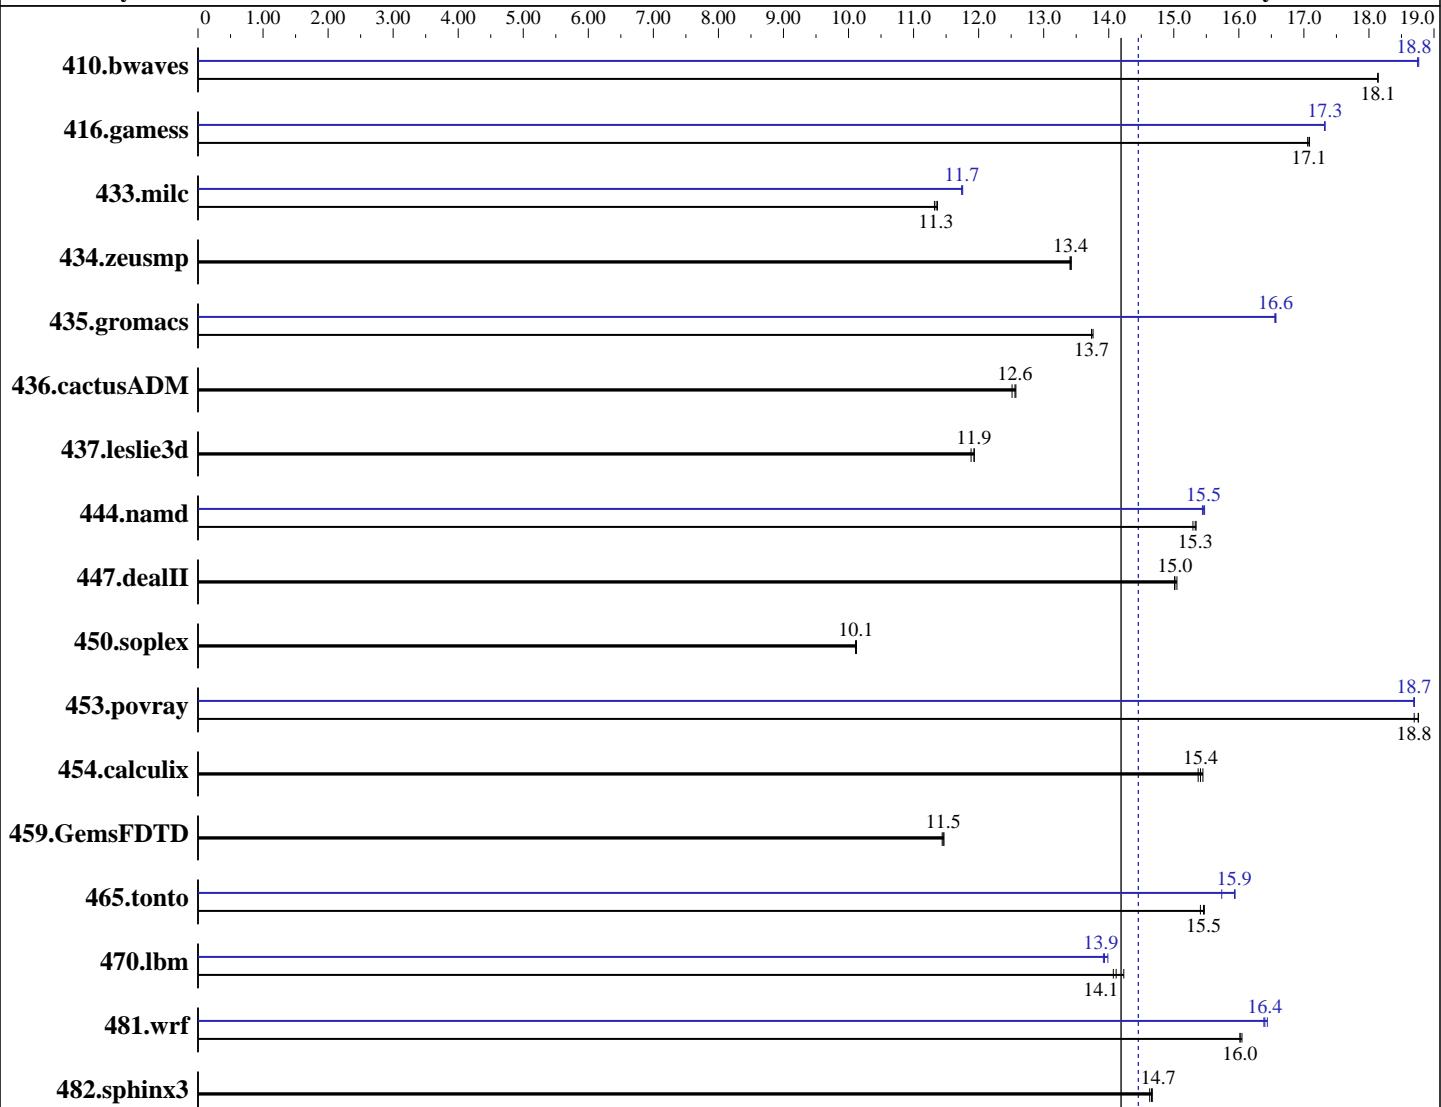

**SPECfp\_base2006 = 14.2**

**SPECfp2006 = 14.5**

## Hardware

CPU Name: AMD Opteron 8224 SE  
 CPU Characteristics:  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1, 2, 3, 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 10 SP1 64-bit kernel  
 Compiler: The Portland Group (PGI)  
 PGI pgf90 7.1-0 Fortran Compiler  
 PGI pgcc 7.1-0 C Compiler  
 PGI pgCC 7.1-0 C++ Compiler  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user, run level 3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### IBM System x3755 (AMD Opteron 8224 SE)

**SPECfp2006 = 14.5**

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (16 x 2GB DDR2-667 CL5 ECC REG Dual Rank)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>749</b>	<b>18.1</b>	749	18.1	749	18.1	<b>725</b>	<b>18.8</b>	724	18.8	725	18.7
416.gamess	<b>1147</b>	<b>17.1</b>	1148	17.1	1146	17.1	<b>1130</b>	<b>17.3</b>	1130	17.3	1130	17.3
433.milc	811	11.3	808	11.4	<b>809</b>	<b>11.3</b>	<b>782</b>	<b>11.7</b>	782	11.7	781	11.8
434.zeusmp	678	13.4	<b>678</b>	<b>13.4</b>	679	13.4	<b>678</b>	<b>13.4</b>	<b>678</b>	<b>13.4</b>	679	13.4
435.gromacs	<b>520</b>	<b>13.7</b>	519	13.8	520	13.7	431	16.6	<b>431</b>	<b>16.6</b>	431	16.6
436.cactusADM	<b>952</b>	<b>12.6</b>	955	12.5	950	12.6	<b>952</b>	<b>12.6</b>	955	12.5	950	12.6
437.leslie3d	<b>788</b>	<b>11.9</b>	788	11.9	791	11.9	<b>788</b>	<b>11.9</b>	788	11.9	791	11.9
444.namd	523	15.3	<b>523</b>	<b>15.3</b>	524	15.3	<b>519</b>	<b>15.5</b>	519	15.4	518	15.5
447.dealII	760	15.0	<b>762</b>	<b>15.0</b>	762	15.0	<b>760</b>	<b>15.0</b>	<b>762</b>	<b>15.0</b>	762	15.0
450.soplex	824	10.1	<b>824</b>	<b>10.1</b>	825	10.1	<b>824</b>	<b>10.1</b>	<b>824</b>	<b>10.1</b>	825	10.1
453.povray	<b>284</b>	<b>18.8</b>	285	18.7	284	18.8	<b>285</b>	<b>18.7</b>	285	18.7	285	18.7
454.calculix	534	15.4	<b>535</b>	<b>15.4</b>	537	15.4	534	15.4	<b>535</b>	<b>15.4</b>	537	15.4
459.GemsFDTD	925	11.5	<b>926</b>	<b>11.5</b>	927	11.4	<b>925</b>	<b>11.5</b>	<b>926</b>	<b>11.5</b>	927	11.4
465.tonto	636	15.5	<b>637</b>	<b>15.5</b>	639	15.4	<b>625</b>	<b>15.7</b>	<b>618</b>	<b>15.9</b>	617	15.9
470.lbm	965	14.2	<b>974</b>	<b>14.1</b>	976	14.1	<b>982</b>	<b>14.0</b>	<b>986</b>	<b>13.9</b>	987	13.9
481.wrf	697	16.0	<b>697</b>	<b>16.0</b>	696	16.0	<b>681</b>	<b>16.4</b>	682	16.4	680	16.4
482.sphinx3	1332	14.6	<b>1330</b>	<b>14.7</b>	1329	14.7	<b>1332</b>	<b>14.6</b>	<b>1330</b>	<b>14.7</b>	1329	14.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
 'numactl' was used to bind copies to the cores  
 Set vm.nr\_hugepages=128 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages

## Base Compiler Invocation

C benchmarks:  
 pgcc

C++ benchmarks:  
 pgcpp

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	<b>SPECfp2006 =</b>	<b>14.5</b>
IBM System x3755 (AMD Opteron 8224 SE)	<b>SPECfp_base2006 =</b>	<b>14.2</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Aug-2007
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Sep-2007
<b>Tested by:</b> Advanced Micro Devices	<b>Software Availability:</b>	Oct-2007

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
pgf95

Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
    437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8  
-typ k8-64 -Bstatic_pgi`

C++ benchmarks:  
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8  
--zc_eh -typ k8-64 -Bstatic_pgi`

Fortran benchmarks:  
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8  
-typ k8-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:  
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8  
-typ k8-64 -Bstatic_pgi`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 14.5**

IBM System x3755 (AMD Opteron 8224 SE)

**SPECfp\_base2006 = 14.2**

CPU2006 license: 11

**Test date:** Aug-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Sep-2007

Tested by: Advanced Micro Devices

**Software Availability:** Oct-2007

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
           -Mipa=noarg(pass 2) -Mpfo(pass 2) -fast -O4 -Mdse
           -Mfprelaxed -Msmartralloc=huge:8 -tp k8-64 -Bstatic_pgi
```

```
470.lbm: -fast -Mfprelaxed -Msmartralloc=huge:8 -Mipa=fast
           -Mipa=noarg -tp k8-64 -Bstatic_pgi
```

```
482.sphinx3: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3755 (AMD Opteron 8224 SE)

**SPECfp2006 =**

**14.5**

**SPECfp\_base2006 =**

**14.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** Advanced Micro Devices

**Test date:**

Aug-2007

**Hardware Availability:** Sep-2007

**Software Availability:** Oct-2007

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fast -O4 -Mfprelaxed
           -Msmaralloc=huge:32 --zc_eh -tp k8-64 -Bstatic_pgi
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -fast -Mfprelaxed -Msmaralloc=huge:32 -Mipa=fast
            -Mipa=inline --zc_eh -tp k8-64 -Bstatic_pgi
```

Fortran benchmarks:

```
410.bwaves: -fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmaralloc
            -tp k8-64 -Bstatic_pgi
```

```
416.gamess: -fast -Mipa=fast -Mipa=inline -Mfprelaxed -Mvect=noaltcode
            -Msmaralloc=huge:64 -tp k8-64 -Bstatic_pgi
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -fast -Mfprelaxed -Msmaralloc=huge:128 -Mipa=fast
            -Mipa=inline -Mvect=noaltcode -tp k8-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
435.gromacs: -fast -O4 -Mipa=fast -Mipa=inline -Mfprelaxed
              -Msmaralloc=huge:16 -tp k8-64 -Mfpapprox=rsqrt
              -Bstatic_pgi
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -fast -Mfprelaxed -Msmaralloc=huge:32 -Mvect=noaltcode
          -tp k8-64 -Bstatic_pgi
```

## Peak Other Flags

C benchmarks:

-w

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 14.5**

IBM System x3755 (AMD Opteron 8224 SE)

**SPECfp\_base2006 = 14.2**

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

## Peak Other Flags (Continued)

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi710\\_flags.20090714.01.html](http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/pgi710\\_flags.20090714.01.xml](http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 13:11:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 September 2007.