



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 81.6**

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate\_base2006 = 80.2**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2007

Hardware Availability: Dec-2006

Software Availability: Oct-2007

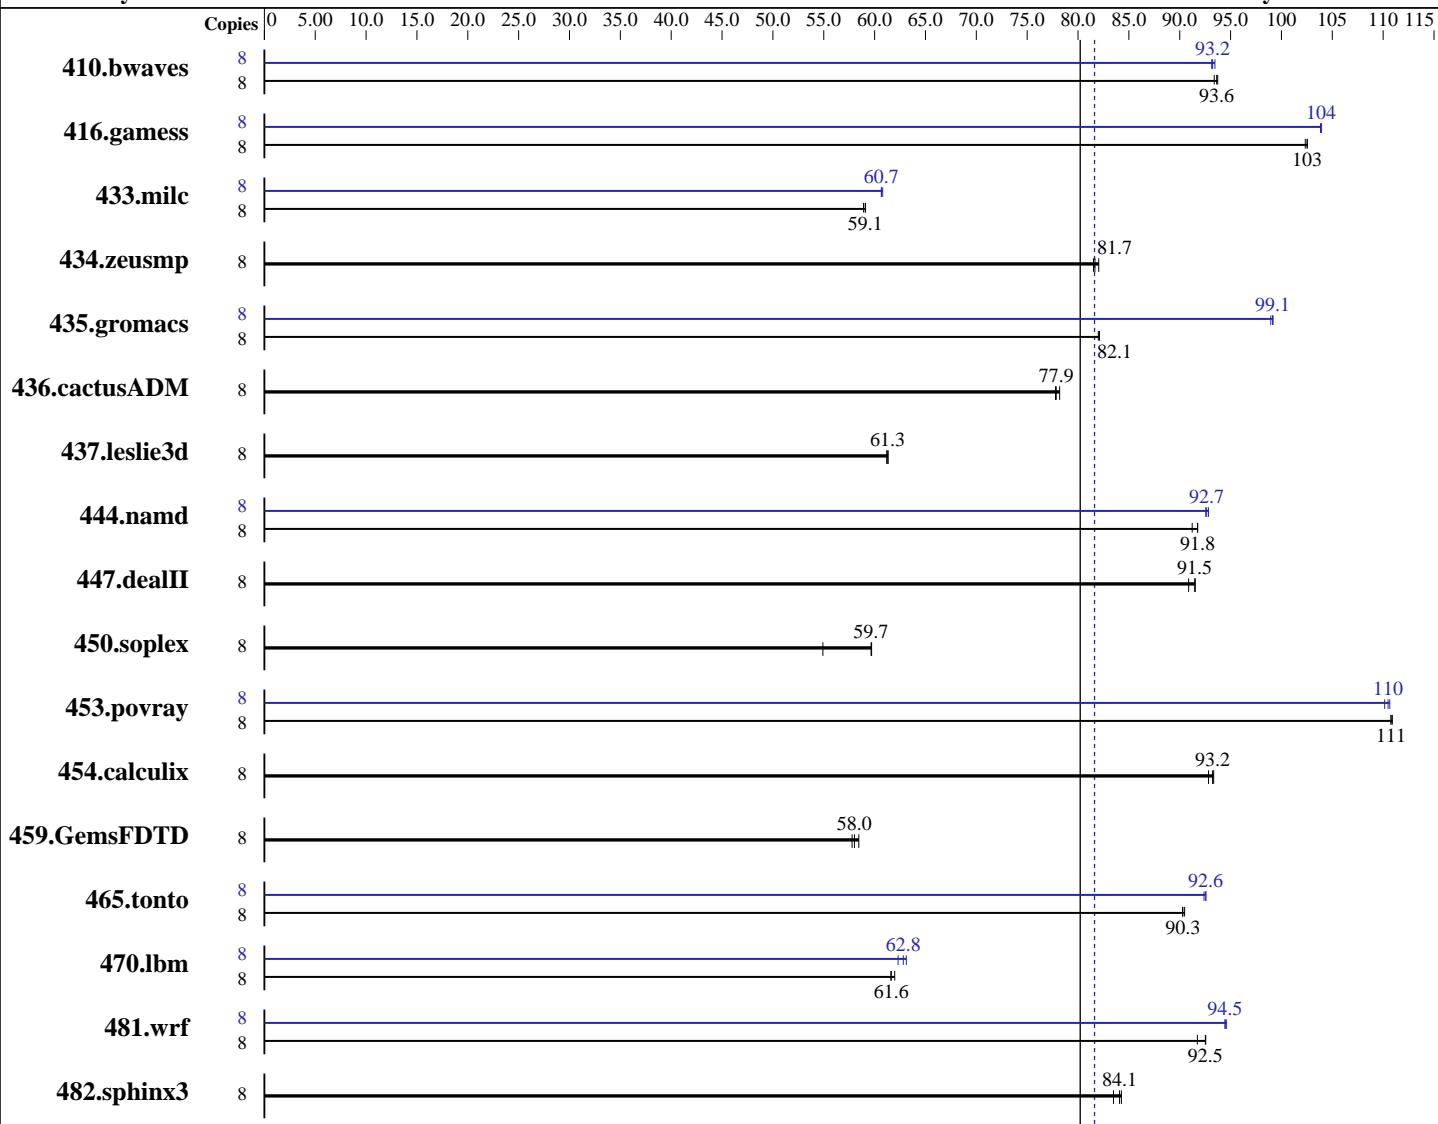

**SPECfp\_rate\_base2006 = 80.2**

**SPECfp\_rate2006 = 81.6**

## Hardware

CPU Name: AMD Opteron 8216  
 CPU Characteristics:  
 CPU MHz:  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1  
 Compiler: The Portland Group (PGI)  
 PGI pgf90 7.1-0 Fortran Compiler  
 PGI pgcc 7.1-0 C Compiler  
 PGI pgCC 7.1-0 C++ Compiler  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 81.6**

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate\_base2006 = 80.2**

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Oct-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (16x2GB, DDR2-667 CL5 ECC Dual Rank)  
 Disk Subsystem: 1 x 250 GB SATA 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>1161</b>	<b>93.6</b>	1164	93.4	1160	93.7	8	<b>1166</b>	<b>93.2</b>	1167	93.1	1163	93.5
416.gamess	8	<b>1528</b>	<b>103</b>	1531	102	1528	103	8	<b>1508</b>	<b>104</b>	1507	104	1508	104
433.milc	8	1242	59.1	1247	58.9	<b>1243</b>	<b>59.1</b>	8	1211	60.7	<b>1210</b>	<b>60.7</b>	1208	60.8
434.zeusmp	8	<b>891</b>	<b>81.7</b>	887	82.0	893	81.5	8	<b>891</b>	<b>81.7</b>	887	82.0	893	81.5
435.gromacs	8	697	82.0	696	82.1	<b>696</b>	<b>82.1</b>	8	577	99.0	<b>576</b>	<b>99.1</b>	576	99.2
436.cactusADM	8	1223	78.2	<b>1228</b>	<b>77.9</b>	1229	77.8	8	1223	78.2	<b>1228</b>	<b>77.9</b>	1229	77.8
437.leslie3d	8	<b>1227</b>	<b>61.3</b>	1226	61.3	1229	61.2	8	<b>1227</b>	<b>61.3</b>	1226	61.3	1229	61.2
444.namd	8	703	91.2	<b>699</b>	<b>91.8</b>	699	91.8	8	693	92.6	691	92.8	<b>692</b>	<b>92.7</b>
447.dealII	8	1007	90.9	<b>1001</b>	<b>91.5</b>	1000	91.5	8	1007	90.9	<b>1001</b>	<b>91.5</b>	1000	91.5
450.soplex	8	1215	54.9	1118	59.7	<b>1118</b>	<b>59.7</b>	8	1215	54.9	1118	59.7	<b>1118</b>	<b>59.7</b>
453.povray	8	<b>384</b>	<b>111</b>	384	111	384	111	8	385	111	<b>385</b>	<b>110</b>	386	110
454.calculix	8	711	92.8	<b>708</b>	<b>93.2</b>	707	93.3	8	711	92.8	<b>708</b>	<b>93.2</b>	707	93.3
459.GemsFDTD	8	<b>1463</b>	<b>58.0</b>	1452	58.4	1469	57.8	8	<b>1463</b>	<b>58.0</b>	1452	58.4	1469	57.8
465.tonto	8	<b>872</b>	<b>90.3</b>	870	90.5	872	90.3	8	<b>851</b>	<b>92.6</b>	850	92.6	852	92.4
470.lbm	8	<b>1783</b>	<b>61.6</b>	1785	61.6	1774	62.0	8	1742	63.1	1764	62.3	<b>1750</b>	<b>62.8</b>
481.wrf	8	974	91.7	965	92.6	<b>966</b>	<b>92.5</b>	8	<b>946</b>	<b>94.5</b>	946	94.5	945	94.6
482.sphinx3	8	1868	83.5	<b>1854</b>	<b>84.1</b>	1850	84.3	8	1868	83.5	<b>1854</b>	<b>84.1</b>	1850	84.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2457600' was used to set environment locked pages in memory quantity  
 'numactl' was used to bind one copy per core, and memory to a local NUMA node  
 Set vm/nr\_hugepages=1200 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages  
 Environment variable PGI\_HUGE\_PAGES set to 150

## Base Compiler Invocation

C benchmarks:  
 pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 81.6**

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate\_base2006 = 80.2**

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Oct-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8
-tpl k8-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8
--zc_eh -tpl k8-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8
-tpl k8-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:8
-tpl k8-64 -Bstatic_pgi
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate2006 = 81.6**

CPU2006 license: 55

**Test date:** Oct-2007

Test sponsor: Dell Inc.

**Hardware Availability:** Dec-2006

Tested by: Dell Inc.

**Software Availability:** Oct-2007

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
           -Mipa=noarg(pass 2) -Mpfo(pass 2) -fast -O4 -Mdse
           -Mfprelaxed -Msmartralloc=huge:8 -tp k8-64 -Bstatic_pgi
```

```
470.lbm: -fast -Mfprelaxed -Msmartralloc=huge:8 -Mipa=fast
           -Mipa=noarg -tp k8-64 -Bstatic_pgi
```

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate2006 = 81.6**

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Oct-2007

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fast -O4 -Mfprelaxed
           -Msmaralloc=huge:32 --zc_eh -tp k8-64 -Bstatic_pgi

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -fast -Mfprelaxed -Msmaralloc=huge:32 -Mipa=fast
            -Mipa=inline --zc_eh -tp k8-64 -Bstatic_pgi
```

Fortran benchmarks:

```
410.bwaves: -fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmaralloc
            -tp k8-64 -Bstatic_pgi

416.gamess: -fast -Mipa=fast -Mipa=inline -Mfprelaxed -Mvect=noaltcode
            -Msmaralloc=huge:64 -tp k8-64 -Bstatic_pgi

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -fast -Mfprelaxed -Msmaralloc=huge:128 -Mipa=fast
            -Mipa=inline -Mvect=noaltcode -tp k8-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
435.gromacs: -fast -O4 -Mipa=fast -Mipa=inline -Mfprelaxed
              -Msmaralloc=huge:16 -tp k8-64 -Mfpapprox=rsqrt
              -Bstatic_pgi

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -fast -Mfprelaxed -Msmaralloc=huge:32 -Mvect=noaltcode
          -tp k8-64 -Bstatic_pgi
```

## Peak Other Flags

C benchmarks:

-w

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 6950 (AMD Opteron 8216, 2.40 GHz)

**SPECfp\_rate2006 = 81.6**

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Oct-2007

## Peak Other Flags (Continued)

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi710\\_flags.html](http://www.spec.org/cpu2006/flags/pgi710_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/pgi710\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi710_flags.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:12:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 October 2007.