



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint®2006 = 22.9**

**IBM BladeCenter HS21 (Intel Xeon E5420)**

**SPECint\_base2006 = 19.9**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Dec-2007

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

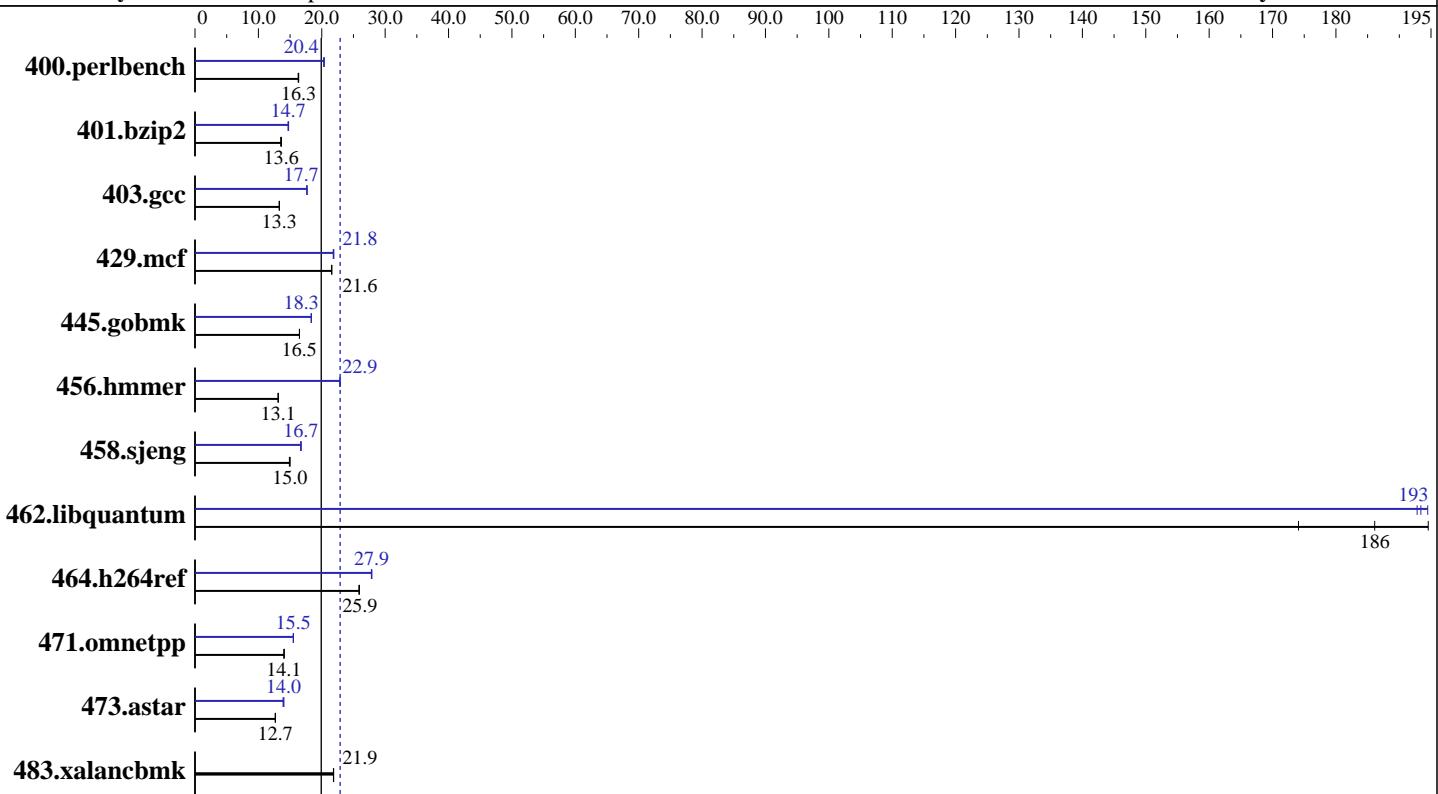

## Hardware

CPU Name: Intel Xeon E5420  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2493  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64), Kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap 8.1  
 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 22.9**

**IBM BladeCenter HS21 (Intel Xeon E5420)**

**SPECint\_base2006 = 19.9**

**CPU2006 license:** 11

**Test date:** Dec-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	600	16.3	<b>598</b>	<b>16.3</b>	597	16.4	<b>480</b>	<b>20.4</b>	481	20.3	479	20.4
401.bzip2	714	13.5	<b>708</b>	<b>13.6</b>	707	13.6	<b>653</b>	<b>14.8</b>	<b>656</b>	<b>14.7</b>	657	14.7
403.gcc	606	13.3	605	13.3	<b>605</b>	<b>13.3</b>	<b>455</b>	<b>17.7</b>	456	17.6	455	17.7
429.mcf	424	21.5	423	21.6	<b>423</b>	<b>21.6</b>	<b>417</b>	<b>21.8</b>	418	21.8	416	21.9
445.gobmk	637	16.5	<b>637</b>	<b>16.5</b>	636	16.5	<b>572</b>	<b>18.3</b>	<b>572</b>	<b>18.3</b>	572	18.3
456.hammer	710	13.1	711	13.1	<b>711</b>	<b>13.1</b>	<b>408</b>	<b>22.9</b>	408	22.9	408	22.9
458.sjeng	813	14.9	<b>808</b>	<b>15.0</b>	808	15.0	<b>725</b>	<b>16.7</b>	723	16.7	<b>724</b>	<b>16.7</b>
462.libquantum	119	174	106	195	<b>111</b>	<b>186</b>	107	193	<b>107</b>	<b>193</b>	107	194
464.h264ref	<b>854</b>	<b>25.9</b>	855	25.9	853	25.9	795	27.8	<b>795</b>	<b>27.9</b>	793	27.9
471.omnetpp	445	14.0	445	14.1	<b>445</b>	<b>14.1</b>	402	15.5	403	15.5	<b>402</b>	<b>15.5</b>
473.astar	555	12.7	<b>553</b>	<b>12.7</b>	553	12.7	<b>501</b>	<b>14.0</b>	501	14.0	505	13.9
483.xalancbmk	315	21.9	<b>316</b>	<b>21.9</b>	316	21.8	<b>315</b>	<b>21.9</b>	<b>316</b>	<b>21.9</b>	316	21.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode

Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled

OMP\_NUM\_THREADS set to number of cores

KMP\_AFFINITY set to physical,0

KMP\_STACKSIZE set to null

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 22.9**

IBM BladeCenter HS21 (Intel Xeon E5420)

**SPECint\_base2006 = 19.9**

CPU2006 license: 11

**Test date:** Dec-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Jan-2008

Tested by: IBM Corporation

**Software Availability:** Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -vec-guard-write -parallel -par-runtime-control
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

```
456.hmmr: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:

```
icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 22.9**

**IBM BladeCenter HS21 (Intel Xeon E5420)**

**SPECint\_base2006 = 19.9**

**CPU2006 license:** 11

**Test date:** Dec-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 22.9**

IBM BladeCenter HS21 (Intel Xeon E5420)

**SPECint\_base2006 = 19.9**

**CPU2006 license:** 11

**Test date:** Dec-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.14.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.14.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:18:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2008.