



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]2006 = 18.2

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = 16.8

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

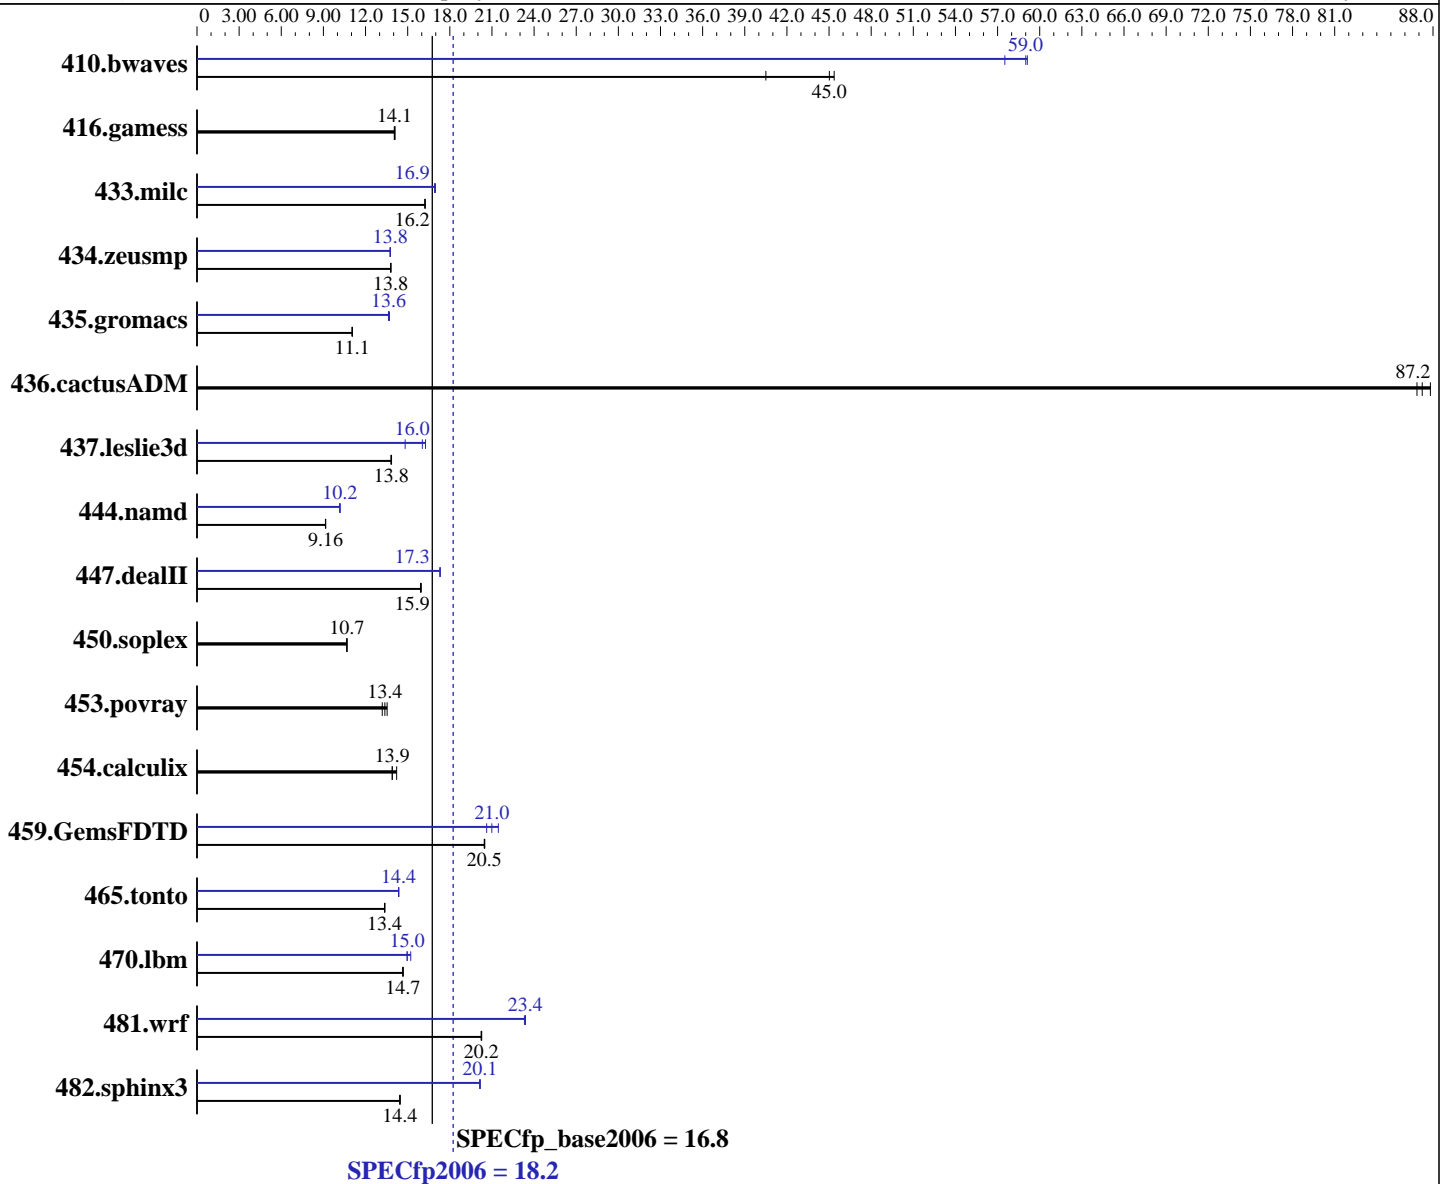

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: binutils-2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **18.2**

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = **16.8**

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-5300P CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	336	40.5	300	45.4	302	45.0	230	59.1	236	57.5	230	59.0
416.gamess	1392	14.1	1394	14.0	1389	14.1	1392	14.1	1394	14.0	1389	14.1
433.milc	565	16.2	566	16.2	565	16.2	542	16.9	542	16.9	541	17.0
434.zeusmp	659	13.8	660	13.8	659	13.8	661	13.8	662	13.7	662	13.8
435.gromacs	645	11.1	645	11.1	648	11.0	524	13.6	521	13.7	524	13.6
436.cactusADM	138	86.9	136	87.8	137	87.2	138	86.9	136	87.8	137	87.2
437.leslie3d	679	13.8	681	13.8	679	13.9	634	14.8	578	16.3	586	16.0
444.namd	877	9.15	876	9.16	876	9.16	789	10.2	787	10.2	789	10.2
447.dealII	719	15.9	716	16.0	719	15.9	661	17.3	661	17.3	661	17.3
450.soplex	782	10.7	781	10.7	782	10.7	782	10.7	781	10.7	782	10.7
453.povray	403	13.2	393	13.5	398	13.4	403	13.2	393	13.5	398	13.4
454.calculix	594	13.9	580	14.2	593	13.9	594	13.9	580	14.2	593	13.9
459.GemsFDTD	518	20.5	519	20.5	518	20.5	495	21.5	514	20.6	505	21.0
465.tonto	735	13.4	736	13.4	737	13.3	685	14.4	686	14.4	685	14.4
470.lbm	936	14.7	938	14.6	936	14.7	919	15.0	903	15.2	918	15.0
481.wrf	552	20.2	551	20.3	552	20.2	479	23.3	478	23.4	478	23.4
482.sphinx3	1349	14.4	1347	14.5	1350	14.4	966	20.2	968	20.1	968	20.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 18.2

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = 16.8

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:896 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 18.2

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = 16.8

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Mconcur -Msafepr
-Mfprelaxed -Mipa=jobs:8 -Mipa=inline -Mipa=arg
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64
-Bstatic_pgi

470.lbm: -fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mipa=fast
-Mipa=inline -Mipa=noarg -Mprefetch=distance:12
-Mprefetch=nta -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 18.2

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = 16.8

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

482.sphinx3: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mconcur=noaltcode(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:896
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

447.dealIII: -fast -Mfprelaxed -Msmartalloc=huge:896 --zc_eh -Mnovect
-alias=ansi -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

450.soplex: basepeak = yes

453.povray: basepeak = yes

Fortran benchmarks:

410.bwaves: -fastsse -Mloop32 -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -Mconcur -Mipa=jobs:8
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

416.gamess: basepeak = yes

434.zeusmp: -fast -Mloop32 -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-Mfprelaxed -Mconcur -Msmartalloc -tp barcelona-64
-Bstatic_pgi

437.leslie3d: -fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed
-Mconcur=noaltcode -Msmartalloc=huge:896 -tp barcelona-64
-Bstatic_pgi

459.GemsFDTD: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inlinenopfo(pass 2) -Mconcur(pass 2) -Mpfo(pass 2)
-fast -Mfprelaxed -Msmartalloc=huge:896 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

465.tonto: -fast -O4 -Mfprelaxed -Msmartalloc=huge:896
-Mprefetch=distance:8 -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-Mvect=noaltcode -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mconcur -Mfpprox=rsqrt -Mipa=jobs:8 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:896
-tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 18.2

ProLiant DL165 G5
(2.3 GHz AMD Opteron 2356)

SPECfp_base2006 = 16.8

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -fast -Mfprelaxed -Msmartalloc=huge:896 -Mconcur=noaltcode
-Mvect=noaltcode -Mprefetch=distance:8 -tp barcelona-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:23:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.