



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

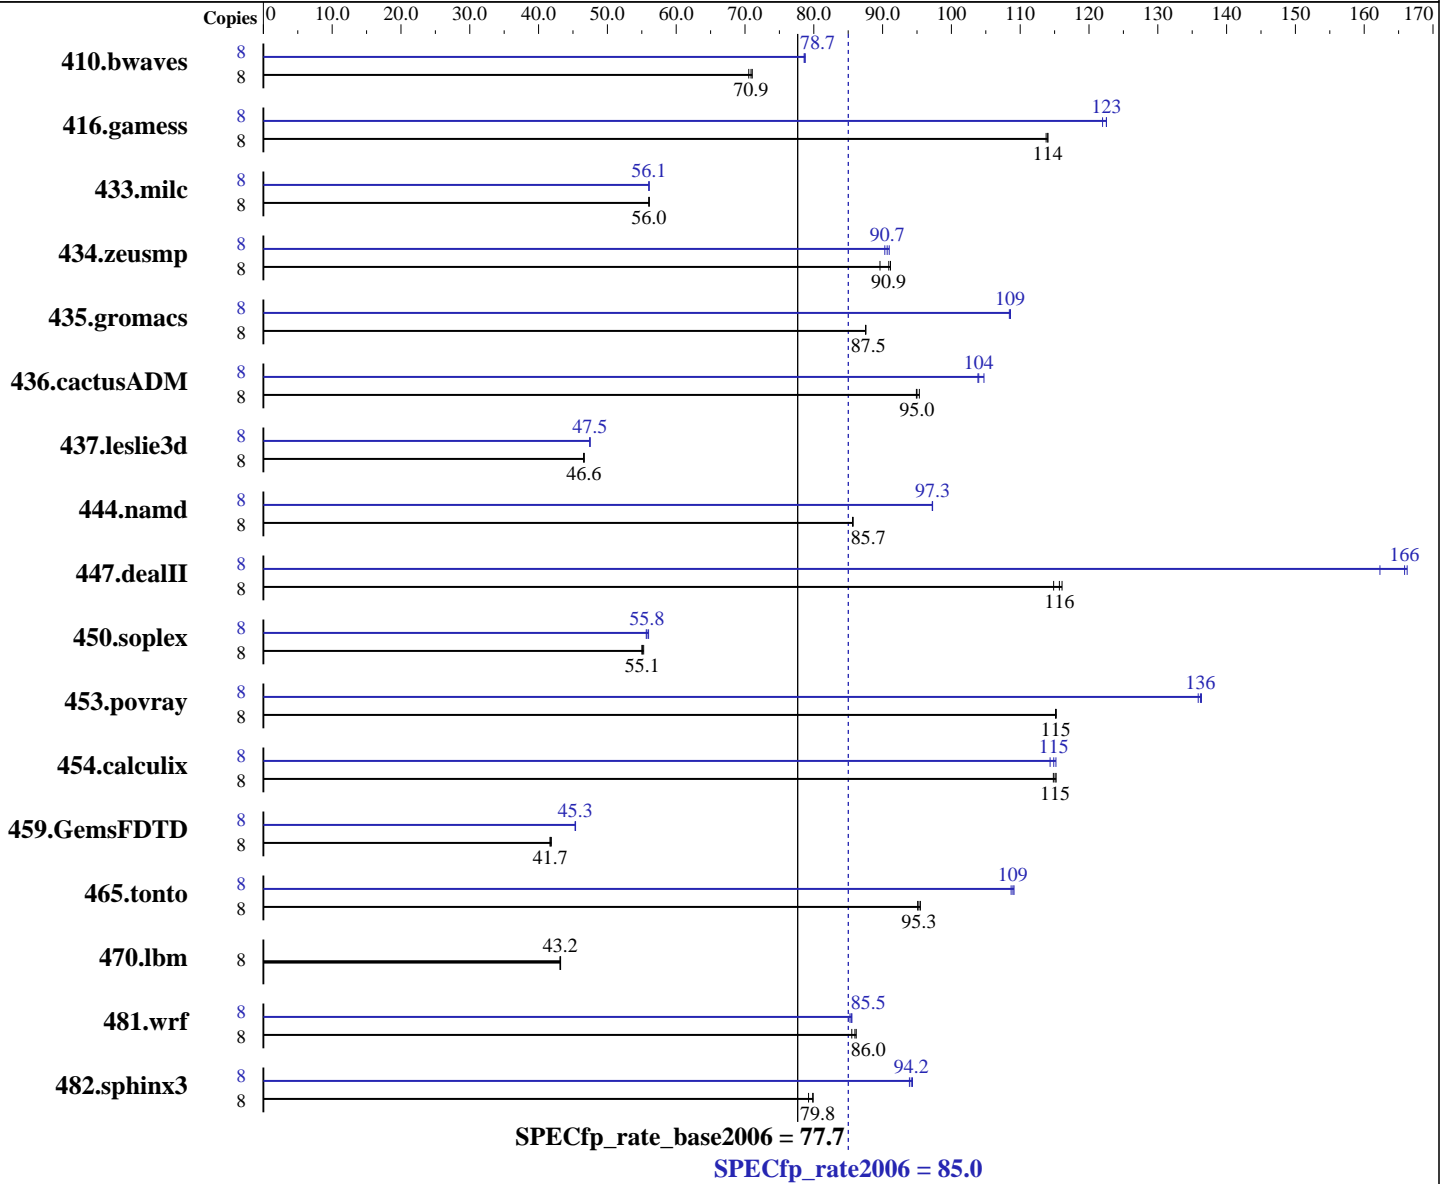

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-5300P CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Other Software: binutils-2.18.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1541	70.5	1530	71.1	1534	70.9	8	1381	78.8	1383	78.6	1382	78.7
416.gamess	8	1377	114	1374	114	1374	114	8	1278	123	1278	123	1284	122
433.milc	8	1310	56.0	1311	56.0	1309	56.1	8	1310	56.1	1310	56.1	1310	56.0
434.zeusmp	8	801	90.9	812	89.6	799	91.2	8	803	90.7	806	90.3	800	91.0
435.gromacs	8	652	87.6	653	87.5	653	87.5	8	526	109	527	108	526	109
436.cactusADM	8	1006	95.0	1003	95.3	1007	94.9	8	913	105	919	104	920	104
437.leslie3d	8	1613	46.6	1614	46.6	1616	46.5	8	1584	47.5	1585	47.4	1584	47.5
444.namd	8	749	85.7	749	85.6	749	85.7	8	660	97.3	660	97.3	660	97.2
447.dealII	8	791	116	788	116	797	115	8	552	166	551	166	564	162
450.soplex	8	1207	55.3	1211	55.1	1213	55.0	8	1192	56.0	1199	55.7	1197	55.8
453.povray	8	370	115	369	115	370	115	8	313	136	312	136	312	136
454.calculix	8	575	115	574	115	573	115	8	575	115	573	115	577	114
459.GemsFDTD	8	2035	41.7	2037	41.7	2028	41.9	8	1871	45.4	1872	45.3	1873	45.3
465.tonto	8	824	95.5	826	95.3	828	95.1	8	722	109	724	109	723	109
470.lbm	8	2544	43.2	2547	43.2	2549	43.1	8	2544	43.2	2547	43.2	2549	43.1
481.wrf	8	1039	86.0	1045	85.5	1037	86.2	8	1048	85.3	1045	85.5	1046	85.5
482.sphinx3	8	1968	79.2	1953	79.8	1951	79.9	8	1653	94.3	1656	94.2	1660	93.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

482.sphinx3: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -Ofast -LNO:vintr=2
-CG:locs_shallow_depth=1

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnw -OPT:unroll_size=256
-CG:load_exe=0

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -m3dnw -LANG:copyinout=off
-IPA:callee_limit=5000

Peak Other Flags

C benchmarks (except as noted below):

-w

482.sphinx3: No flags used

C++ benchmarks:

444.namd: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 85.0

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECfp_rate_base2006 = 77.7

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Other Flags (Continued)

Fortran benchmarks:

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:38:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.