



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55


Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

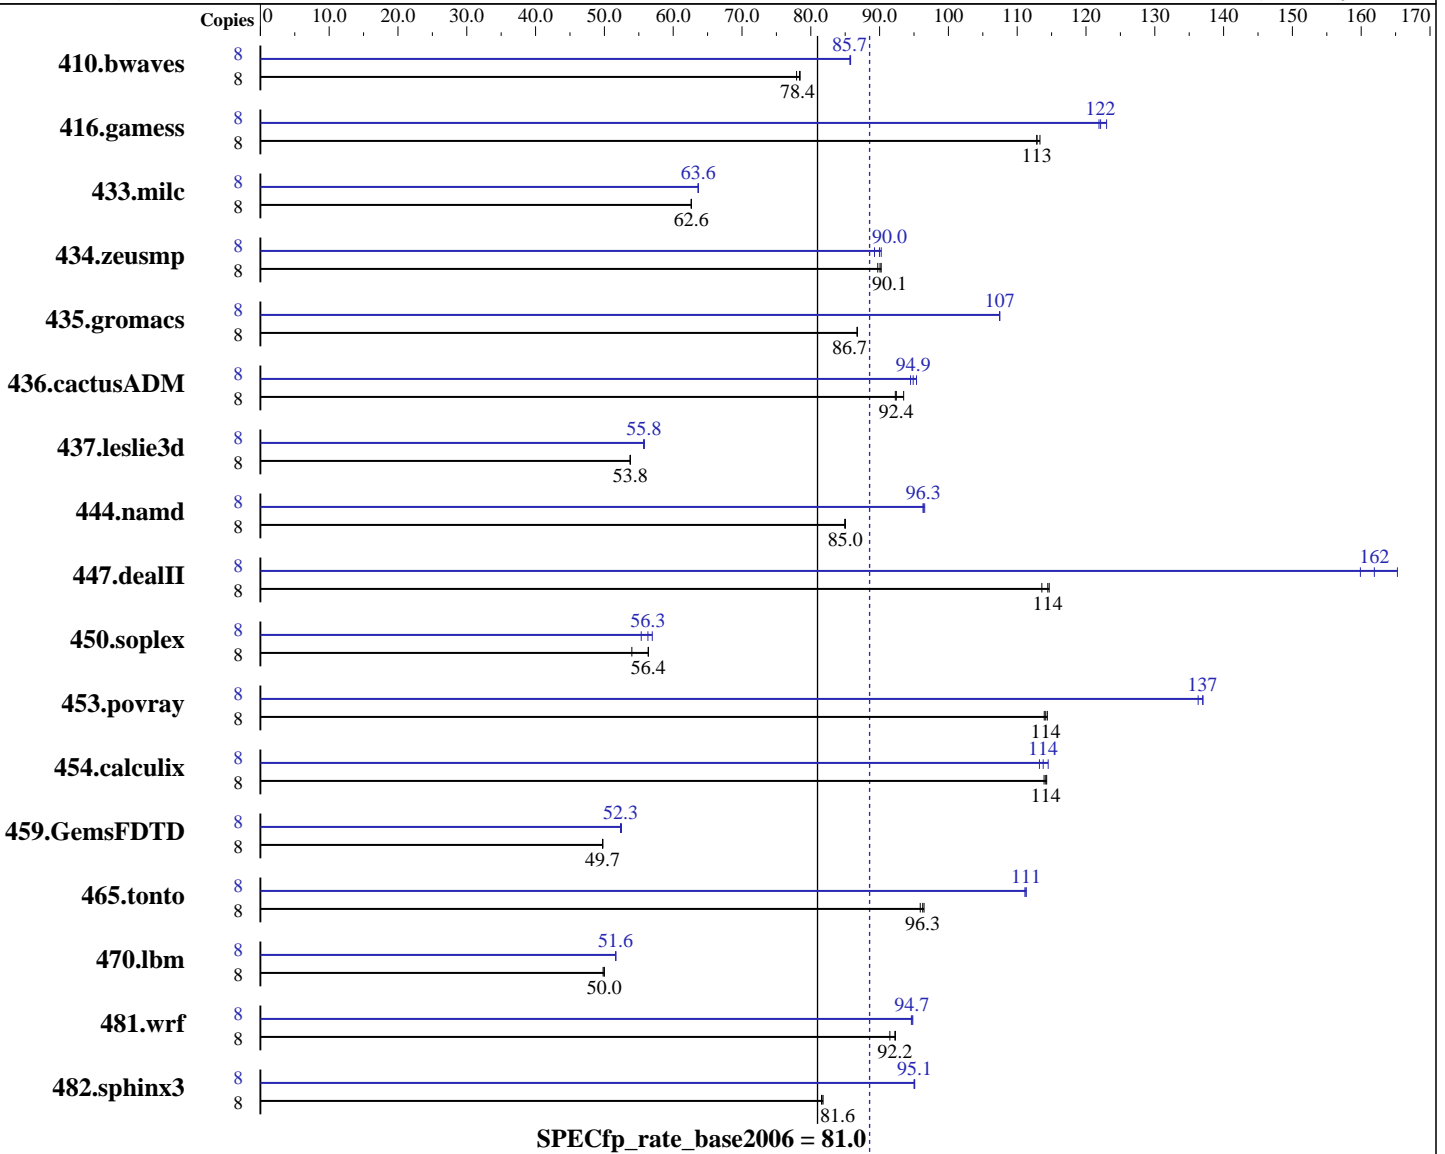

### Hardware

CPU Name: AMD Opteron 2356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB, DDR2-667, CL5, Reg, Dual Rank)  
Disk Subsystem: 2 x 250 GB 7200 RPM SATA (RAID 0)  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1395	77.9	1386	78.4	<b>1387</b>	<b>78.4</b>	8	1267	85.8	<b>1268</b>	<b>85.7</b>	1269	85.7
416.gamess	8	1382	113	<b>1388</b>	<b>113</b>	1388	113	8	<b>1283</b>	<b>122</b>	1285	122	1274	123
433.milc	8	1172	62.7	<b>1172</b>	<b>62.6</b>	1173	62.6	8	1153	63.7	1154	63.6	<b>1154</b>	<b>63.6</b>
434.zeusmp	8	<b>808</b>	<b>90.1</b>	811	89.7	807	90.2	8	816	89.3	<b>809</b>	<b>90.0</b>	807	90.2
435.gromacs	8	658	86.8	<b>658</b>	<b>86.7</b>	658	86.7	8	532	107	<b>532</b>	<b>107</b>	532	107
436.cactusADM	8	<b>1034</b>	<b>92.4</b>	1022	93.5	1036	92.3	8	1012	94.5	1002	95.4	<b>1008</b>	<b>94.9</b>
437.leslie3d	8	1398	53.8	1399	53.7	<b>1399</b>	<b>53.8</b>	8	1347	55.8	1350	55.7	<b>1349</b>	<b>55.8</b>
444.namd	8	755	84.9	<b>755</b>	<b>85.0</b>	755	85.0	8	666	96.3	<b>666</b>	<b>96.3</b>	664	96.6
447.dealII	8	798	115	<b>800</b>	<b>114</b>	806	114	8	554	165	<b>565</b>	<b>162</b>	572	160
450.soplex	8	1236	54.0	1183	56.4	<b>1184</b>	<b>56.4</b>	8	1205	55.4	<b>1184</b>	<b>56.3</b>	1171	57.0
453.povray	8	372	114	<b>373</b>	<b>114</b>	374	114	8	312	136	311	137	<b>311</b>	<b>137</b>
454.calculix	8	<b>578</b>	<b>114</b>	578	114	579	114	8	583	113	576	115	<b>580</b>	<b>114</b>
459.GemsFDTD	8	1705	49.8	1707	49.7	<b>1706</b>	<b>49.7</b>	8	1617	52.5	<b>1621</b>	<b>52.3</b>	1621	52.3
465.tonto	8	<b>818</b>	<b>96.3</b>	816	96.5	821	95.9	8	<b>707</b>	<b>111</b>	708	111	707	111
470.lbm	8	<b>2200</b>	<b>50.0</b>	2207	49.8	2199	50.0	8	2128	51.6	2128	51.7	<b>2128</b>	<b>51.6</b>
481.wrf	8	977	91.5	968	92.3	<b>969</b>	<b>92.2</b>	8	944	94.6	<b>943</b>	<b>94.7</b>	942	94.8
482.sphinx3	8	1912	81.6	<b>1910</b>	<b>81.6</b>	1906	81.8	8	1640	95.1	1641	95.0	<b>1640</b>	<b>95.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set /proc/sys/vm/nr_hugepages=1200
mount -t hugetlbfs nodev /mnt/hugepages
```

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pgcpp

Fortran benchmarks:  
pgf95

Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags (Continued)

436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed  
 -Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr  
 -Mipa=shape -tp barcelona-64 -Bstatic\_pgi  
 470.lbm: -march=barcelona -Ofast -m3dnow  
 482.sphinx3: -march=barcelona -Ofast

### C++ benchmarks:

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed  
 -Msmartalloc=huge:150 --zc\_eh -Mnodepchk -Munroll=n:4  
 -Munroll=m:8 -tp barcelona-64 -Bstatic\_pgi  
 447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -OPT:malloc\_alg=1 -m32 -fno-exceptions  
 450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -TENV:frame\_pointer=off  
 -LNO:prefetch=1  
 453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:load\_exe=0

### Fortran benchmarks:

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed  
 -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta  
 -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast  
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnow  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

410.bwaves: -w

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 88.5

PowerEdge T605 (AMD Opteron 2356, 2.30 GHz)

SPECfp\_rate\_base2006 = 81.0

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Other Flags (Continued)

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 16:46:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 April 2008.