



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 193

PowerEdge R905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECint_rate_base2006 = 167

CPU2006 license: 55


Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

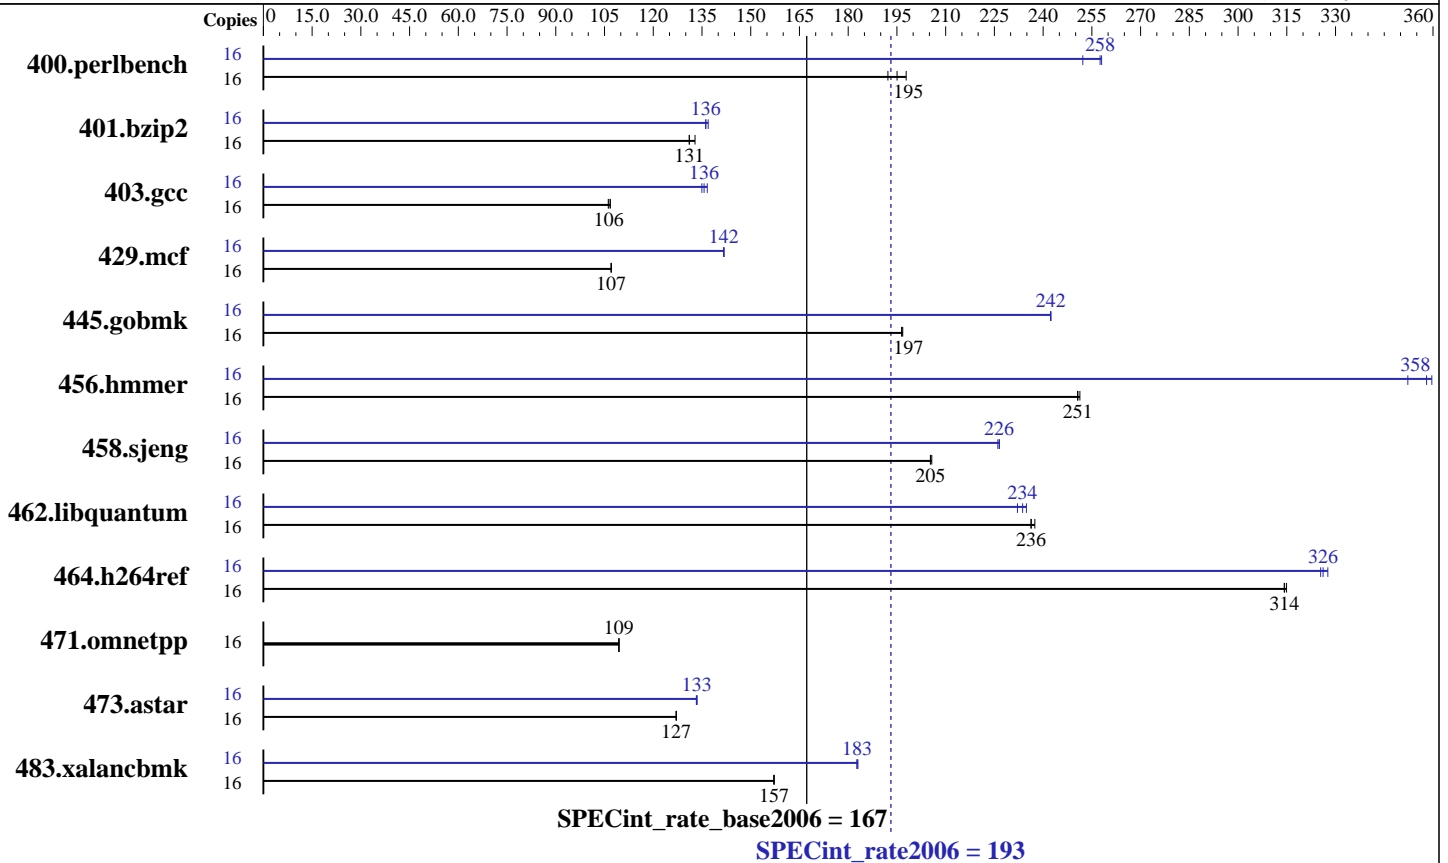

Hardware

CPU Name: AMD Opteron 8360 SE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16x2GB, DDR2-667, CL5, Reg, Dual Rank)
 Disk Subsystem: 2x73 SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECint_rate_base2006 = 167

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	790	198	<u>801</u>	<u>195</u>	813	192	16	620	252	<u>607</u>	<u>258</u>	606	258
401.bzip2	16	1162	133	1178	131	<u>1178</u>	<u>131</u>	16	<u>1134</u>	<u>136</u>	1134	136	1128	137
403.gcc	16	1213	106	<u>1211</u>	<u>106</u>	1206	107	16	943	137	<u>950</u>	<u>136</u>	954	135
429.mcf	16	1363	107	1363	107	<u>1363</u>	<u>107</u>	16	1029	142	<u>1029</u>	<u>142</u>	1030	142
445.gobmk	16	<u>854</u>	<u>197</u>	854	196	853	197	16	<u>693</u>	<u>242</u>	692	242	693	242
456.hmmer	16	594	251	<u>595</u>	<u>251</u>	596	251	16	424	352	<u>417</u>	<u>358</u>	415	360
458.sjeng	16	<u>943</u>	<u>205</u>	941	206	943	205	16	<u>855</u>	<u>226</u>	856	226	855	227
462.libquantum	16	1396	237	<u>1403</u>	<u>236</u>	1403	236	16	<u>1419</u>	<u>234</u>	1428	232	1412	235
464.h264ref	16	1124	315	<u>1126</u>	<u>314</u>	1127	314	16	1081	328	1088	325	<u>1086</u>	<u>326</u>
471.omnetpp	16	914	109	914	109	<u>914</u>	<u>109</u>	16	914	109	914	109	<u>914</u>	<u>109</u>
473.astar	16	884	127	<u>884</u>	<u>127</u>	884	127	16	<u>842</u>	<u>133</u>	843	133	841	134
483.xalancbmk	16	703	157	702	157	<u>702</u>	<u>157</u>	16	603	183	604	183	<u>604</u>	<u>183</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECint_rate_base2006 = 167

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

gcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECint_rate_base2006 = 167

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
           -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
           -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
          -Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
            -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
            -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
            -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
            -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
            -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
            -fastsse -Msmartalloc=huge:150 -Mfprelaxed
            -tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
                -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
                -tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
              -Mipa=fast(pass 2) -Mipa=inline(pass 2)
              -Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
              -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECint_rate_base2006 = 167

CPU2006 license: 55

Test date: Apr-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:18:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.