



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

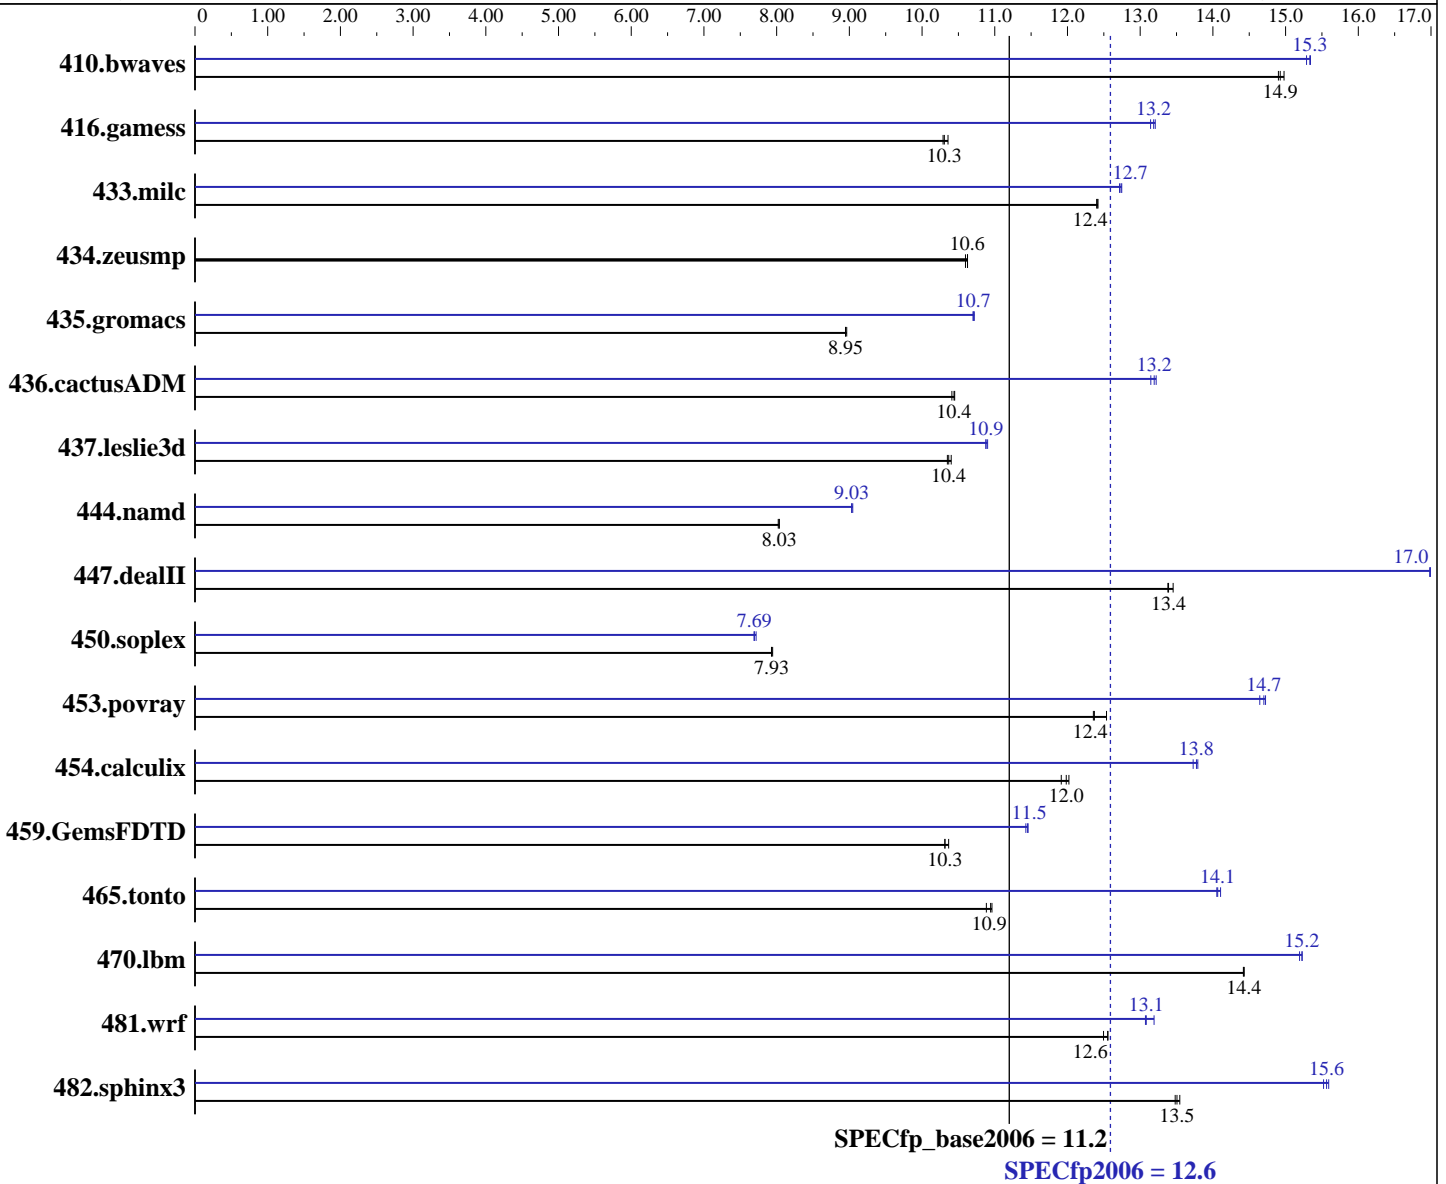

Hardware

CPU Name: AMD Opteron 8350
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16 x 2 GB, DDR2-667 CL5 Reg Dual Rank)
Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	910	14.9	912	14.9	907	15.0	889	15.3	886	15.3	886	15.3
416.gamess	1903	10.3	1900	10.3	1890	10.4	1485	13.2	1482	13.2	1490	13.1
433.milc	739	12.4	740	12.4	740	12.4	720	12.7	722	12.7	721	12.7
434.zeusmp	856	10.6	856	10.6	859	10.6	856	10.6	856	10.6	859	10.6
435.gromacs	797	8.96	798	8.95	798	8.95	667	10.7	666	10.7	667	10.7
436.cactusADM	1145	10.4	1144	10.4	1148	10.4	904	13.2	909	13.1	906	13.2
437.leslie3d	908	10.3	904	10.4	907	10.4	862	10.9	864	10.9	864	10.9
444.namd	1000	8.02	998	8.04	998	8.03	888	9.03	886	9.05	888	9.03
447.dealII	850	13.5	855	13.4	854	13.4	673	17.0	673	17.0	674	17.0
450.soplex	1050	7.94	1052	7.93	1051	7.93	1081	7.72	1085	7.69	1084	7.69
453.povray	430	12.4	431	12.4	424	12.5	363	14.6	361	14.7	362	14.7
454.calculix	692	11.9	686	12.0	688	12.0	598	13.8	599	13.8	601	13.7
459.GemsFDTD	1029	10.3	1029	10.3	1024	10.4	926	11.5	926	11.5	928	11.4
465.tonto	899	10.9	898	11.0	904	10.9	700	14.1	700	14.1	698	14.1
470.lbm	953	14.4	952	14.4	952	14.4	902	15.2	904	15.2	902	15.2
481.wrf	894	12.5	890	12.6	890	12.6	847	13.2	854	13.1	854	13.1
482.sphinx3	1446	13.5	1443	13.5	1439	13.5	1250	15.6	1256	15.5	1252	15.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 896
Set vm/nr_hugepages=3584 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
powersave -f was used to set the CPU frequency to its maximum.

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
-CG:locs_shallow_depth=1 -m3dnow

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge:150 -Mnodepchk -Mfprelaxed --zc_eh
-tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

```

410.bwaves: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -Mpre -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge:150 -Mprefetch=distance:8
-Mprefetch=t0 -Mfprefetch -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:150 -Mfprefetch -Mfpapprox=rsqrt
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Msmartalloc=huge:150 -Mprefetch=t0 -Mpre -Mfprefetch
-tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc
-Mprefetch=distance:8 -Mfprefetch -tp barcelona-64
-Bstatic_pgi

Peak Other Flags

C benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

470.lbm: No flags used

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 12.6

IBM System x3755 (AMD Opteron 8350)

SPECfp_base2006 = 11.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Other Flags (Continued)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

436.cactusADM: No flags used

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:34:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 July 2008.