



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 26.3

IBM System x3350 (Intel Xeon E3120)

SPECint\_base2006 = 22.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

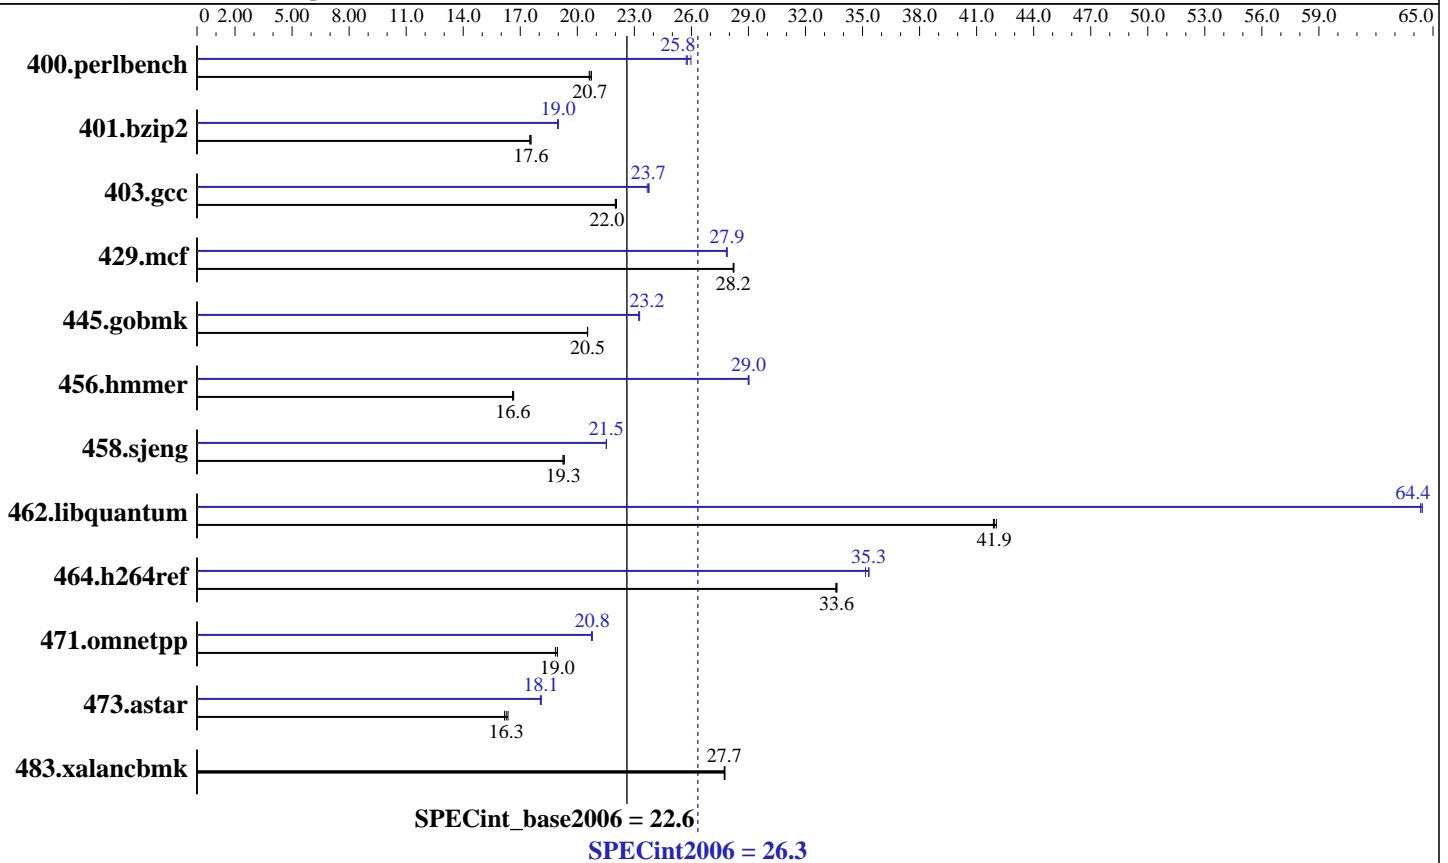

## Hardware

CPU Name: Intel Xeon E3120  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3166  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB DDR2-6400E ECC)  
 Disk Subsystem: 1 x 160 GB SATA, 7200RPM  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 26.3

IBM System x3350 (Intel Xeon E3120)

SPECint\_base2006 = 22.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>473</u></b>	<b><u>20.7</u></b>	471	20.7	474	20.6	376	26.0	380	25.7	<b><u>379</u></b>	<b><u>25.8</u></b>
401.bzip2	552	17.5	549	17.6	<b><u>550</u></b>	<b><u>17.6</u></b>	<b><u>508</u></b>	<b><u>19.0</u></b>	508	19.0	509	19.0
403.gcc	365	22.1	<b><u>366</u></b>	<b><u>22.0</u></b>	366	22.0	339	23.8	340	23.7	<b><u>339</u></b>	<b><u>23.7</u></b>
429.mcf	323	28.2	<b><u>323</u></b>	<b><u>28.2</u></b>	323	28.2	<b><u>327</u></b>	<b><u>27.9</u></b>	328	27.8	327	27.9
445.gobmk	511	20.5	511	20.5	<b><u>511</u></b>	<b><u>20.5</u></b>	451	23.3	<b><u>451</u></b>	<b><u>23.2</u></b>	451	23.2
456.hmmmer	560	16.7	562	16.6	<b><u>561</u></b>	<b><u>16.6</u></b>	<b><u>322</u></b>	<b><u>29.0</u></b>	322	29.0	321	29.0
458.sjeng	626	19.3	<b><u>628</u></b>	<b><u>19.3</u></b>	628	19.3	562	21.5	562	21.5	<b><u>562</u></b>	<b><u>21.5</u></b>
462.libquantum	<b><u>494</u></b>	<b><u>41.9</u></b>	493	42.0	495	41.9	322	64.4	322	64.4	<b><u>322</u></b>	<b><u>64.4</u></b>
464.h264ref	<b><u>658</u></b>	<b><u>33.6</u></b>	658	33.7	659	33.6	626	35.3	<b><u>627</u></b>	<b><u>35.3</u></b>	629	35.2
471.omnetpp	330	19.0	<b><u>330</u></b>	<b><u>19.0</u></b>	332	18.8	301	20.8	301	20.7	<b><u>301</u></b>	<b><u>20.8</u></b>
473.astar	<b><u>432</u></b>	<b><u>16.3</u></b>	429	16.4	434	16.2	388	18.1	<b><u>388</u></b>	<b><u>18.1</u></b>	389	18.1
483.xalancbmk	248	27.8	249	27.7	<b><u>249</u></b>	<b><u>27.7</u></b>	248	27.8	249	27.7	<b><u>249</u></b>	<b><u>27.7</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode  
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to null

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 26.3

IBM System x3350 (Intel Xeon E3120)

SPECint\_base2006 = 22.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 26.3

IBM System x3350 (Intel Xeon E3120)

SPECint\_base2006 = 22.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	26.3
-----------------	---------------	------

IBM System x3350 (Intel Xeon E3120)	SPECint_base2006 =	22.6
-------------------------------------	--------------------	------

<b>CPU2006 license:</b> 11	<b>Test date:</b> Jun-2008
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Sep-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Nov-2007

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
 Report generated on Tue Jul 22 18:59:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 2 September 2008.