



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

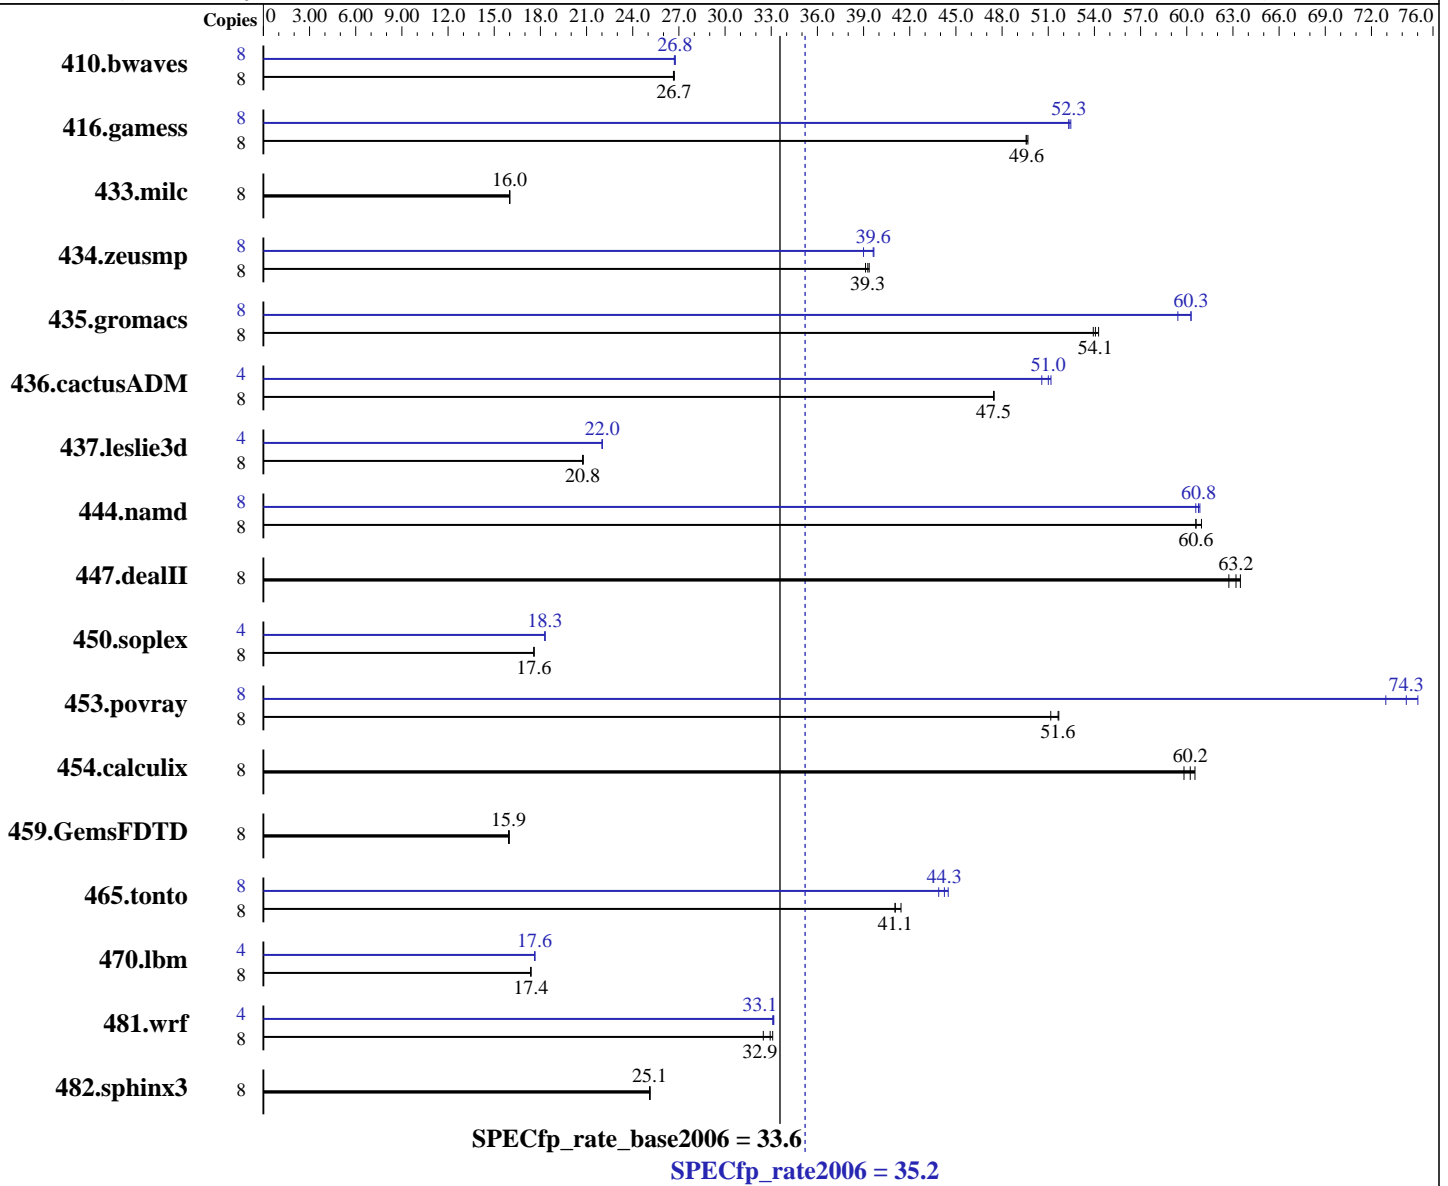

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2520
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 10/08
 Compiler: Sun Studio 12 with patches
 124861-08, 124863-06, 124867-07, 127143-03,
 127000-05, 127001-01
 (see patch information below)

Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (2 GB x 8), 2-way interleaved
Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
Other Hardware: None

Peak Pointers: 32-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4071	26.7	4076	26.7	4080	26.6	8	4071	26.7	4063	26.8	4064	26.8
416.gamess	8	3158	49.6	3161	49.6	3153	49.7	8	2993	52.3	2993	52.3	2986	52.5
433.milc	8	4589	16.0	4592	16.0	4586	16.0	8	4589	16.0	4592	16.0	4586	16.0
434.zeusmp	8	1849	39.4	1854	39.3	1861	39.1	8	1835	39.7	1837	39.6	1867	39.0
435.gromacs	8	1052	54.3	1057	54.1	1059	53.9	8	948	60.3	961	59.4	948	60.3
436.cactusADM	8	2014	47.5	2015	47.5	2014	47.5	4	937	51.0	945	50.6	934	51.2
437.leslie3d	8	3625	20.7	3624	20.8	3617	20.8	4	1709	22.0	1708	22.0	1707	22.0
444.namd	8	1053	61.0	1059	60.6	1059	60.6	8	1056	60.8	1059	60.6	1054	60.9
447.dealII	8	1442	63.5	1459	62.7	1448	63.2	8	1442	63.5	1459	62.7	1448	63.2
450.soplex	8	3795	17.6	3794	17.6	3794	17.6	4	1824	18.3	1823	18.3	1823	18.3
453.povray	8	823	51.7	832	51.2	824	51.6	8	584	72.9	567	75.0	573	74.3
454.calculix	8	1103	59.8	1090	60.5	1096	60.2	8	1103	59.8	1090	60.5	1096	60.2
459.GemsFDTD	8	5324	15.9	5311	16.0	5328	15.9	8	5324	15.9	5311	16.0	5328	15.9
465.tonto	8	1918	41.0	1900	41.4	1917	41.1	8	1779	44.3	1794	43.9	1769	44.5
470.lbm	8	6327	17.4	6324	17.4	6323	17.4	4	3118	17.6	3117	17.6	3115	17.6
481.wrf	8	2751	32.5	2714	32.9	2700	33.1	4	1350	33.1	1347	33.2	1348	33.1
482.sphinx3	8	6211	25.1	6204	25.1	6214	25.1	8	6211	25.1	6204	25.1	6214	25.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Operating System Notes

Shell Environments:
Default setting.

System Tunables:
(/etc/system parameters)

```
tune_t_fsflushr=10
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autoup=600
Causes pages older than the listed number of seconds to
be written by fsflush.
bufhwm=3000
Memory byte limit for caching I/O buffers.
segmap_percent=1
Set maximum percent memory for file system cache.
```

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server. Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Oct-2008

Tested by: Fujitsu Limited

Software Availability: Oct-2008

Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1
-xalias_level=std -xprefetch_auto_type=indirect_array_access

C++ benchmarks:

-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=1 -xalias_level=compatible

Fortran benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1

Benchmarks using both Fortran and C:

-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=1 -xalias_level=std
-xprefetch_auto_type=indirect_array_access

Base Other Flags

C benchmarks:

-xjobs=4

C++ benchmarks:

-xjobs=4

Fortran benchmarks:

-xjobs=4

Benchmarks using both Fortran and C:

-xjobs=4

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=3
-xvector -xarch=generic

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xdepend -xalias_level=compatible

447.dealII: basepeak = yes

450.soplex: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=1
-xpagesize=4M -xprefetch=no -fsimple=0 -xrestrict -xdepend
-xalias_level=compatible

453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2
-xpagesize=4M -xdepend -xalias_level=compatible

Fortran benchmarks:

410.bwaves: -fast -xipo=2 -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2
-xpagesize=4M

434.zeusmp: -fast -fma=fused -xipo=2 -xpagesize=4M -lmopt

437.leslie3d: -fast -fma=fused -xipo=2 -xpagesize=4M

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xipo=2 -xpagesize=4M -xinline= -xchip=generic
-fsimple=0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 35.2

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 33.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

436.cactusADM: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access

454.calculix: basepeak = yes

481.wrf: Same as 436.cactusADM

Peak Other Flags

C benchmarks:
-xjobs=4

C++ benchmarks:
-xjobs=4

Fortran benchmarks:
-xjobs=4

Benchmarks using both Fortran and C:
-xjobs=4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:17:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.