



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 144

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 131

CPU2006 license: 55


Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

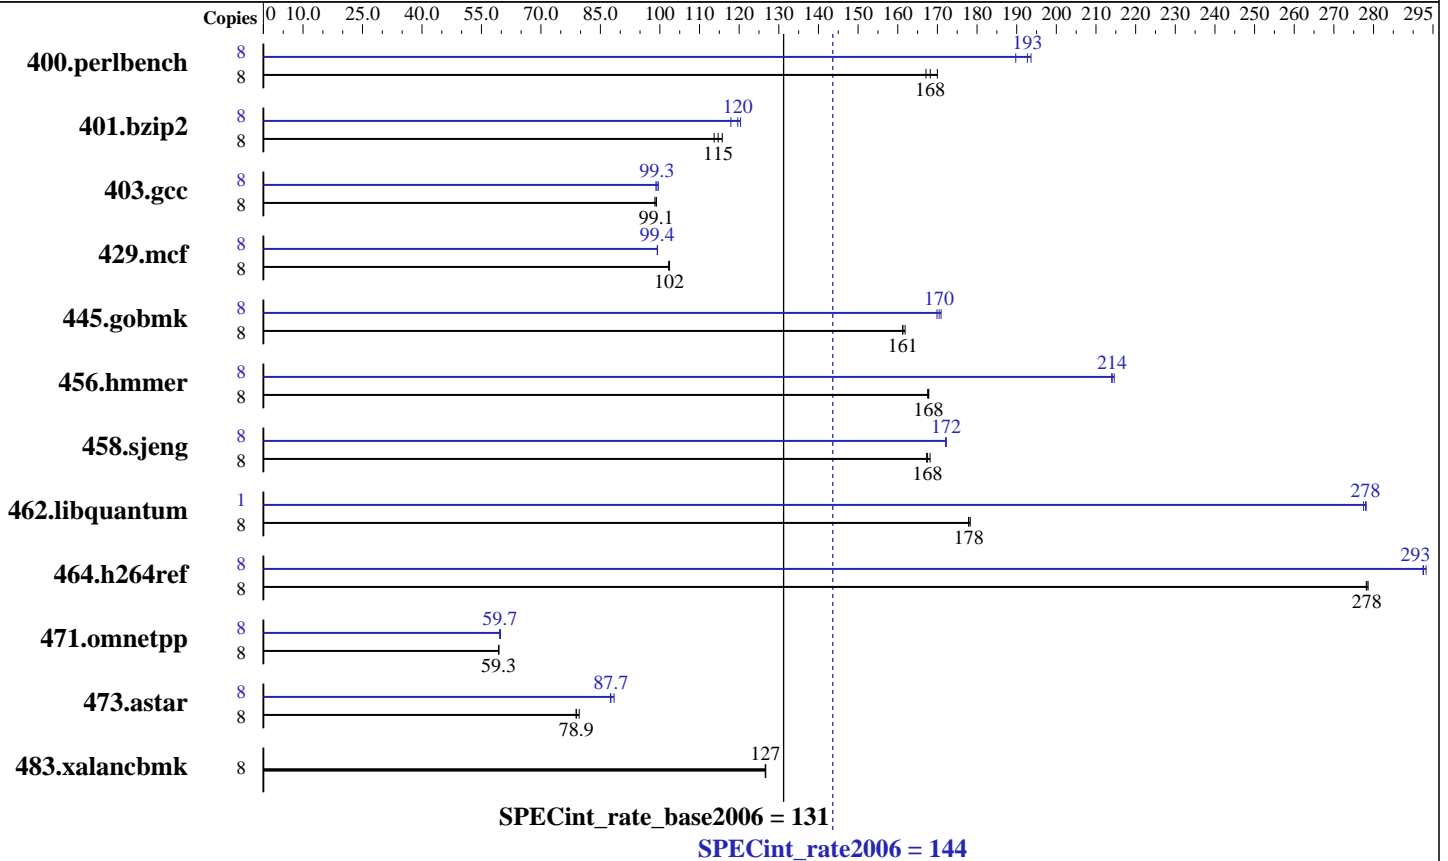

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics:
 CPU MHz: 3166
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-667 FB-DIMM)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502
 Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 144

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 131

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	468	167	<u>465</u>	<u>168</u>	460	170	8	<u>406</u>	<u>193</u>	412	190	404	194
401.bzip2	8	<u>673</u>	<u>115</u>	679	114	667	116	8	<u>645</u>	<u>120</u>	655	118	641	120
403.gcc	8	650	99.1	<u>650</u>	<u>99.1</u>	652	98.8	8	650	99.0	646	99.6	<u>649</u>	<u>99.3</u>
429.mcf	8	712	102	<u>713</u>	<u>102</u>	714	102	8	734	99.4	734	99.3	<u>734</u>	<u>99.4</u>
445.gobmk	8	<u>520</u>	<u>161</u>	520	161	518	162	8	491	171	<u>492</u>	<u>170</u>	494	170
456.hammer	8	445	168	445	168	<u>445</u>	<u>168</u>	8	348	215	349	214	<u>349</u>	<u>214</u>
458.sjeng	8	<u>578</u>	<u>168</u>	576	168	579	167	8	<u>562</u>	<u>172</u>	562	172	563	172
462.libquantum	8	932	178	<u>932</u>	<u>178</u>	930	178	1	74.5	278	74.7	277	<u>74.5</u>	<u>278</u>
464.h264ref	8	<u>636</u>	<u>278</u>	635	279	636	278	8	604	293	<u>605</u>	<u>293</u>	605	292
471.omnetpp	8	843	59.3	<u>842</u>	<u>59.3</u>	842	59.4	8	839	59.6	<u>838</u>	<u>59.7</u>	836	59.8
473.astar	8	<u>711</u>	<u>78.9</u>	705	79.7	712	78.9	8	641	87.5	635	88.5	<u>641</u>	<u>87.7</u>
483.xalancbmk	8	<u>436</u>	<u>127</u>	436	127	436	127	8	<u>436</u>	<u>127</u>	436	127	436	127

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)

General Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 144

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 131

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 144

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 131

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
 -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -parallel -par-runtime-control
 -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -ansi-alias -opt-ra-region-strategy=block
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 144

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate_base2006 = 131

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:18:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.