



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## FORMAT

SPECint<sup>®</sup>\_rate2006 = 64.2

FORMAT R1520ML (2.5 GHz Intel Xeon X3320)

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 9015


Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

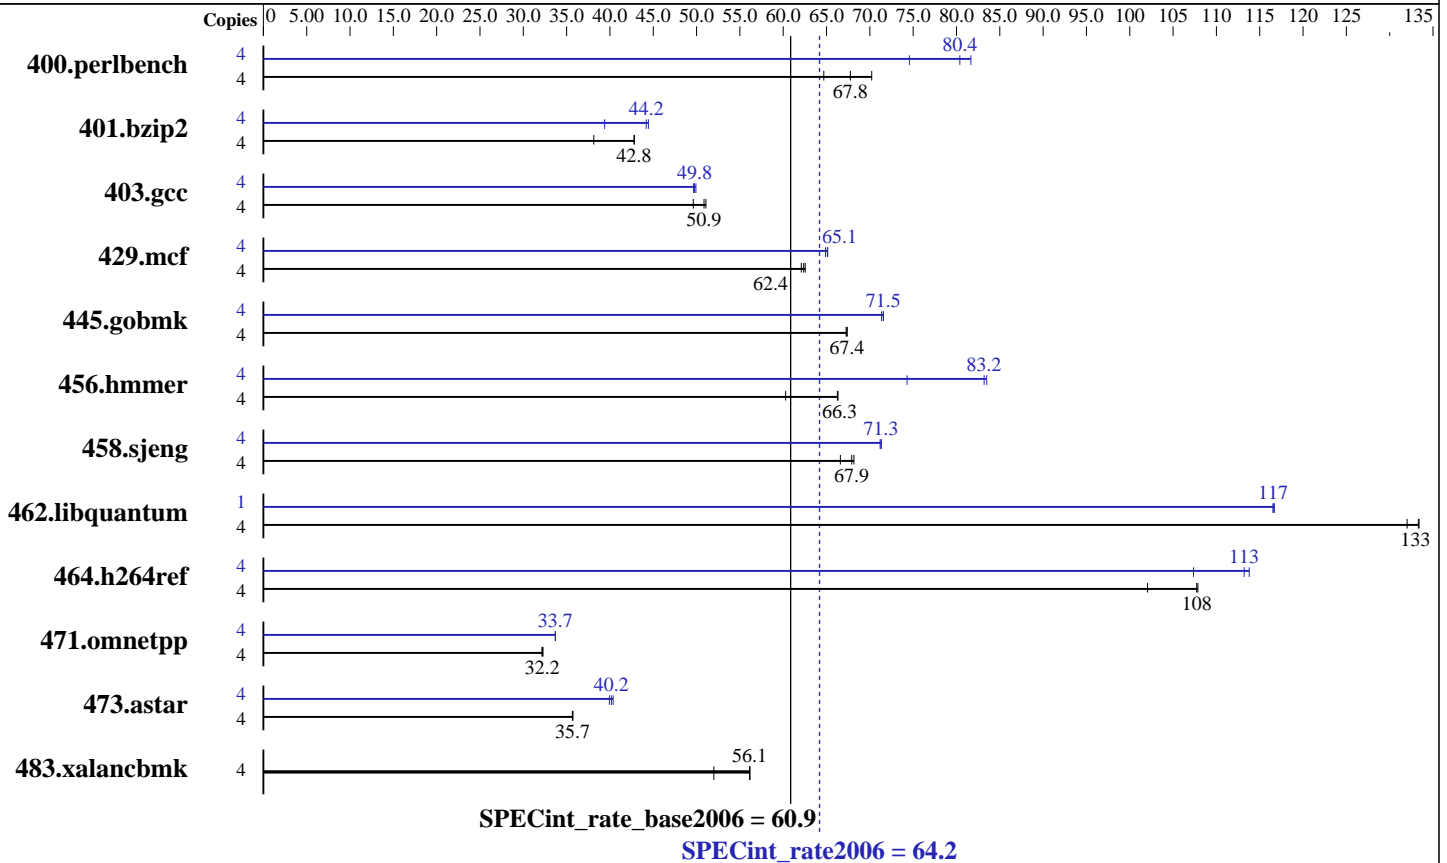

### Hardware

CPU Name: Intel Xeon X3320  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB ECC DDR2 SDRAM)  
 Disk Subsystem: 1 x 160 GB SATA, 5400 RPM  
 Other Hardware: None

### Software

Operating System: Scientific Linux 5.2 2.6.18-92.1.13.el5  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20080730 Package ID: l\_cproc\_b\_11.0.0422  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## FORMAT

SPECint\_rate2006 = 64.2

FORMAT R1520ML (2.5 GHz Intel Xeon X3320)

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 9015

Test date: Oct-2008

Test sponsor: FORMAT

Hardware Availability: Aug-2008

Tested by: FORMAT

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	604	64.7	<u>577</u>	<u>67.8</u>	557	70.2	4	524	74.6	479	81.7	<u>486</u>	<u>80.4</u>
401.bzip2	4	1012	38.1	<u>902</u>	<u>42.8</u>	901	42.8	4	980	39.4	<u>874</u>	<u>44.2</u>	869	44.4
403.gcc	4	<u>633</u>	<u>50.9</u>	630	51.1	649	49.6	4	<u>647</u>	<u>49.8</u>	645	49.9	649	49.6
429.mcf	4	588	62.1	<u>585</u>	<u>62.4</u>	583	62.5	4	562	64.9	560	65.1	<u>560</u>	<u>65.1</u>
445.gobmk	4	624	67.3	<u>623</u>	<u>67.4</u>	623	67.4	4	588	71.4	<u>586</u>	<u>71.5</u>	586	71.6
456.hammer	4	619	60.3	<u>563</u>	<u>66.3</u>	563	66.3	4	502	74.3	447	83.5	<u>449</u>	<u>83.2</u>
458.sjeng	4	<u>713</u>	<u>67.9</u>	727	66.6	710	68.2	4	<u>679</u>	<u>71.3</u>	680	71.2	679	71.3
462.libquantum	4	621	133	628	132	<u>622</u>	<u>133</u>	1	<u>178</u>	<u>117</u>	178	117	178	117
464.h264ref	4	867	102	<u>822</u>	<u>108</u>	821	108	4	825	107	<u>782</u>	<u>113</u>	778	114
471.omnetpp	4	775	32.3	<u>776</u>	<u>32.2</u>	777	32.2	4	741	33.7	<u>742</u>	<u>33.7</u>	742	33.7
473.astar	4	<u>787</u>	<u>35.7</u>	787	35.7	786	35.7	4	703	39.9	<u>699</u>	<u>40.2</u>	696	40.4
483.xalancbmk	4	531	52.0	<u>492</u>	<u>56.1</u>	491	56.2	4	531	52.0	<u>492</u>	<u>56.1</u>	491	56.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
taskset was used to bind processes to cores except
for 462.libquantum peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## FORMAT

SPECint\_rate2006 = 64.2

FORMAT R1520ML (2.5 GHz Intel Xeon X3320)

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 9015

Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## FORMAT

SPECint\_rate2006 = 64.2

FORMAT R1520ML (2.5 GHz Intel Xeon X3320)

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 9015

Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -par-runtime-control  
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## FORMAT

SPECint\_rate2006 = 64.2

FORMAT R1520ML (2.5 GHz Intel Xeon X3320)

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 9015

Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:50:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 November 2008.