



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55


Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

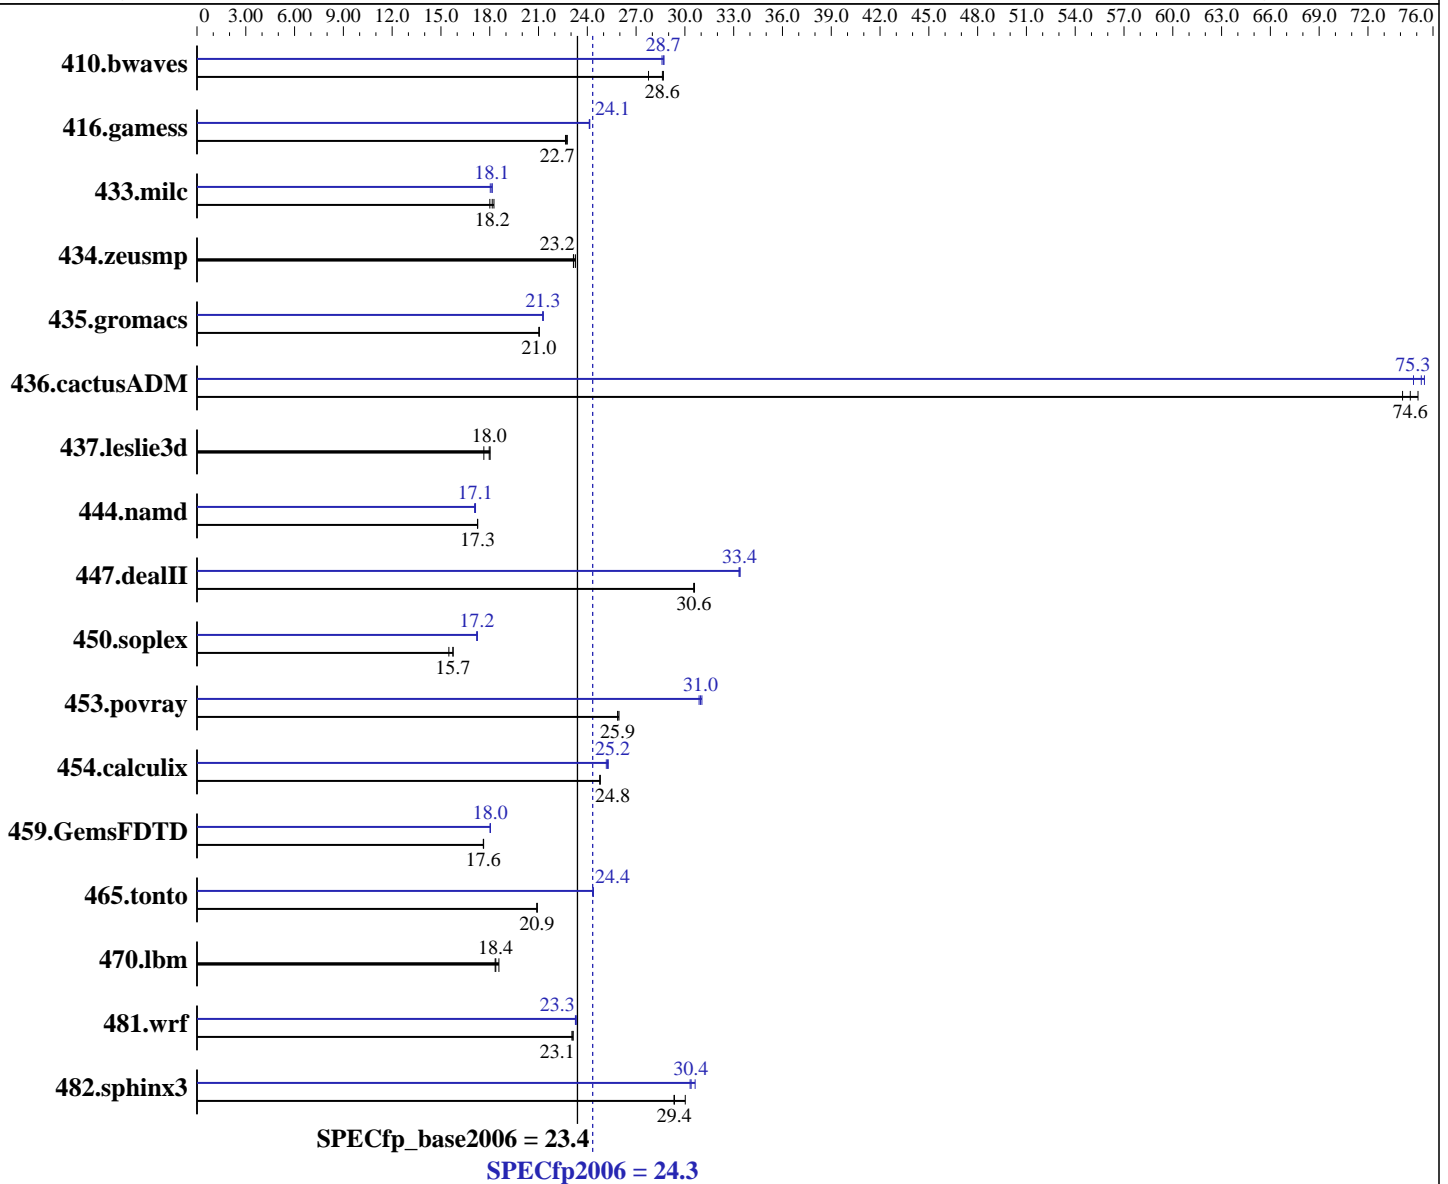

### Hardware

CPU Name: Intel Xeon X5460  
 CPU Characteristics:  
 CPU MHz: 3166  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (4 x 4 GB DDR2-667 FBDIMM)  
Disk Subsystem: 2 x 36 GB SAS, 15k RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	489	27.8	474	28.7	<b>475</b>	<b>28.6</b>	475	28.6	473	28.7	<b>474</b>	<b>28.7</b>
416.gamess	860	22.8	<b>862</b>	<b>22.7</b>	864	22.7	<b>811</b>	<b>24.1</b>	811	24.2	812	24.1
433.milc	510	18.0	503	18.3	<b>506</b>	<b>18.2</b>	509	18.0	<b>506</b>	<b>18.1</b>	506	18.2
434.zeusmp	<b>393</b>	<b>23.2</b>	391	23.3	393	23.1	<b>393</b>	<b>23.2</b>	391	23.3	393	23.1
435.gromacs	339	21.0	340	21.0	<b>339</b>	<b>21.0</b>	335	21.3	336	21.3	<b>336</b>	<b>21.3</b>
436.cactusADM	161	74.1	<b>160</b>	<b>74.6</b>	159	75.1	160	74.8	158	75.5	<b>159</b>	<b>75.3</b>
437.leslie3d	533	17.6	522	18.0	<b>523</b>	<b>18.0</b>	533	17.6	522	18.0	<b>523</b>	<b>18.0</b>
444.namd	465	17.3	<b>465</b>	<b>17.3</b>	465	17.2	468	17.1	<b>469</b>	<b>17.1</b>	470	17.1
447.dealII	<b>374</b>	<b>30.6</b>	374	30.6	374	30.5	343	33.3	<b>343</b>	<b>33.4</b>	343	33.4
450.soplex	539	15.5	530	15.8	<b>530</b>	<b>15.7</b>	485	17.2	484	17.2	<b>485</b>	<b>17.2</b>
453.povray	<b>206</b>	<b>25.9</b>	206	25.9	205	25.9	172	30.9	<b>172</b>	<b>31.0</b>	171	31.0
454.calculix	<b>333</b>	<b>24.8</b>	333	24.8	333	24.8	328	25.2	<b>327</b>	<b>25.2</b>	326	25.3
459.GemsFDTD	602	17.6	603	17.6	<b>602</b>	<b>17.6</b>	588	18.0	<b>588</b>	<b>18.0</b>	588	18.0
465.tonto	471	20.9	<b>471</b>	<b>20.9</b>	470	20.9	404	24.4	404	24.3	<b>404</b>	<b>24.4</b>
470.lbm	740	18.6	749	18.3	<b>748</b>	<b>18.4</b>	740	18.6	749	18.3	<b>748</b>	<b>18.4</b>
481.wrf	485	23.1	483	23.1	<b>483</b>	<b>23.1</b>	480	23.3	479	23.3	<b>479</b>	<b>23.3</b>
482.sphinx3	649	30.0	<b>664</b>	<b>29.4</b>	664	29.3	<b>641</b>	<b>30.4</b>	636	30.6	643	30.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 200M

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Compiler Invocation (Continued)

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
 -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
 -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll2 -Ob0 -ansi-alias  
 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch  
 -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll2 -opt-prefetch -parallel  
 -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
 -parallel -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 24.3

PowerEdge R300 (Intel Xeon X5460, 3.16 GHz)

SPECfp\_base2006 = 23.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 22:41:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 February 2009.