



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3


Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

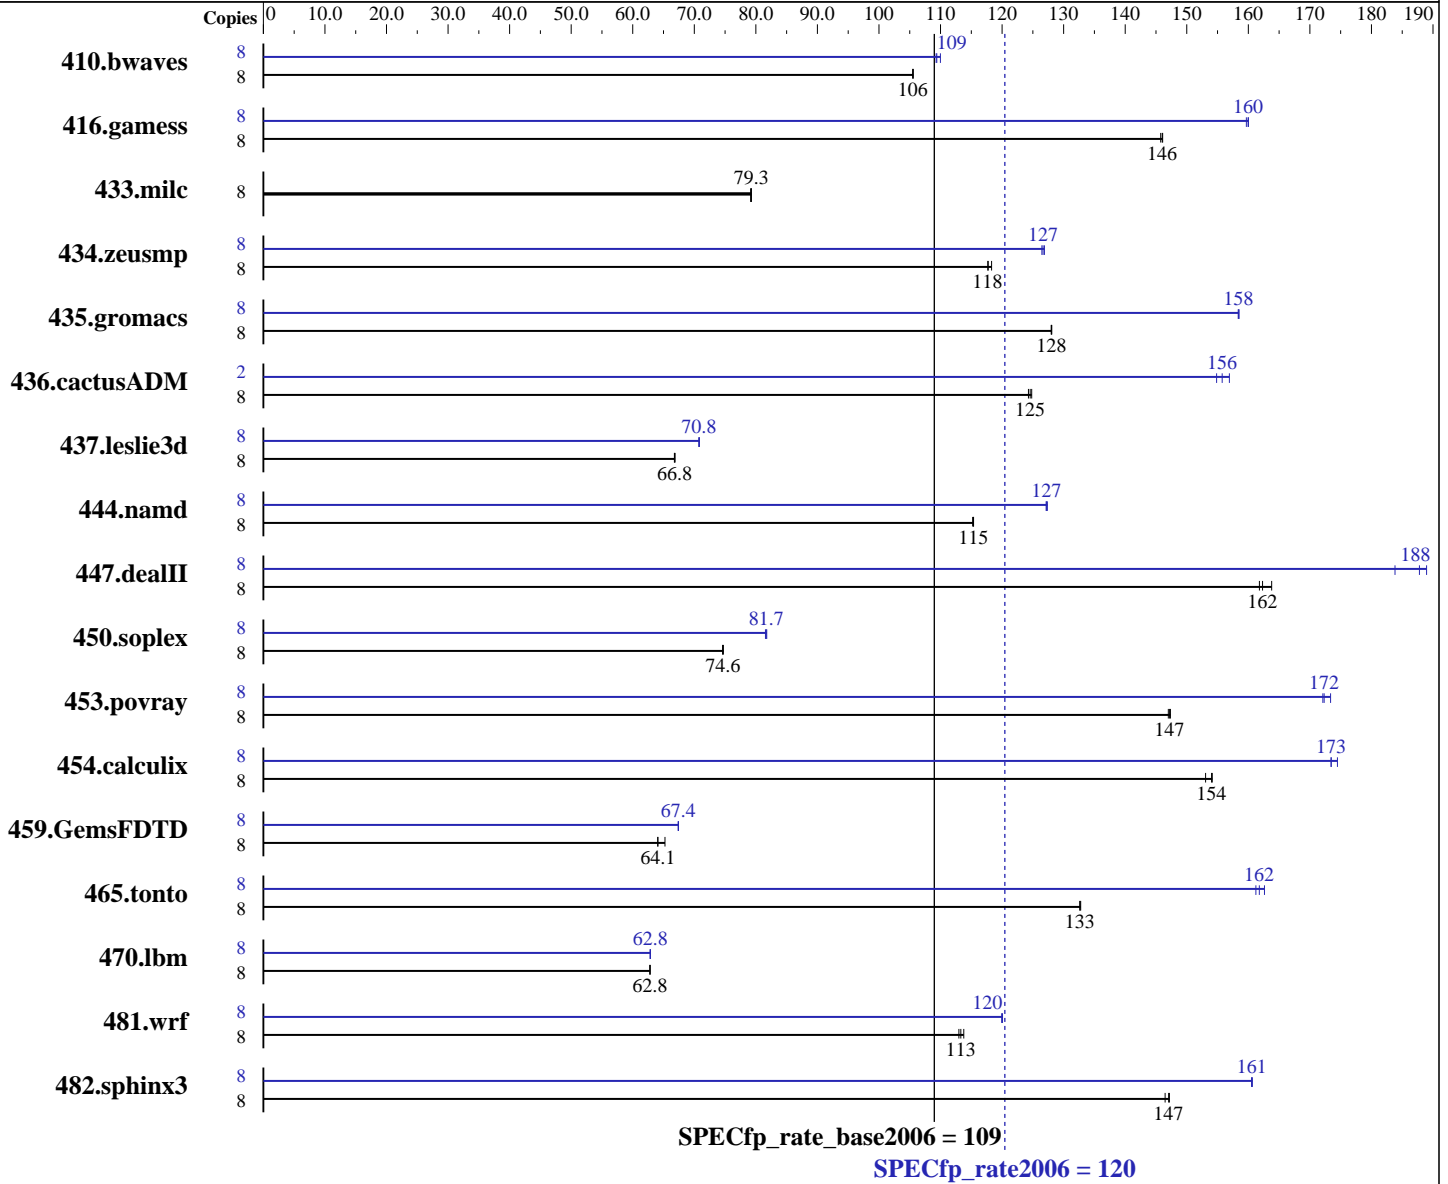

Hardware

CPU Name: AMD Opteron 2389
 CPU Characteristics: 2900
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-123.el5
 Compiler: PGI Server Complete Version 8.0
 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x148 GB 10 K SAS
Other Hardware: None

Other Software: binutils-2.17.50.0.6-9.e15
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1031	105	1030	106	1030	106	8	989	110	994	109	995	109
416.gamess	8	1075	146	1073	146	1072	146	8	979	160	979	160	981	160
433.milc	8	927	79.3	928	79.2	927	79.3	8	927	79.3	928	79.2	927	79.3
434.zeusmp	8	615	118	619	118	618	118	8	576	126	574	127	575	127
435.gromacs	8	446	128	446	128	446	128	8	361	158	360	158	361	158
436.cactusADM	8	767	125	766	125	769	124	2	153	156	152	157	154	155
437.leslie3d	8	1126	66.8	1124	66.9	1126	66.8	8	1063	70.7	1062	70.8	1063	70.8
444.namd	8	557	115	556	115	556	115	8	504	127	504	127	505	127
447.dealII	8	559	164	564	162	566	162	8	498	184	487	188	484	189
450.soplex	8	894	74.6	894	74.6	893	74.7	8	818	81.6	817	81.7	816	81.8
453.povray	8	289	147	289	147	290	147	8	245	173	247	172	247	172
454.calculix	8	428	154	428	154	431	153	8	380	173	381	173	378	174
459.GemsFDTD	8	1301	65.2	1324	64.1	1325	64.1	8	1259	67.4	1259	67.4	1259	67.4
465.tonto	8	593	133	594	133	593	133	8	484	163	488	161	487	162
470.lbm	8	1750	62.8	1751	62.8	1750	62.8	8	1749	62.9	1749	62.8	1749	62.8
481.wrf	8	789	113	791	113	785	114	8	745	120	745	120	744	120
482.sphinx3	8	1059	147	1060	147	1064	146	8	971	161	971	161	971	161

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2457600
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Mar-2009

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
NCPUS = "4"

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Base Optimization Flags

C benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Fortran benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Base Other Flags

C benchmarks:

`-Mipa=jobs:8`

C++ benchmarks:

`-Mipa=jobs:8`

Fortran benchmarks:

`-Mipa=jobs:8`

Benchmarks using both Fortran and C:

`-Mipa=jobs:8`

Peak Compiler Invocation

C benchmarks:

`pgcc`

C++ benchmarks (except as noted below):

`pathCC`

`444.namd: pgcpp`

Fortran benchmarks (except as noted below):

`pathf95`

`410.bwaves: pgf95`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -Mnomain

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -Mnomain

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -INLINE:aggressive=on -LNO:opt=0
-OPT:alias=disjoint -fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:8(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:8(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:8

434.zeusmp: -Mipa=jobs:8

437.leslie3d: -Mipa=jobs:8(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:8

454.calculix: -Mipa=jobs:8(pass 2)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 120

ProLiant BL465c G5
(2.9 GHz AMD Opteron 2389)

SPECfp_rate_base2006 = 109

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:57:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 April 2009.