



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 70.1

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate_base2006 = 64.2

CPU2006 license: 11


Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

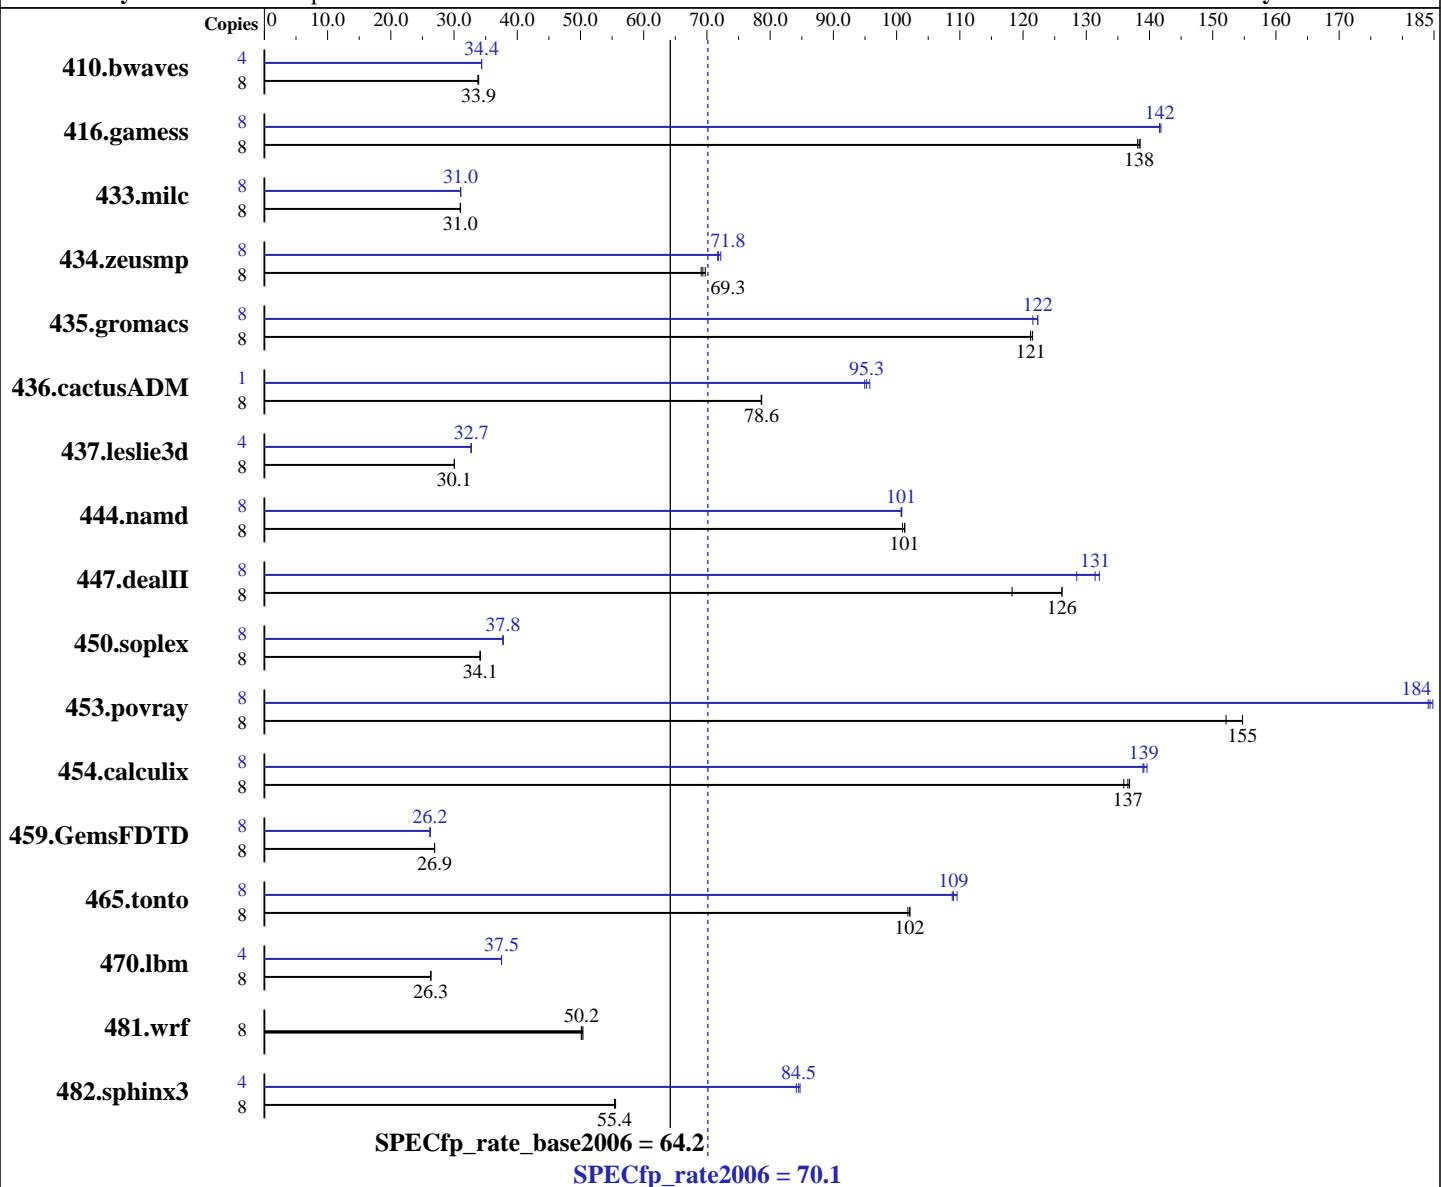

Hardware

CPU Name: Intel Xeon E5410
CPU Characteristics: 1333MHz system bus
CPU MHz: 2333
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate2006 = 70.1

SPECfp_rate_base2006 = 64.2

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4 x 4 GB PC2-5300F ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3220	33.8	<u>3210</u>	<u>33.9</u>	3208	33.9	4	<u>1582</u>	<u>34.4</u>	1583	34.4	1582	34.4
416.gamess	8	1131	139	1134	138	<u>1132</u>	<u>138</u>	8	1106	142	1105	142	<u>1106</u>	<u>142</u>
433.milc	8	2367	31.0	2371	31.0	<u>2368</u>	<u>31.0</u>	8	<u>2366</u>	<u>31.0</u>	2365	31.0	2366	31.0
434.zeusmp	8	<u>1050</u>	<u>69.3</u>	1044	69.7	1054	69.1	8	1015	71.7	1008	72.2	<u>1013</u>	<u>71.8</u>
435.gromacs	8	<u>471</u>	<u>121</u>	470	122	471	121	8	470	122	467	122	<u>467</u>	<u>122</u>
436.cactusADM	8	<u>1216</u>	<u>78.6</u>	1217	78.6	1215	78.7	1	<u>125</u>	<u>95.3</u>	126	95.0	125	95.8
437.leslie3d	8	2501	30.1	2504	30.0	<u>2502</u>	<u>30.1</u>	4	1151	32.7	<u>1149</u>	<u>32.7</u>	1148	32.7
444.namd	8	636	101	<u>634</u>	<u>101</u>	633	101	8	<u>637</u>	<u>101</u>	637	101	636	101
447.dealII	8	<u>726</u>	<u>126</u>	774	118	725	126	8	693	132	712	128	<u>697</u>	<u>131</u>
450.soplex	8	1956	34.1	<u>1954</u>	<u>34.1</u>	1953	34.2	8	1768	37.7	<u>1767</u>	<u>37.8</u>	1766	37.8
453.povray	8	280	152	275	155	<u>275</u>	<u>155</u>	8	230	185	231	184	<u>231</u>	<u>184</u>
454.calculix	8	486	136	<u>483</u>	<u>137</u>	482	137	8	<u>474</u>	<u>139</u>	475	139	473	140
459.GemsFDTD	8	3153	26.9	<u>3153</u>	<u>26.9</u>	3154	26.9	8	3238	26.2	<u>3238</u>	<u>26.2</u>	3237	26.2
465.tonto	8	<u>771</u>	<u>102</u>	771	102	773	102	8	<u>722</u>	<u>109</u>	724	109	718	110
470.lbm	8	<u>4176</u>	<u>26.3</u>	4175	26.3	4177	26.3	4	1465	37.5	<u>1465</u>	<u>37.5</u>	1466	37.5
481.wrf	8	1773	50.4	1783	50.1	<u>1780</u>	<u>50.2</u>	8	1773	50.4	1783	50.1	<u>1780</u>	<u>50.2</u>
482.sphinx3	8	<u>2814</u>	<u>55.4</u>	2815	55.4	2807	55.5	4	<u>920</u>	<u>84.7</u>	<u>923</u>	<u>84.5</u>	926	84.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 64M
 Hardware Prefetcher Enable and Adjacent Cache Line Prefetch Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate2006 = 70.1

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate2006 = 70.1

SPECfp_rate_base2006 = 64.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Oct-2008

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 70.1

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate_base2006 = 64.2

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

482.sphinx3: -xsse4.1 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll12 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll12 -Obo -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll12 -Obo -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll12 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5410)

SPECfp_rate2006 = 70.1

SPECfp_rate_base2006 = 64.2

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:09:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 August 2009.