



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 24.9**

**IBM BladeCenter HS22 (Intel Xeon E5504)**

**SPECfp\_base2006 = 23.5**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

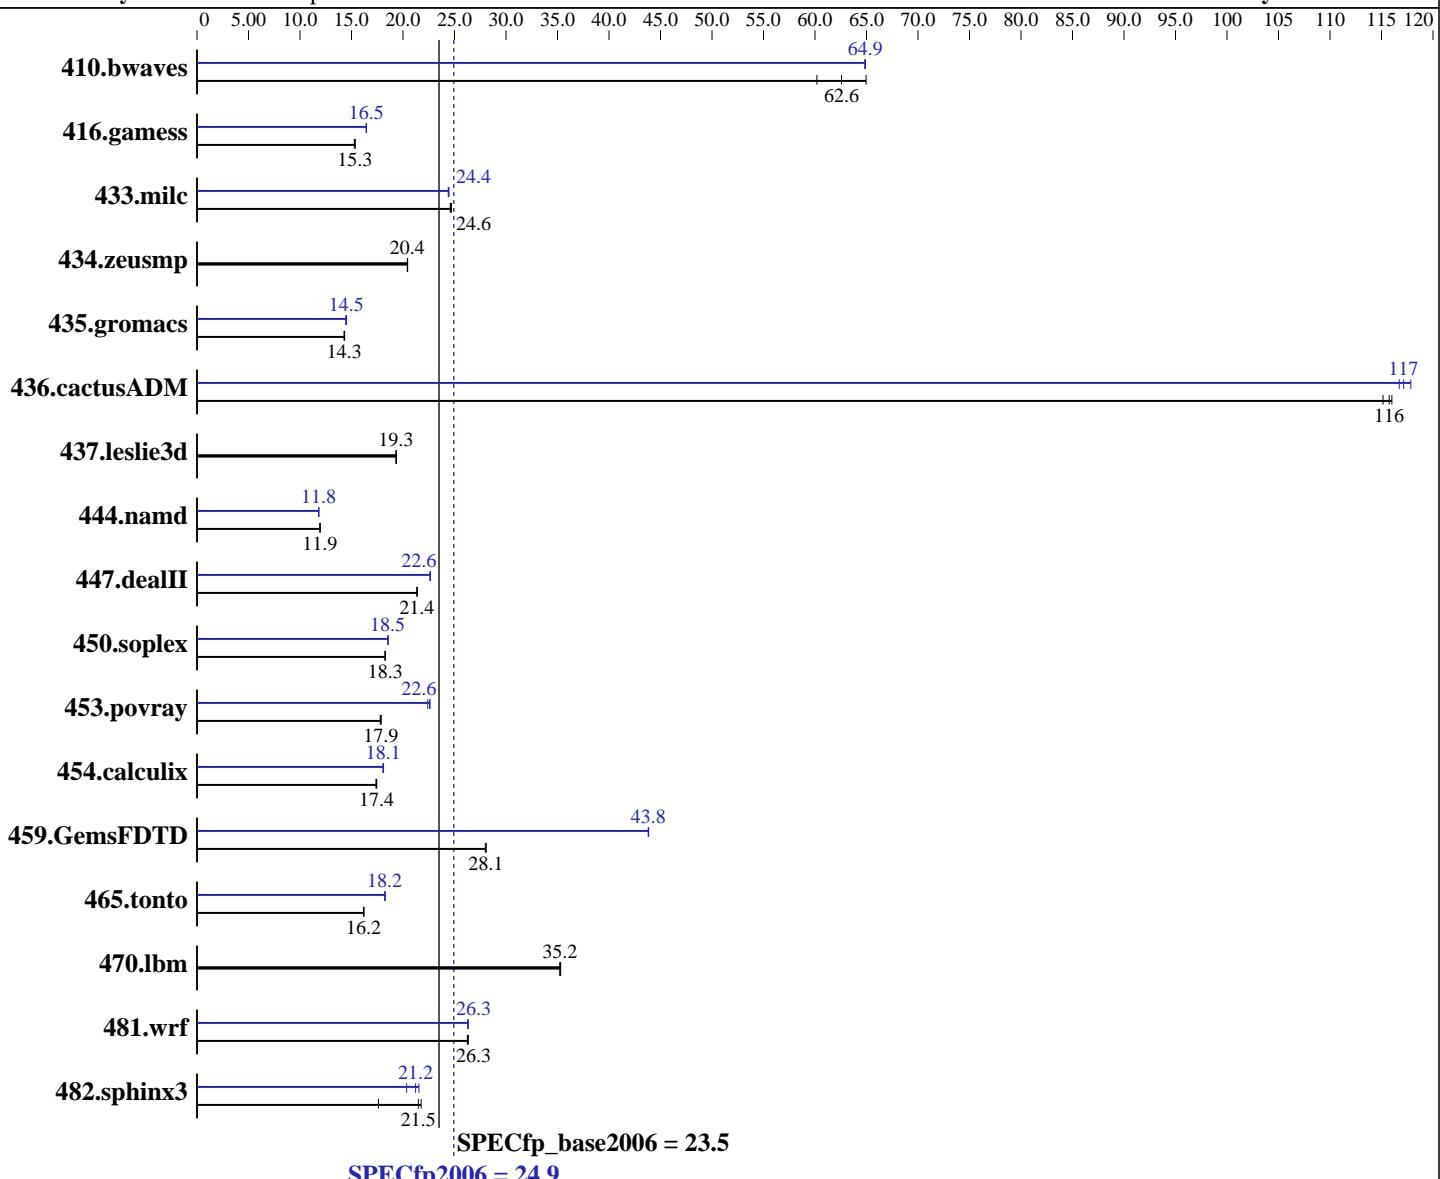

## Hardware

CPU Name: Intel Xeon E5504  
CPU Characteristics:  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64)  
SP2 with patch Linux kernel 20090119,  
Kernel 2.6.16.60-0.34-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux  
Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
l\_cprof\_p\_11.0.080  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 24.9**

### IBM BladeCenter HS22 (Intel Xeon E5504)

**SPECfp\_base2006 = 23.5**

**CPU2006 license:** 11

**Test date:** Jul-2009

**Test sponsor:** IBM Corporation

**Hardware Availability:** Apr-2009

**Tested by:** IBM Corporation

**Software Availability:** Feb-2009

L3 Cache:	4 MB I+D on chip per chip	Base Pointers:	64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 800 MHz)	Other Software:	Binutils 2.18.50.0.7.20080502
Disk Subsystem:	1 x 73 GB SAS, 10000 RPM		
Other Hardware:	None		

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>217</b>	<b>62.6</b>	226	60.2	209	65.0	210	64.8	209	64.9	<b>209</b>	<b>64.9</b>
416.gamess	1275	15.4	<b>1277</b>	<b>15.3</b>	1282	15.3	<b>1190</b>	<b>16.5</b>	1190	16.5	1193	16.4
433.milc	<b>373</b>	<b>24.6</b>	373	24.6	372	24.7	<b>375</b>	<b>24.5</b>	<b>376</b>	<b>24.4</b>	376	24.4
434.zeusmp	445	20.5	446	20.4	<b>445</b>	<b>20.4</b>	<b>445</b>	<b>20.5</b>	446	20.4	<b>445</b>	<b>20.4</b>
435.gromacs	<b>499</b>	<b>14.3</b>	498	14.3	500	14.3	492	14.5	<b>493</b>	<b>14.5</b>	494	14.4
436.cactusADM	104	115	<b>103</b>	<b>116</b>	103	116	<b>102</b>	<b>117</b>	<b>102</b>	<b>117</b>	101	118
437.leslie3d	486	19.4	<b>486</b>	<b>19.3</b>	486	19.3	486	19.4	<b>486</b>	<b>19.3</b>	486	19.3
444.namd	<b>671</b>	<b>11.9</b>	670	12.0	672	11.9	679	11.8	<b>678</b>	<b>11.8</b>	678	11.8
447.dealII	536	21.4	<b>535</b>	<b>21.4</b>	535	21.4	<b>505</b>	<b>22.6</b>	506	22.6	505	22.7
450.soplex	456	18.3	<b>456</b>	<b>18.3</b>	457	18.2	<b>449</b>	<b>18.6</b>	<b>450</b>	<b>18.5</b>	450	18.5
453.povray	<b>298</b>	<b>17.9</b>	299	17.8	298	17.9	238	22.4	235	22.6	<b>236</b>	<b>22.6</b>
454.calculix	475	17.4	<b>473</b>	<b>17.4</b>	473	17.4	<b>455</b>	<b>18.1</b>	<b>456</b>	<b>18.1</b>	457	18.1
459.GemsFDTD	379	28.0	<b>378</b>	<b>28.1</b>	378	28.1	<b>242</b>	<b>43.8</b>	242	43.8	242	43.9
465.tonto	608	16.2	608	16.2	<b>608</b>	<b>16.2</b>	538	18.3	<b>540</b>	<b>18.2</b>	540	18.2
470.lbm	<b>390</b>	<b>35.2</b>	389	35.3	390	35.2	<b>390</b>	<b>35.2</b>	389	35.3	390	35.2
481.wrf	424	26.3	<b>424</b>	<b>26.3</b>	426	26.3	<b>425</b>	<b>26.3</b>	<b>425</b>	<b>26.3</b>	424	26.3
482.sphinx3	<b>907</b>	<b>21.5</b>	1106	17.6	896	21.8	<b>905</b>	<b>21.5</b>	<b>918</b>	<b>21.2</b>	958	20.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M  
 Processor CPU C-States Enabled

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 24.9**

IBM BladeCenter HS22 (Intel Xeon E5504)

**SPECfp\_base2006 = 23.5**

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 24.9**

IBM BladeCenter HS22 (Intel Xeon E5504)

**SPECfp\_base2006 = 23.5**

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>IBM Corporation</b>	<b>SPECfp2006 =</b>	<b>24.9</b>
<b>IBM BladeCenter HS22 (Intel Xeon E5504)</b>	<b>SPECfp_base2006 =</b>	<b>23.5</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Jul-2009
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Apr-2009
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Feb-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -ansi-alias -scalar-rep -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -Ob0 -ansi-alias -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll14 -auto

```

Benchmarks using both Fortran and C:

```

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -opt-prefetch -parallel -auto-ilp32

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 24.9**

IBM BladeCenter HS22 (Intel Xeon E5504)

**SPECfp\_base2006 = 23.5**

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090818.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090818.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:38:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 August 2009.