



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECint®\_rate2006 = 339

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

### SPECint\_rate\_base2006 = 317

CPU2006 license: 001176


Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

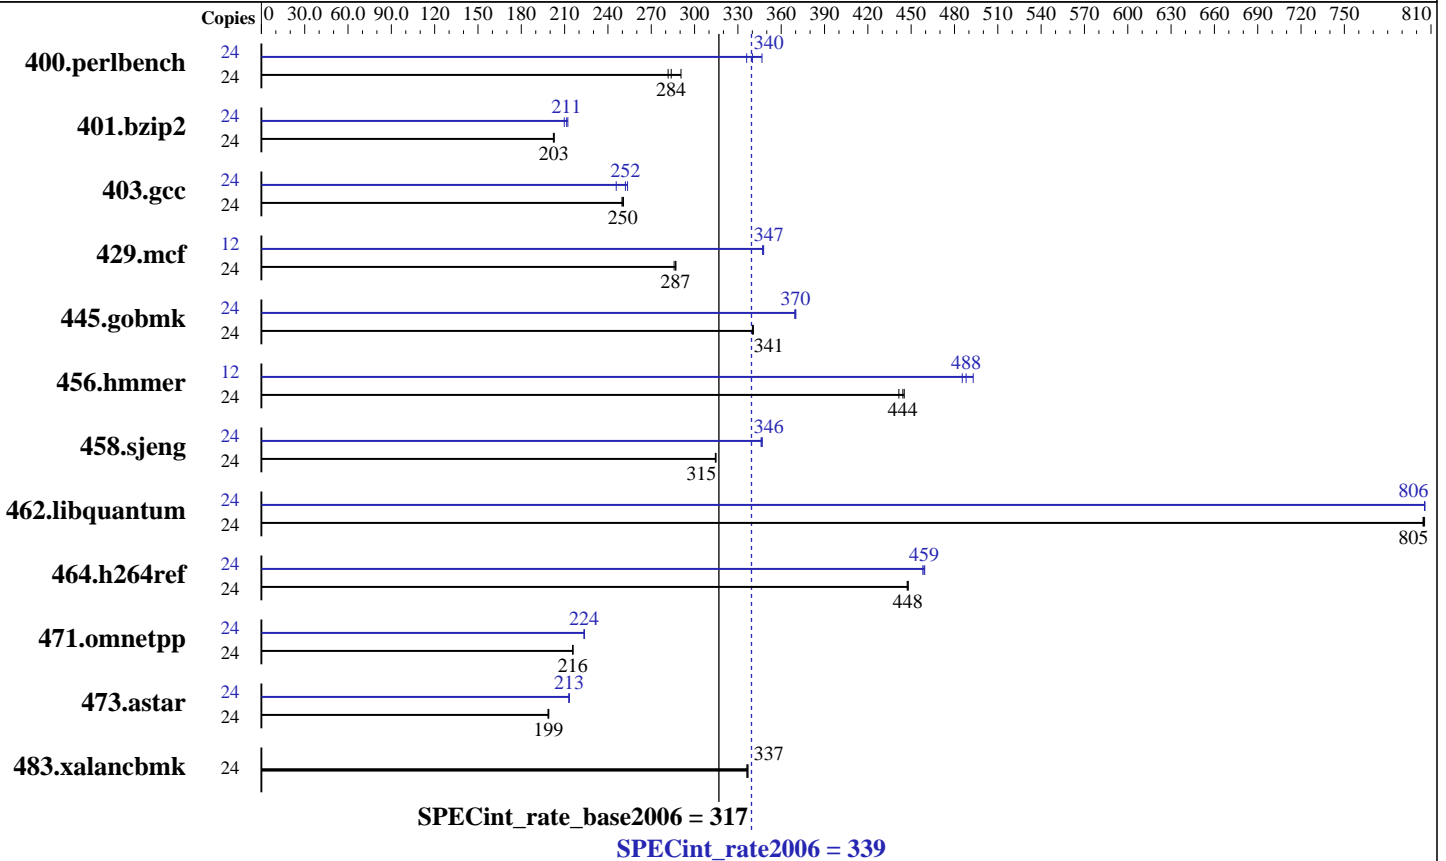

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 320 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint\_rate2006 = 339

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_rate\_base2006 = 317

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	807	291	<b>826</b>	<b>284</b>	832	282	24	698	336	<b>689</b>	<b>340</b>	676	347
401.bzip2	24	1145	202	1142	203	<b>1143</b>	<b>203</b>	24	1091	212	<b>1096</b>	<b>211</b>	1104	210
403.gcc	24	774	250	<b>772</b>	<b>250</b>	770	251	24	786	246	<b>766</b>	<b>252</b>	762	254
429.mcf	24	766	286	763	287	<b>763</b>	<b>287</b>	12	<b>315</b>	<b>347</b>	315	348	315	347
445.gobmk	24	740	340	<b>739</b>	<b>341</b>	739	341	24	<b>680</b>	<b>370</b>	682	369	680	370
456.hammer	24	507	441	503	445	<b>504</b>	<b>444</b>	12	<b>229</b>	<b>488</b>	231	485	227	493
458.sjeng	24	<b>923</b>	<b>315</b>	923	315	924	314	24	<b>838</b>	<b>346</b>	837	347	839	346
462.libquantum	24	<b>618</b>	<b>805</b>	618	805	617	806	24	617	806	<b>617</b>	<b>806</b>	617	806
464.h264ref	24	1186	448	1188	447	<b>1187</b>	<b>448</b>	24	1156	459	<b>1157</b>	<b>459</b>	1159	458
471.omnetpp	24	695	216	696	216	<b>695</b>	<b>216</b>	24	<b>671</b>	<b>224</b>	670	224	671	223
473.astar	24	849	198	<b>847</b>	<b>199</b>	847	199	24	790	213	791	213	<b>791</b>	<b>213</b>
483.xalancbmk	24	493	336	<b>492</b>	<b>337</b>	491	337	24	493	336	<b>492</b>	<b>337</b>	491	337

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro  
PWS-665-PQ power supply, 2 SNK-P0017 heatsinks,  
and 1 SAN Ave92 9G0912G101  
2 Nidec UltraFlo T92T12MMA7-57 cooling fans.

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 339

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_rate\_base2006 = 317

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 339

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_rate\_base2006 = 317

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 339

Motherboard X8DTL-6 (Intel Xeon X5650, 2.66GHz)

SPECint\_rate\_base2006 = 317

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:07:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 May 2010.