SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon E5630)

SPECint®_rate2006 = 230

SPECint_rate_base2006 = 215

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

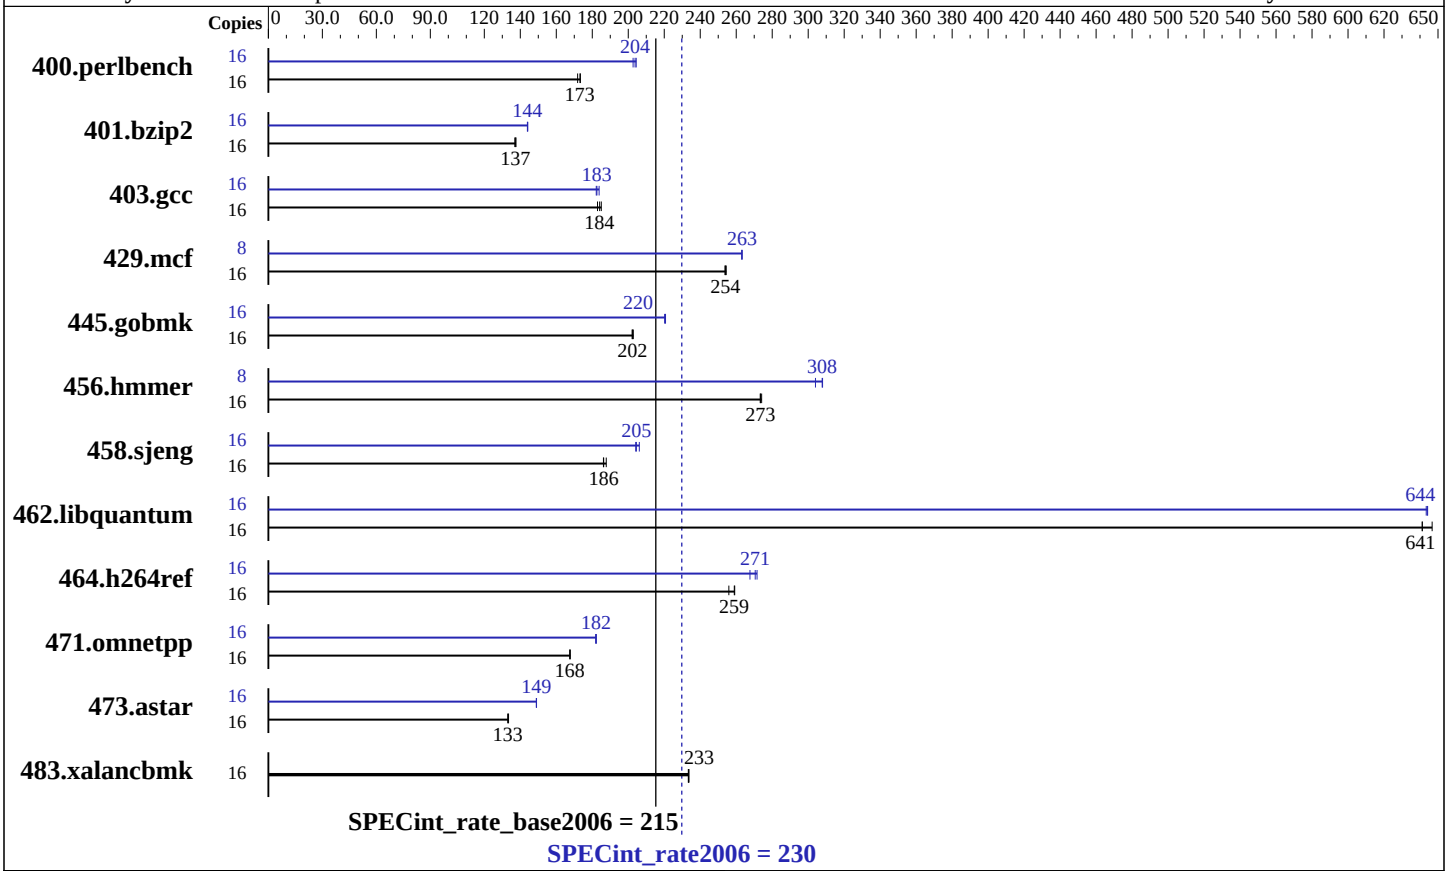

Hardware

CPU Name:	Intel Xeon E5630
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2533
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem:	1 x 73 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon E5630)

SPECint_rate2006 = 230

SPECint_rate_base2006 = 215

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	**903**	**173**	910	172	902	173	16	**767**	**204**	765	204	771	203
401.bzip2	16	**1124**	**137**	1122	138	1127	137	16	1071	144	1073	144	**1072**	**144**
403.gcc	16	696	185	704	183	**700**	**184**	16	701	184	707	182	**705**	**183**
429.mcf	16	573	254	**574**	**254**	575	254	8	277	263	**277**	**263**	277	263
445.gobmk	16	**829**	**202**	828	203	830	202	16	760	221	762	220	**761**	**220**
456.hmmer	16	545	274	**546**	**273**	546	273	8	245	304	242	308	**243**	**308**
458.sjeng	16	1040	186	**1039**	**186**	1031	188	16	939	206	**947**	**205**	948	204
462.libquantum	16	**517**	**641**	513	647	517	641	16	515	644	**515**	**644**	515	643
464.h264ref	16	1366	259	**1368**	**259**	1384	256	16	1304	272	**1309**	**271**	1323	268
471.omnetpp	16	596	168	**597**	**168**	597	168	16	**549**	**182**	549	182	550	182
473.astar	16	842	133	**844**	**133**	844	133	16	754	149	754	149	**754**	**149**
483.xalancbmk	16	**473**	**233**	473	233	472	234	16	**473**	**233**	473	233	472	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Platform Notes

```
 Turbo Mode Enable
 Turbo Boost set to Traditional
 CPU C State Enable
 Data Reuse Disable
```

General Notes

```
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

473.astar (continued):
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:18:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 June 2010.