



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp®2006 = 39.0

SPECfp_base2006 = 36.1

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

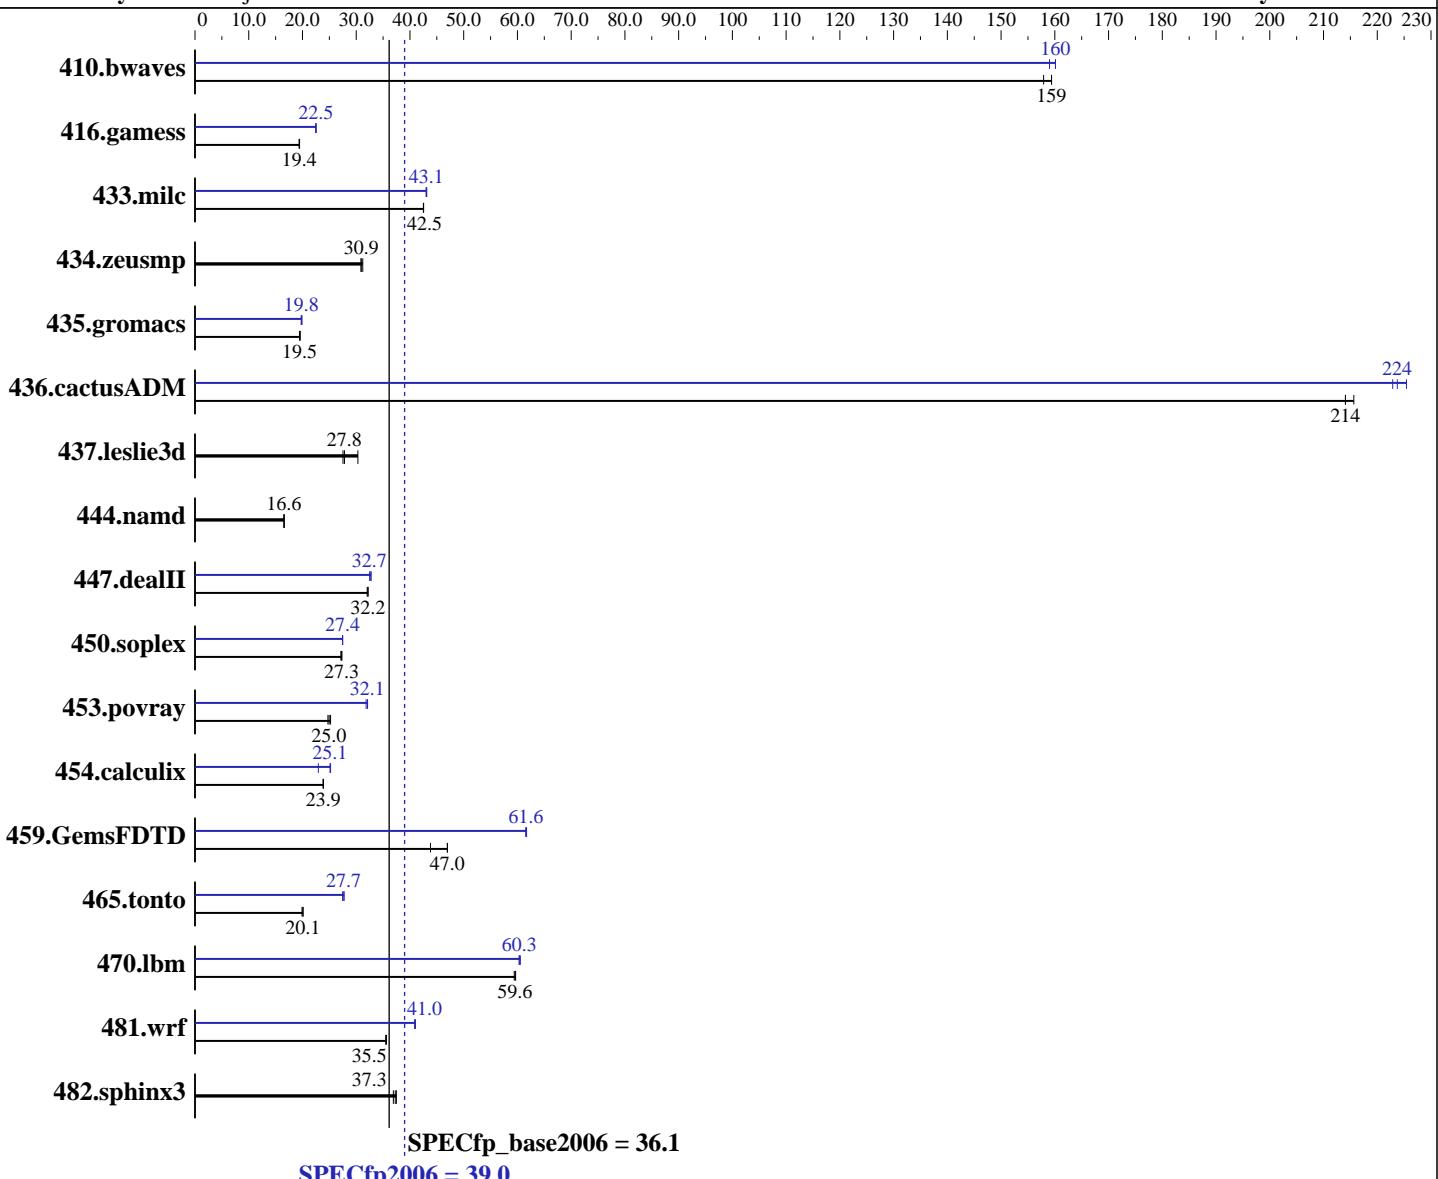

Hardware

CPU Name:	Intel Xeon L5640
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Multi-User Run Level 3

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp2006 = 39.0

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
 Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	86.1	158	85.3	159	<u>85.3</u>	<u>159</u>	<u>84.9</u>	<u>160</u>	85.5	159	84.9	160
416.gamess	1010	19.4	<u>1008</u>	<u>19.4</u>	1006	19.5	<u>869</u>	<u>22.5</u>	869	22.5	872	22.5
433.milc	<u>216</u>	<u>42.5</u>	216	42.5	216	42.5	<u>213</u>	<u>43.0</u>	213	43.1	<u>213</u>	<u>43.1</u>
434.zeusmp	<u>294</u>	<u>30.9</u>	291	31.2	294	30.9	<u>294</u>	<u>30.9</u>	291	31.2	294	30.9
435.gromacs	365	19.6	367	19.5	<u>366</u>	<u>19.5</u>	359	19.9	361	19.8	<u>360</u>	<u>19.8</u>
436.cactusADM	55.4	216	55.8	214	<u>55.8</u>	<u>214</u>	53.6	223	<u>53.4</u>	<u>224</u>	53.0	225
437.leslie3d	<u>338</u>	<u>27.8</u>	310	30.3	341	27.5	<u>338</u>	<u>27.8</u>	310	30.3	341	27.5
444.namd	484	16.6	484	16.6	<u>484</u>	<u>16.6</u>	484	16.6	484	16.6	<u>484</u>	<u>16.6</u>
447.dealII	357	32.0	<u>355</u>	<u>32.2</u>	355	32.2	<u>352</u>	<u>32.5</u>	349	32.8	<u>350</u>	<u>32.7</u>
450.soplex	307	27.1	305	27.3	<u>306</u>	<u>27.3</u>	304	27.4	303	27.5	<u>304</u>	<u>27.4</u>
453.povray	211	25.2	215	24.7	<u>213</u>	<u>25.0</u>	<u>166</u>	<u>32.1</u>	167	31.8	166	32.1
454.calculix	<u>346</u>	<u>23.9</u>	345	23.9	346	23.8	<u>359</u>	<u>23.0</u>	327	25.2	<u>328</u>	<u>25.1</u>
459.GemsFDTD	226	47.0	<u>226</u>	<u>47.0</u>	242	43.8	<u>172</u>	<u>61.6</u>	172	61.7	<u>172</u>	<u>61.6</u>
465.tonto	<u>490</u>	<u>20.1</u>	494	19.9	489	20.1	<u>355</u>	<u>27.7</u>	355	27.7	358	27.5
470.lbm	<u>231</u>	<u>59.6</u>	231	59.4	230	59.7	<u>228</u>	<u>60.3</u>	<u>228</u>	<u>60.3</u>	227	60.5
481.wrf	313	35.6	315	35.5	<u>314</u>	<u>35.5</u>	272	41.0	273	40.9	<u>272</u>	<u>41.0</u>
482.sphinx3	520	37.5	528	36.9	<u>523</u>	<u>37.3</u>	<u>520</u>	<u>37.5</u>	528	36.9	<u>523</u>	<u>37.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1067 MHz.

BIOS configuration:

Data Reuse Optimization = Disable

Performance/Power Setting = Traditional



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp2006 = 39.0

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

General Notes

OMP_NUM_THREADS set to number of cores

KMP_AFFINITY set to granularity=fine,scatter

KMP_STACKSIZE set to 200M

For information about Fujitsu please visit: <http://www.fujitsu.com>

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp2006 = 39.0

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

SPECfp_base2006 = 36.1

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp2006 = 39.0

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

444.namd: basepeak = yes

```
447.dealII: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias -scalar-rep -auto-ilp32
```

```
450.soplex: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3 -auto-ilp32
```

```
453.povray: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel
```

```
416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll2 -Ob0 -opt-prefetch -parallel
```

```
465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -inline-calloc -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                  -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                  -unroll2 -opt-prefetch -parallel -auto-ilp32
```

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon L5640, 2.27 GHz

SPECfp2006 = 39.0

SPECfp_base2006 = 36.1

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:16:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2010.