



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

### SPECfp<sup>®</sup>\_rate2006 = 236

### Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

### SPECfp\_rate\_base2006 = 226

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

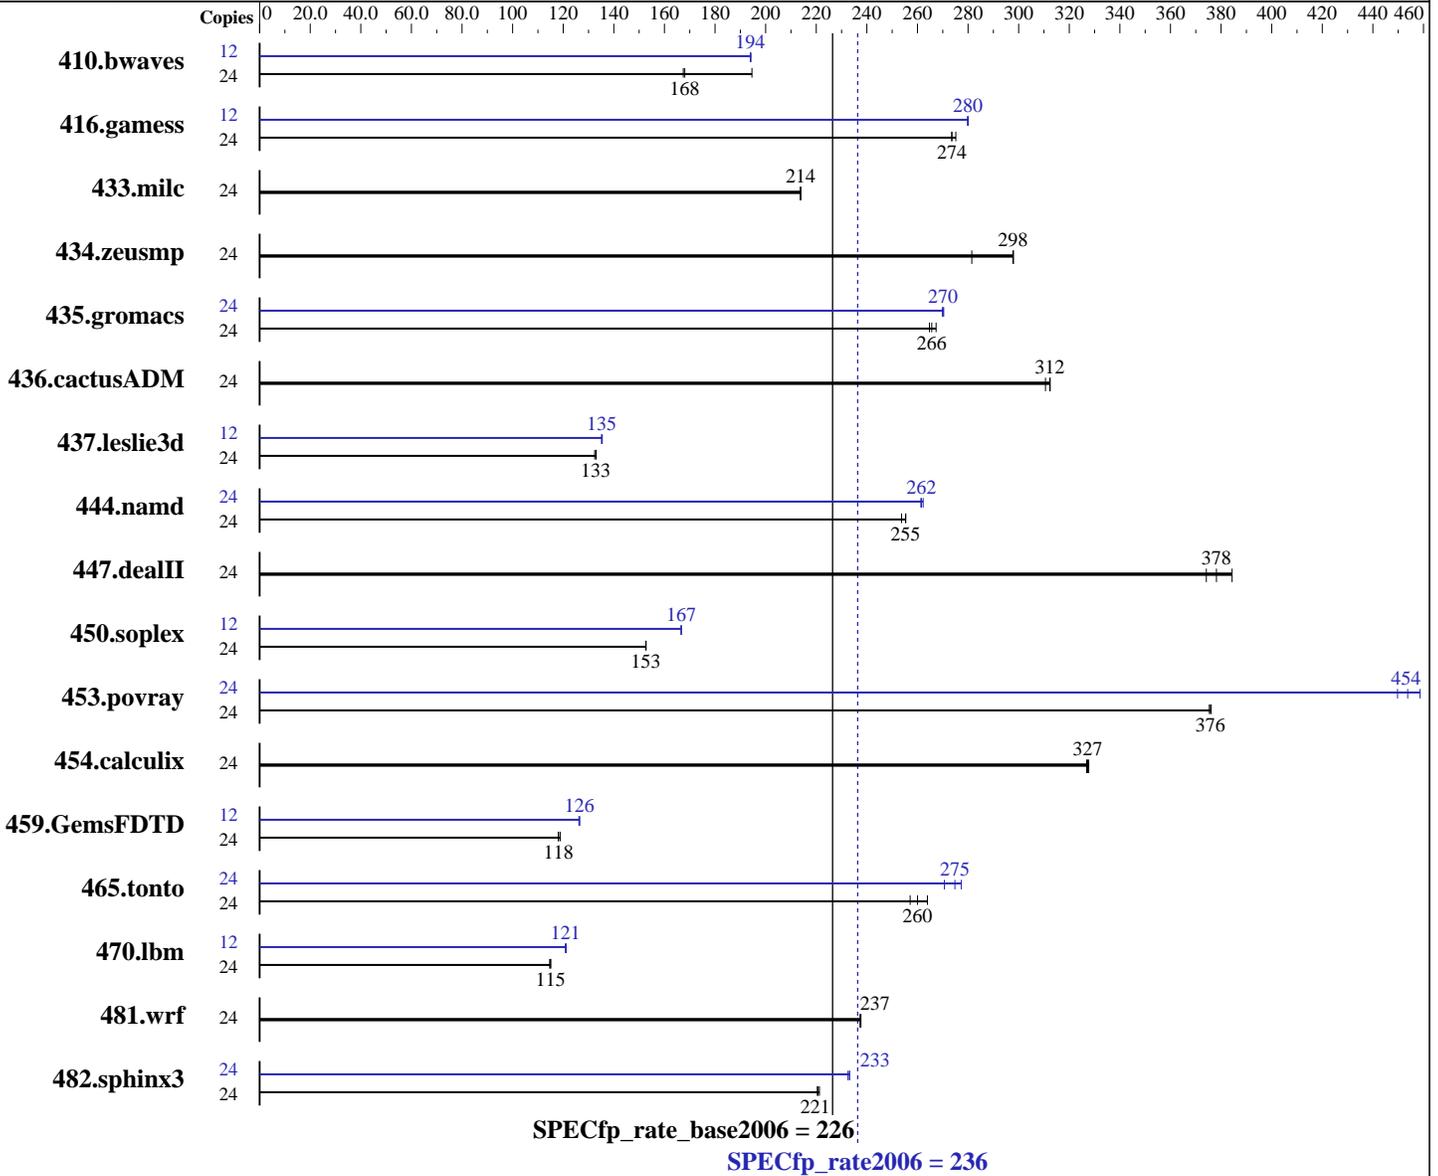

#### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Oracle Enterprise Linux Server release 5.4 kernel 2.6.18-164.el5  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

SPECfp\_rate2006 = **236**

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECfp\_rate\_base2006 = **226**

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB DDR3-1333 CL9, 2 Rank, ECC)  
Disk Subsystem: 1 x 1 TB, SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1676	195	<u>1941</u>	<u>168</u>	1948	167	12	<u>841</u>	<u>194</u>	840	194	841	194
416.gamess	24	1708	275	1718	274	<u>1717</u>	<u>274</u>	12	840	280	<u>839</u>	<u>280</u>	839	280
433.milc	24	1031	214	<u>1030</u>	<u>214</u>	1030	214	24	1031	214	<u>1030</u>	<u>214</u>	1030	214
434.zeusmp	24	<u>734</u>	<u>298</u>	776	281	733	298	24	<u>734</u>	<u>298</u>	776	281	733	298
435.gromacs	24	641	267	<u>645</u>	<u>266</u>	647	265	24	634	270	<u>634</u>	<u>270</u>	635	270
436.cactusADM	24	923	311	918	312	<u>918</u>	<u>312</u>	24	923	311	918	312	<u>918</u>	<u>312</u>
437.leslie3d	24	1696	133	<u>1697</u>	<u>133</u>	1703	132	12	833	135	<u>834</u>	<u>135</u>	834	135
444.namd	24	759	254	754	255	<u>754</u>	<u>255</u>	24	734	262	737	261	<u>736</u>	<u>262</u>
447.dealII	24	<u>726</u>	<u>378</u>	714	384	734	374	24	<u>726</u>	<u>378</u>	714	384	734	374
450.soplex	24	1310	153	1311	153	<u>1311</u>	<u>153</u>	12	<u>601</u>	<u>167</u>	601	167	600	167
453.povray	24	340	376	<u>340</u>	<u>376</u>	340	375	24	284	450	<u>281</u>	<u>454</u>	278	459
454.calculix	24	606	327	<u>605</u>	<u>327</u>	604	328	24	606	327	<u>605</u>	<u>327</u>	604	328
459.GemsFDTD	24	2142	119	2157	118	<u>2155</u>	<u>118</u>	12	1007	126	<u>1007</u>	<u>126</u>	1009	126
465.tonto	24	<u>908</u>	<u>260</u>	919	257	895	264	24	873	271	<u>859</u>	<u>275</u>	852	277
470.lbm	24	<u>2868</u>	<u>115</u>	2876	115	2866	115	12	1361	121	<u>1364</u>	<u>121</u>	1364	121
481.wrf	24	<u>1129</u>	<u>237</u>	1130	237	1128	238	24	<u>1129</u>	<u>237</u>	1130	237	1128	238
482.sphinx3	24	2114	221	<u>2119</u>	<u>221</u>	2122	220	24	<u>2006</u>	<u>233</u>	2011	233	2006	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Default BIOS settings used



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 236

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECfp\_rate\_base2006 = 226

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 236

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECfp\_rate\_base2006 = 226

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 236

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECfp\_rate\_base2006 = 226

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 236

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECfp\_rate\_base2006 = 226

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:12:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2010.