



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test sponsor: IBM Corporation


Tested by: IBM Corporation

Test date:

Aug-2010

Hardware Availability: Sep-2010

Software Availability: Sep-2010

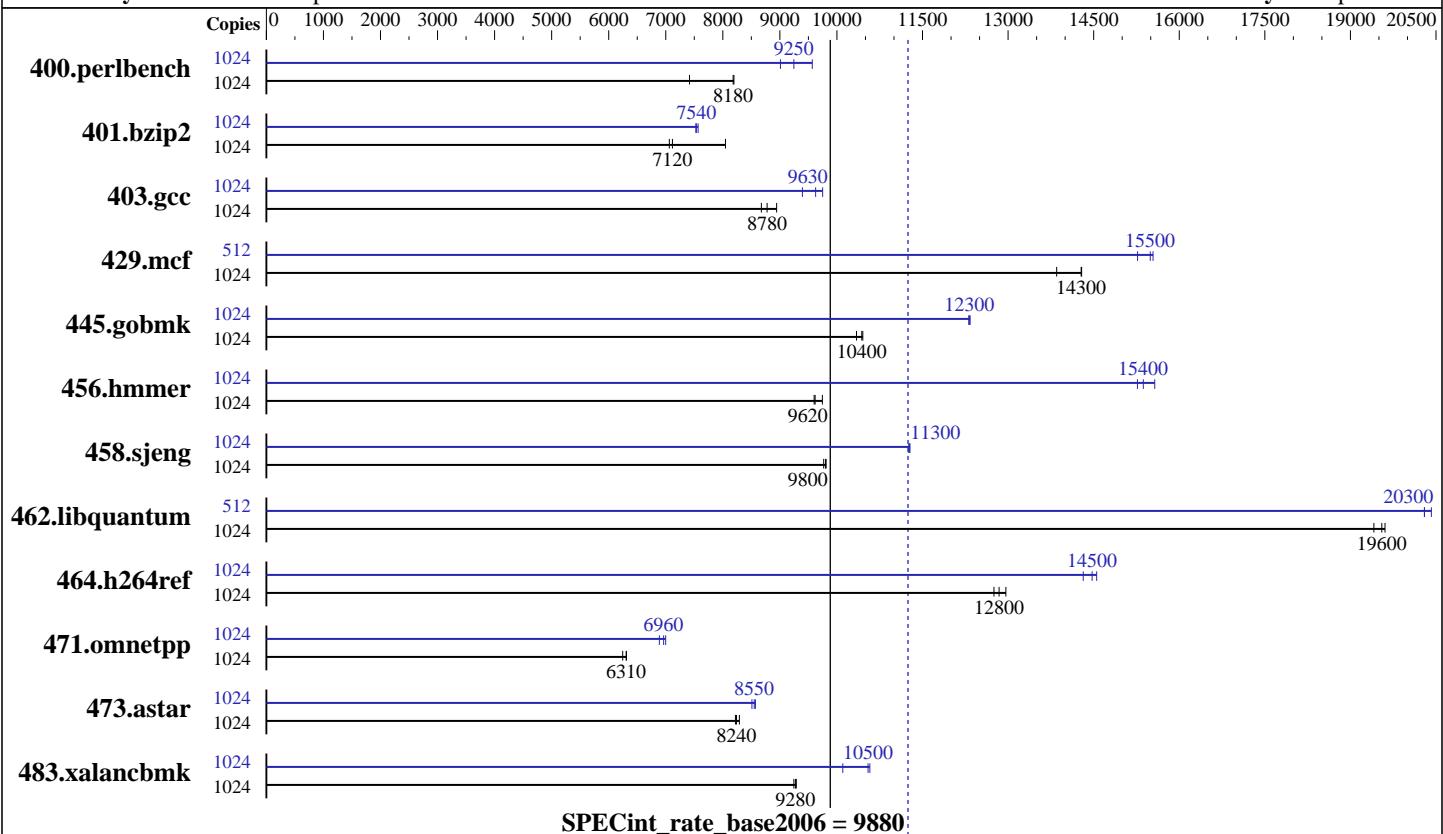

Hardware

CPU Name: POWER7
CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.14 GHz
CPU MHz: 4004
FPU: Integrated
CPU(s) enabled: 256 cores, 32 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable: 32,64,96,128,160,192,224,256 cores
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 2 TB (256x8 GB) DDR3 1066 MHz
Disk Subsystem: 42x146.8 GB Raid0 SAS SFF 15K RPM
Other Hardware: None

Software

Operating System: IBM AIX V7.1
Compiler: IBM XL C/C++ for AIX, V11.1
Version: 11.01.0000.0002
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1024	1349	7420	1223	8180	1221	8190	1024	1110	9010	1082	9250	1046	9570
401.bzip2	1024	1228	8050	1399	7060	1388	7120	1024	1306	7570	1313	7530	1311	7540
403.gcc	1024	950	8680	939	8780	922	8940	1024	856	9630	845	9750	877	9400
429.mcf	1024	654	14300	654	14300	674	13900	512	306	15300	300	15500	301	15500
445.gobmk	1024	1029	10400	1039	10300	1028	10500	1024	873	12300	871	12300	872	12300
456.hammer	1024	993	9620	980	9750	995	9600	1024	626	15300	622	15400	614	15600
458.sjeng	1024	1268	9770	1264	9800	1263	9810	1024	1099	11300	1100	11300	1098	11300
462.libquantum	1024	1093	19400	1082	19600	1085	19600	512	520	20400	523	20300	523	20300
464.h264ref	1024	1777	12800	1765	12800	1748	13000	1024	1583	14300	1557	14600	1566	14500
471.omnetpp	1024	1014	6310	1015	6310	1025	6250	1024	929	6890	914	7000	919	6960
473.astar	1024	874	8220	867	8290	872	8240	1024	839	8570	845	8510	841	8550
483.xalancbmk	1024	762	9280	761	9290	764	9250	1024	699	10100	668	10600	670	10500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```
fdpr binary optimization tool used for 401.bzip2
with options -04 -sdp 9 -rtb -vrox -nodp -m power7
fdpr binary optimization tool used for 403.gcc 429.mcf 445.gobmk 458.sjeng
with options -03 -m power7
fdpr binary optimization tool used for 456.hammer
with options -03 -lu -1 -nodp -sdp 9 -m power7
fdpr binary optimization tool used for 462.libquantum
with options -04 -nodp -m power7
fdpr binary optimization tool used for 471.omnetpp
with options -04 -nodp -m power7 -vrox
fdpr binary optimization tool used for 473.astar
with options -04 -sdp 9 -vrox -dp -m power7
```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

Environment variables set by runspec before the start of the run:
 MALLOCOPTIONS = "pool"
 MEMORY_AFFINITY = "MCM"
 XLF RTEOPTS = "intrinthds=1"

All ulimits set to unlimited.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Operating System Notes (Continued)

102400 16M large pages defined with vmo command

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage -qsimd -qvecnvol
-D_IIS_MACROS -qalias=noansi -qalloc -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -O5 -qlargepage -D_IIS_MACROS
-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Compiler Invocation (Continued)

C++ benchmarks:

/usr/vacpp/bin/xlc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -D_ILS_MACROS
-qalias=noansi -blpdata -btextpsize:64K

401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -qalloca -blpdata -btextpsize:64K

429.mcf: Same as 401.bzip2

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

456.hmmr: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign
-D_ILS_MACROS -blpdata -btextpsize:64K

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -O5 -q64 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

```
471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural
             -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
             -blpdata -btexpsize:64K
```

```
473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qinlglue
             -qalign=natural -blpdata -btexpsize:64K
```

```
483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
                 -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qarch=pwr5
                 -qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue
                 -D__IBM_FAST_VECTOR -blpdata -btexpsize:64K
```

Peak Other Flags

C benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
400.perlbench: -qsuppress=1500-036
```

```
403.gcc: -qsuppress=1500-036
```

```
462.libquantum: -qsuppress=1500-036
```

C++ benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
471.omnetpp: -qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 11200

IBM Power 795 (4.0 GHz, 256 core)

SPECint_rate_base2006 = 9880

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:20:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.