



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 33.2**

**IBM System x3690 X5 (Intel Xeon E6540)**

**SPECfp\_base2006 = 31.0**

**CPU2006 license:** 11


**Test date:** Aug-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Aug-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

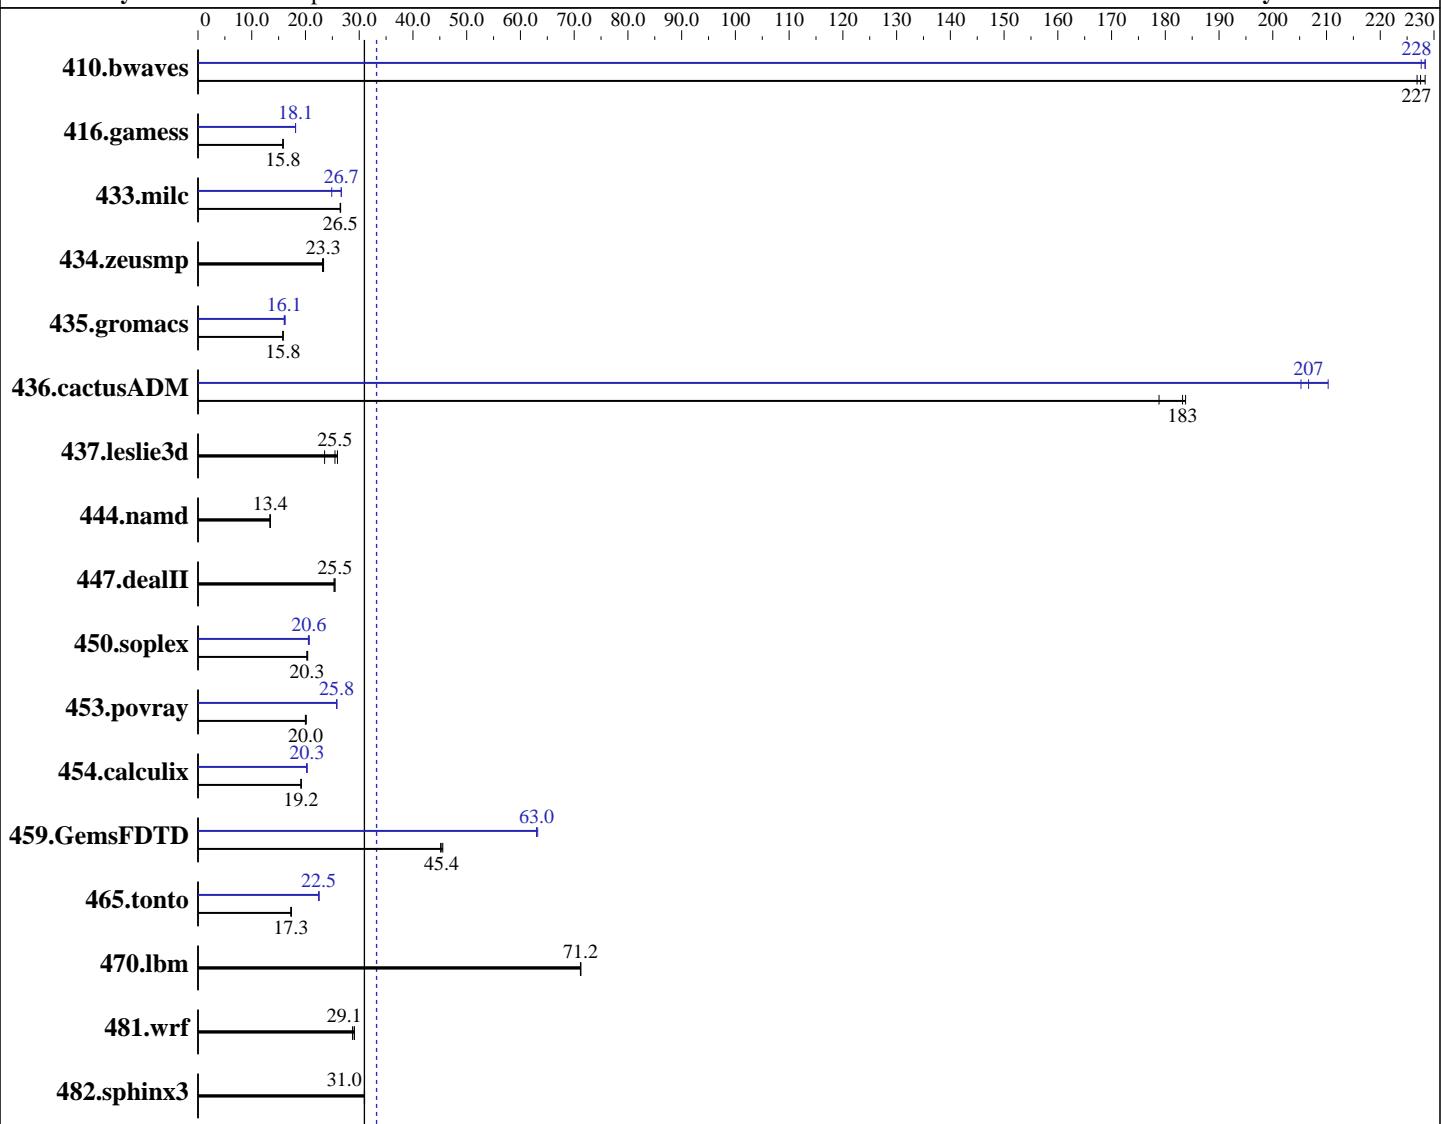

**Hardware**

CPU Name: Intel Xeon E6540  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

**Software**

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation		SPECfp2006 = 33.2	
IBM System x3690 X5 (Intel Xeon E6540)		SPECfp_base2006 = 31.0	
CPU2006 license:	11	Test date:	Aug-2010
Test sponsor:	IBM Corporation	Hardware Availability:	Aug-2010
Tested by:	IBM Corporation	Software Availability:	Jan-2010
L3 Cache:	18 MB I+D on chip per chip	Base Pointers:	64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	128 GB (32 x 4 GB PC3-8500R CL7, Quad Rank)	Other Software:	None
Disk Subsystem:	1 x 146 GB SAS, 15000 RPM		
Other Hardware:	None		

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	59.9	227	59.5	228	<b>59.7</b>	<b>227</b>	59.5	228	59.7	228	<b>59.5</b>	<b>228</b>
416.gamess	1234	15.9	1242	15.8	<b>1236</b>	<b>15.8</b>	1078	18.2	<b>1079</b>	<b>18.1</b>	1079	18.1
433.milc	347	26.5	346	26.5	<b>347</b>	<b>26.5</b>	344	26.7	<b>344</b>	<b>26.7</b>	369	24.9
434.zeusmp	393	23.2	<b>390</b>	<b>23.3</b>	389	23.4	393	23.2	<b>390</b>	<b>23.3</b>	389	23.4
435.gromacs	<b>451</b>	<b>15.8</b>	451	15.8	453	15.8	440	16.2	<b>444</b>	<b>16.1</b>	445	16.0
436.cactusADM	65.0	184	66.8	179	<b>65.2</b>	<b>183</b>	56.8	210	<b>57.8</b>	<b>207</b>	58.2	205
437.leslie3d	399	23.6	<b>369</b>	<b>25.5</b>	362	26.0	399	23.6	<b>369</b>	<b>25.5</b>	362	26.0
444.namd	<b>596</b>	<b>13.4</b>	599	13.4	596	13.5	<b>596</b>	<b>13.4</b>	599	13.4	596	13.5
447.dealII	452	25.3	449	25.5	<b>449</b>	<b>25.5</b>	452	25.3	449	25.5	<b>449</b>	<b>25.5</b>
450.soplex	<b>411</b>	<b>20.3</b>	411	20.3	408	20.4	<b>403</b>	<b>20.7</b>	406	20.5	<b>404</b>	<b>20.6</b>
453.povray	264	20.2	<b>266</b>	<b>20.0</b>	266	20.0	206	25.8	206	25.8	<b>206</b>	<b>25.8</b>
454.calculix	<b>430</b>	<b>19.2</b>	431	19.1	429	19.2	<b>407</b>	<b>20.3</b>	407	20.3	408	20.2
459.GemsFDTD	<b>234</b>	<b>45.4</b>	235	45.1	233	45.6	<b>168</b>	<b>63.0</b>	168	<b>63.2</b>	<b>168</b>	<b>63.0</b>
465.tonto	<b>568</b>	<b>17.3</b>	566	17.4	570	17.3	<b>437</b>	<b>22.5</b>	<b>438</b>	<b>22.5</b>	438	22.5
470.lbm	193	71.2	193	71.2	<b>193</b>	<b>71.2</b>	193	71.2	193	71.2	<b>193</b>	<b>71.2</b>
481.wrf	<b>384</b>	<b>29.1</b>	389	28.7	384	29.1	<b>384</b>	<b>29.1</b>	389	28.7	384	29.1
482.sphinx3	<b>629</b>	<b>31.0</b>	629	31.0	630	31.0	<b>629</b>	<b>31.0</b>	629	31.0	630	31.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

## Platform Notes

Turbo Boost set to Traditional

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 33.2**

IBM System x3690 X5 (Intel Xeon E6540)

**SPECfp\_base2006 = 31.0**

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 33.2**

IBM System x3690 X5 (Intel Xeon E6540)

**SPECfp\_base2006 = 31.0**

CPU2006 license: 11

**Test date:** Aug-2010

Test sponsor: IBM Corporation

**Hardware Availability:** Aug-2010

Tested by: IBM Corporation

**Software Availability:** Jan-2010

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 33.2**

IBM System x3690 X5 (Intel Xeon E6540)

**SPECfp\_base2006 = 31.0**

CPU2006 license: 11

**Test date:** Aug-2010

Test sponsor: IBM Corporation

**Hardware Availability:** Aug-2010

Tested by: IBM Corporation

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:57:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 September 2010.