



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = 43.8

PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_base2006 = 40.9

CPU2006 license: 19


Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

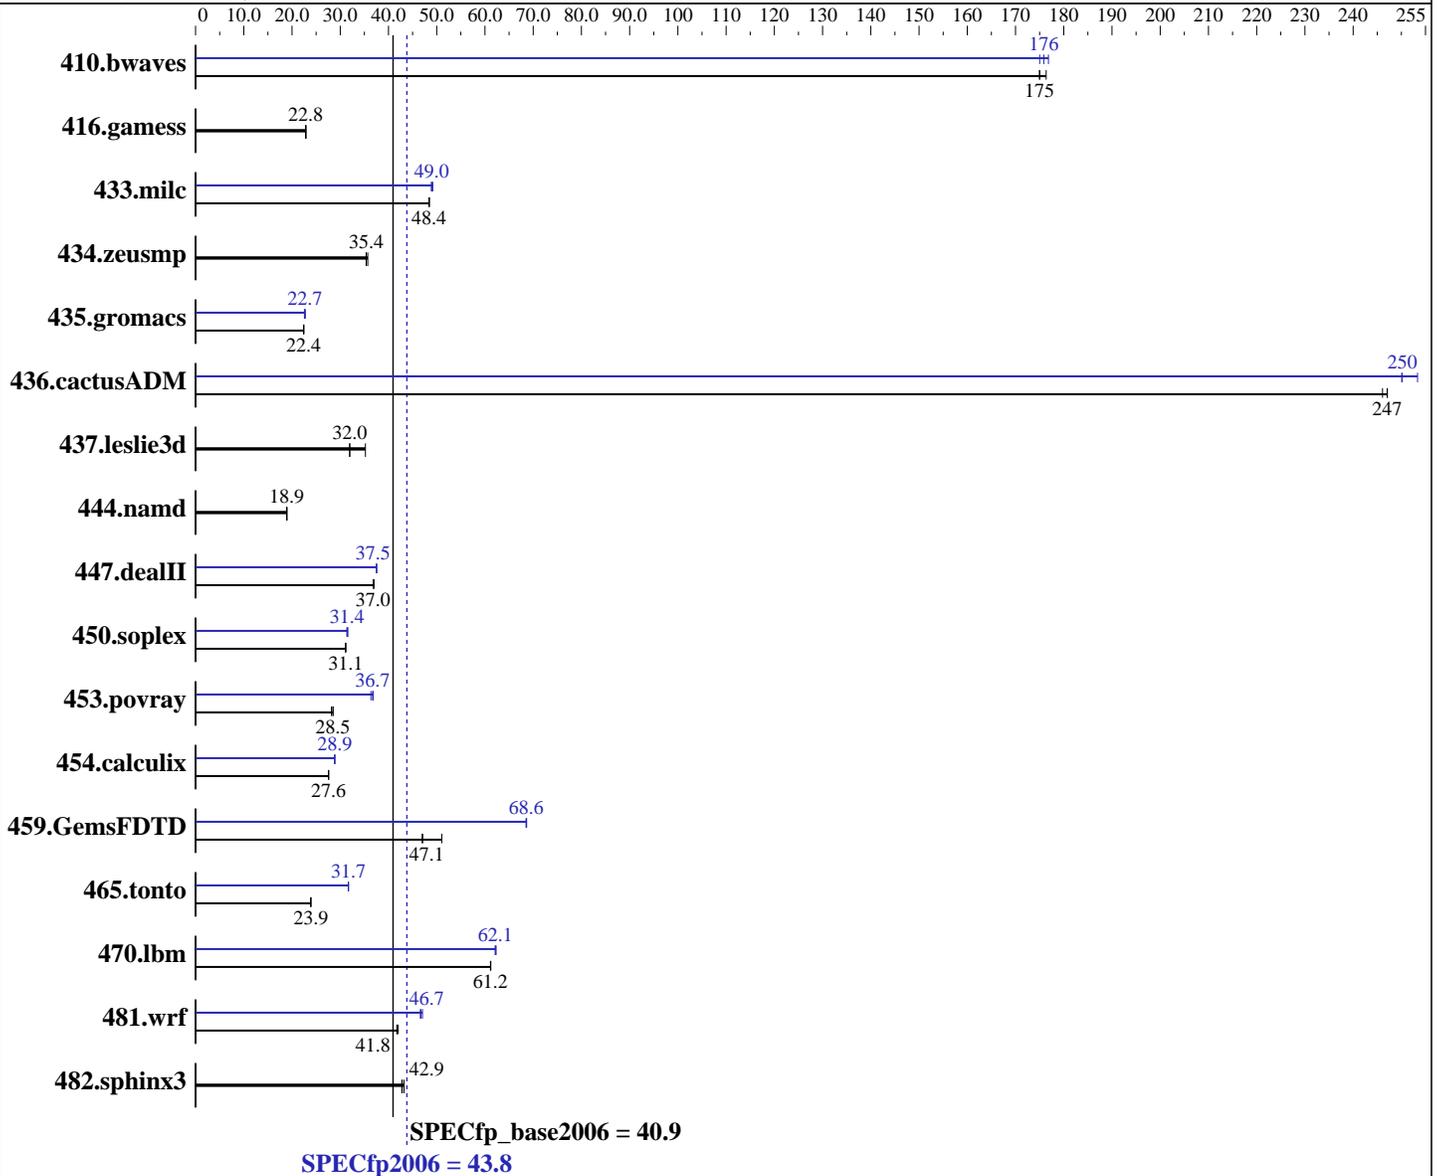

### Hardware

CPU Name: Intel Xeon X5660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **43.8**

PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_base2006 = **40.9**

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12x8 GB PC3L-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SAS, 73 GB, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>77.7</u>	<u>175</u>	77.7	175	77.1	176	<u>77.3</u>	<u>176</u>	77.7	175	76.9	177
416.gamess	<b>858</b>	<b>22.8</b>	858	22.8	854	22.9	<b>858</b>	<b>22.8</b>	858	22.8	854	22.9
433.milc	190	48.4	189	48.5	<b>190</b>	<b>48.4</b>	188	48.9	<b>187</b>	<b>49.0</b>	187	49.2
434.zeusmp	257	35.4	<b>257</b>	<b>35.4</b>	255	35.7	257	35.4	<b>257</b>	<b>35.4</b>	255	35.7
435.gromacs	319	22.4	318	22.5	<b>319</b>	<b>22.4</b>	314	22.7	316	22.6	<b>314</b>	<b>22.7</b>
436.cactusADM	48.6	246	<b>48.4</b>	<b>247</b>	48.4	247	47.2	253	<b>47.8</b>	<b>250</b>	47.8	250
437.leslie3d	294	31.9	267	35.2	<b>294</b>	<b>32.0</b>	294	31.9	267	35.2	<b>294</b>	<b>32.0</b>
444.namd	424	18.9	<b>424</b>	<b>18.9</b>	424	18.9	424	18.9	<b>424</b>	<b>18.9</b>	424	18.9
447.dealII	310	36.8	309	37.0	<b>309</b>	<b>37.0</b>	305	37.5	305	37.5	<b>305</b>	<b>37.5</b>
450.soplex	<b>268</b>	<b>31.1</b>	268	31.1	268	31.1	266	31.4	264	31.6	<b>265</b>	<b>31.4</b>
453.povray	189	28.2	<b>187</b>	<b>28.5</b>	187	28.5	146	36.4	<b>145</b>	<b>36.7</b>	144	36.8
454.calculix	299	27.6	<b>299</b>	<b>27.6</b>	299	27.6	<b>286</b>	<b>28.9</b>	286	28.9	286	28.9
459.GemsFDTD	226	47.0	<b>225</b>	<b>47.1</b>	208	51.1	155	68.6	155	68.6	<b>155</b>	<b>68.6</b>
465.tonto	<b>412</b>	<b>23.9</b>	412	23.9	412	23.9	<b>311</b>	<b>31.7</b>	310	31.7	311	31.7
470.lbm	<b>225</b>	<b>61.2</b>	225	61.2	224	61.2	221	62.3	<b>221</b>	<b>62.1</b>	221	62.1
481.wrf	<b>267</b>	<b>41.8</b>	268	41.7	266	42.0	240	46.6	237	47.0	<b>239</b>	<b>46.7</b>
482.sphinx3	456	42.8	451	43.2	<b>455</b>	<b>42.9</b>	456	42.8	451	43.2	<b>455</b>	<b>42.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disabled  
Intel HT Technology = Disabled  
Performance/Power Setting = Traditional



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 43.8**

PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz

**SPECfp\_base2006 = 40.9**

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 43.8

PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_base2006 = 40.9

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 43.8**

**PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz**

**SPECfp\_base2006 = 40.9**

**CPU2006 license:** 19

**Test date:** Aug-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 43.8

PRIMERGY BX620 S6, Intel Xeon X5660, 2.80 GHz

SPECfp\_base2006 = 40.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:06:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 September 2010.