



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp®_rate2006 = 474

SPECfp_rate_base2006 = 465

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Apr-2010

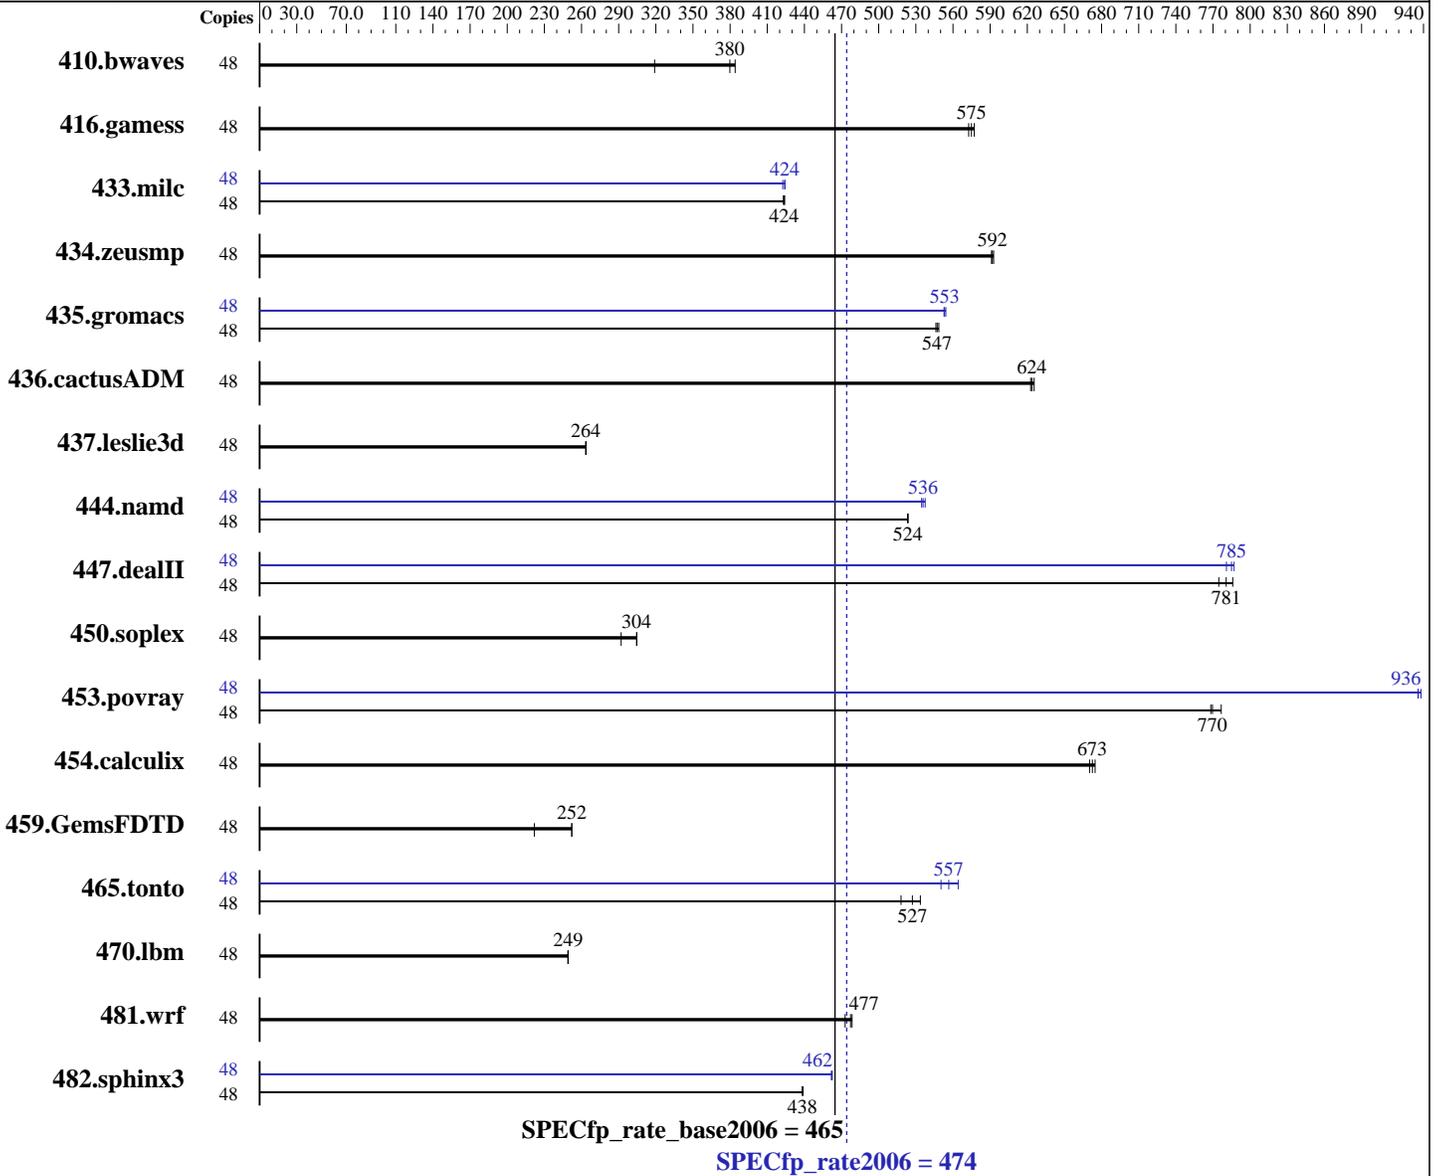

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips per Sun Blade X6275 M2 node
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Enterprise Linux Server release 5.5 kernel 2.6.18-194.el5
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: NFSv4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp_rate2006 = 474

SPECfp_rate_base2006 = 465

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Apr-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, per node)
Disk Subsystem: Sun Storage 7410 System via NFS (See additional details below)
Other Hardware: 10 GbE interface

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	2045	319	<u>1718</u>	<u>380</u>	1698	384	48	2045	319	<u>1718</u>	<u>380</u>	1698	384
416.gamess	48	1628	577	1641	573	<u>1635</u>	<u>575</u>	48	1628	577	1641	573	<u>1635</u>	<u>575</u>
433.milc	48	1042	423	1039	424	<u>1040</u>	<u>424</u>	48	1043	423	1039	424	<u>1039</u>	<u>424</u>
434.zeusmp	48	737	593	739	591	<u>738</u>	<u>592</u>	48	737	593	739	591	<u>738</u>	<u>592</u>
435.gromacs	48	<u>626</u>	<u>547</u>	625	549	627	546	48	<u>620</u>	<u>553</u>	618	554	620	553
436.cactusADM	48	917	626	<u>919</u>	<u>624</u>	921	623	48	917	626	<u>919</u>	<u>624</u>	921	623
437.leslie3d	48	<u>1712</u>	<u>264</u>	1711	264	1713	263	48	<u>1712</u>	<u>264</u>	1711	264	1713	263
444.namd	48	736	523	735	524	<u>735</u>	<u>524</u>	48	720	535	716	538	<u>718</u>	<u>536</u>
447.dealII	48	<u>703</u>	<u>781</u>	699	786	709	775	48	<u>700</u>	<u>785</u>	703	781	698	787
450.soplex	48	1371	292	1314	305	<u>1315</u>	<u>304</u>	48	1371	292	1314	305	<u>1315</u>	<u>304</u>
453.povray	48	<u>332</u>	<u>770</u>	329	777	332	768	48	273	936	<u>273</u>	<u>936</u>	272	938
454.calculix	48	<u>589</u>	<u>673</u>	587	675	591	670	48	<u>589</u>	<u>673</u>	587	675	591	670
459.GemsFDTD	48	2296	222	<u>2020</u>	<u>252</u>	2020	252	48	2296	222	<u>2020</u>	<u>252</u>	2020	252
465.tonto	48	912	518	<u>896</u>	<u>527</u>	885	534	48	<u>849</u>	<u>557</u>	858	550	837	564
470.lbm	48	2646	249	2648	249	<u>2647</u>	<u>249</u>	48	2646	249	2648	249	<u>2647</u>	<u>249</u>
481.wrf	48	1134	473	<u>1123</u>	<u>477</u>	1120	479	48	1134	473	<u>1123</u>	<u>477</u>	1120	479
482.sphinx3	48	2135	438	2132	439	<u>2134</u>	<u>438</u>	48	2023	462	2026	462	<u>2025</u>	<u>462</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used, along with submit.pl to distribute jobs to two nodes of the Sun Blade X6275 M2 server module. It also uses numactl to bind copies to the cores.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp_rate2006 = 474

SPECfp_rate_base2006 = 465

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Apr-2010

Platform Notes

Load Default BIOS Settings and then change the following

Data Reuse Optimization Disabled
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled

Storage Configuration for Disk Subsystem:

Sun Storage 7410 has 2 x J4400 disk shelves. There are 22 x 750 GB 7200 RPM SATA Disks per J4400 disk shelf under RAID-1 configuration mounted over 10GBE network interface with these options "rw,noacl,hard,intr,rsize=65536,wspace=65536" in the /etc/fstab.

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp_rate2006 = 474

SPECfp_rate_base2006 = 465

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Apr-2010

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 474

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp_rate_base2006 = 465

CPU2006 license: 6

Test date: Nov-2010

Test sponsor: Oracle Corporation

Hardware Availability: Dec-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Peak Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
         -fno-alias -opt-prefetch

```

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

```

```

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
          -unroll2 -ansi-alias -scalar-rep-

```

450.soplex: basepeak = yes

```

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
          -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5670 2.93 GHz)

SPECfp_rate2006 = 474

SPECfp_rate_base2006 = 465

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.html>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html
<http://www.spec.org/cpu2006/flags/Sun-Blade-6275M2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.xml>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml
<http://www.spec.org/cpu2006/flags/Sun-Blade-6275M2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:50:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.