



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint®_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

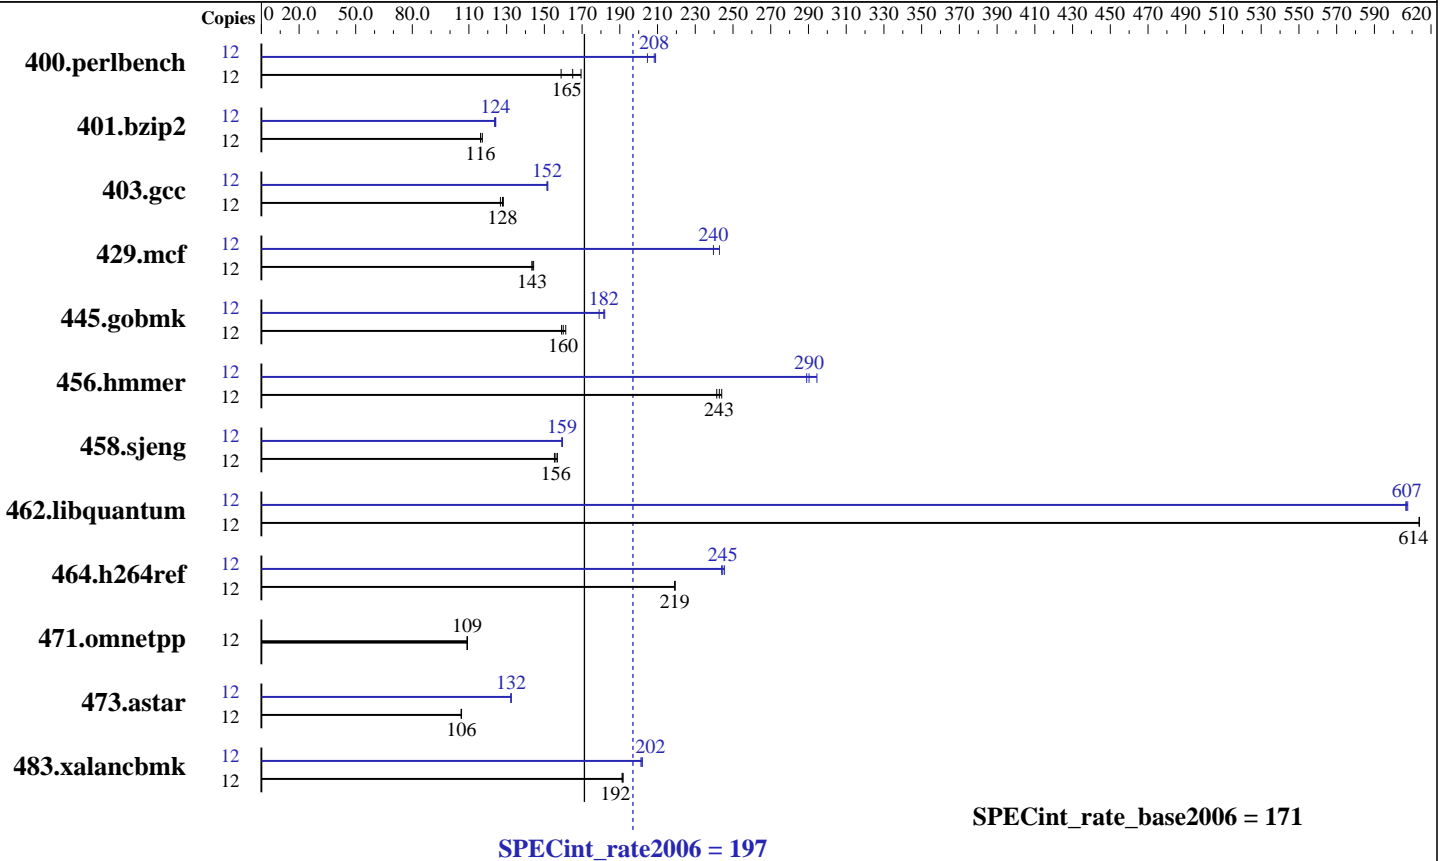

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.5,
 Kernel 2.6.18-194.el5
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	692	169	<u>710</u>	<u>165</u>	738	159	12	573	205	<u>563</u>	<u>208</u>	561	209
401.bzip2	12	989	117	997	116	<u>996</u>	<u>116</u>	12	937	124	<u>933</u>	<u>124</u>	932	124
403.gcc	12	753	128	762	127	<u>756</u>	<u>128</u>	12	<u>637</u>	<u>152</u>	636	152	638	151
429.mcf	12	<u>763</u>	<u>143</u>	763	143	758	144	12	451	243	457	240	<u>457</u>	<u>240</u>
445.gobmk	12	780	161	<u>787</u>	<u>160</u>	791	159	12	703	179	692	182	<u>694</u>	<u>182</u>
456.hammer	12	464	241	459	244	<u>461</u>	<u>243</u>	12	<u>386</u>	<u>290</u>	387	289	380	294
458.sjeng	12	<u>930</u>	<u>156</u>	935	155	925	157	12	912	159	910	160	<u>911</u>	<u>159</u>
462.libquantum	12	405	614	405	614	<u>405</u>	<u>614</u>	12	410	607	409	608	<u>410</u>	<u>607</u>
464.h264ref	12	1211	219	<u>1212</u>	<u>219</u>	1212	219	12	1082	245	1089	244	<u>1086</u>	<u>245</u>
471.omnetpp	12	<u>688</u>	<u>109</u>	686	109	688	109	12	<u>688</u>	<u>109</u>	686	109	688	109
473.astar	12	796	106	794	106	<u>795</u>	<u>106</u>	12	637	132	636	132	<u>636</u>	<u>132</u>
483.xalancbmk	12	<u>432</u>	<u>192</u>	433	191	432	192	12	412	201	<u>410</u>	<u>202</u>	410	202

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
The system uses a Supermicro H8SGL-F motherboard.

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint_rate2006 = 197

SPECint_rate_base2006 = 171

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:55:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 January 2011.