



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DX79SI motherboard (Intel Core i7-3960X Extreme Edition)

SPECfp<sup>®</sup>\_rate2006 = 200

SPECfp\_rate\_base2006 = 198

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

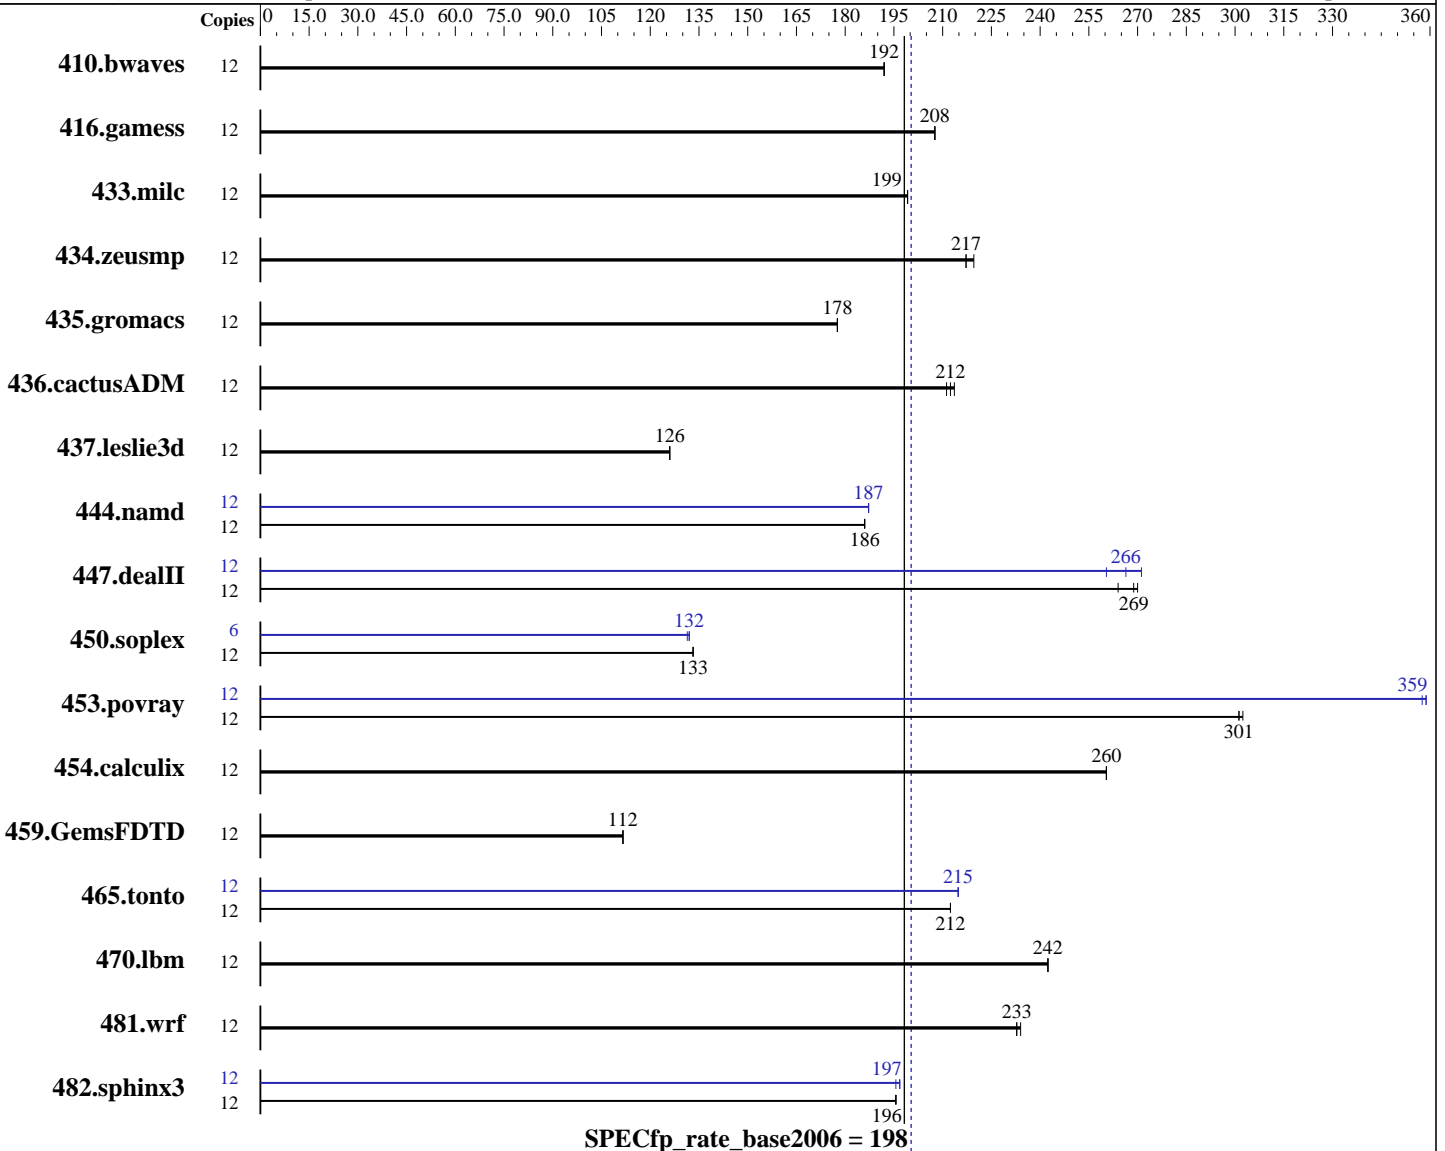

### Hardware

CPU Name: Intel Core i7-3960X Extreme Edition  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: C/C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;  
 Fortran: Version 12.0.3.176 of Intel Visual Fortran Studio XE for Windows;  
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1  
 Auto Parallel: No  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DX79SI motherboard (Intel Core i7-3960X Extreme Edition)

SPECfp\_rate2006 = 200

SPECfp\_rate\_base2006 = 198

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2011  
Hardware Availability: Nov-2011  
Software Availability: Apr-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-11)  
Disk Subsystem: Intel 160 GB SSD  
Other Hardware: None

System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	851	192	848	192	<b>848</b>	<b>192</b>	12	851	192	848	192	<b>848</b>	<b>192</b>
416.gamess	12	1132	208	1133	208	<b>1132</b>	<b>208</b>	12	1132	208	1133	208	<b>1132</b>	<b>208</b>
433.milc	12	554	199	<b>554</b>	<b>199</b>	555	199	12	554	199	<b>554</b>	<b>199</b>	555	199
434.zeusmp	12	<b>502</b>	<b>217</b>	499	220	503	217	12	<b>502</b>	<b>217</b>	499	220	503	217
435.gromacs	12	482	178	<b>482</b>	<b>178</b>	482	178	12	482	178	<b>482</b>	<b>178</b>	482	178
436.cactusADM	12	680	211	<b>676</b>	<b>212</b>	673	214	12	680	211	<b>676</b>	<b>212</b>	673	214
437.leslie3d	12	893	126	<b>893</b>	<b>126</b>	892	126	12	893	126	<b>893</b>	<b>126</b>	892	126
444.namd	12	518	186	518	186	<b>518</b>	<b>186</b>	12	<b>514</b>	<b>187</b>	514	187	514	187
447.dealII	12	<b>510</b>	<b>269</b>	520	264	509	270	12	506	271	<b>514</b>	<b>266</b>	527	260
450.soplex	12	<b>752</b>	<b>133</b>	752	133	752	133	6	<b>380</b>	<b>132</b>	378	132	381	131
453.povray	12	<b>212</b>	<b>301</b>	212	301	211	302	12	178	359	179	358	<b>178</b>	<b>359</b>
454.calculix	12	381	260	<b>381</b>	<b>260</b>	381	260	12	381	260	<b>381</b>	<b>260</b>	381	260
459.GemsFDTD	12	1136	112	1138	112	<b>1137</b>	<b>112</b>	12	1136	112	1138	112	<b>1137</b>	<b>112</b>
465.tonto	12	<b>557</b>	<b>212</b>	557	212	557	212	12	549	215	<b>549</b>	<b>215</b>	550	215
470.lbm	12	681	242	681	242	<b>681</b>	<b>242</b>	12	681	242	681	242	<b>681</b>	<b>242</b>
481.wrf	12	576	233	574	234	<b>575</b>	<b>233</b>	12	576	233	574	234	<b>575</b>	<b>233</b>
482.sphinx3	12	1195	196	<b>1197</b>	<b>196</b>	1198	196	12	1194	196	<b>1186</b>	<b>197</b>	1186	197

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
The start command with the /affinity switch was used to bind processes to cores

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
System was configured with an ATI HD 6990 discrete graphics card



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel DX79SI motherboard (Intel Core i7-3960X  
Extreme Edition)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 198**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Oct-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Apr-2011

## Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64 -names:lowercase  
 416.gamess: -DSPEC\_CPU\_P64  
 433.milc: -DSPEC\_CPU\_P64  
 434.zeusmp: -DSPEC\_CPU\_P64  
 435.gromacs: -DSPEC\_CPU\_P64  
 436.cactusADM: -DSPEC\_CPU\_P64 /names:lowercase /assume:underscore  
 437.lelie3d: -DSPEC\_CPU\_P64  
 444.namd: -DSPEC\_CPU\_P64 /TP  
 447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 450.soplex: -DSPEC\_CPU\_P64  
 453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER /names:lowercase  
 459.GemsFDTD: -DSPEC\_CPU\_P64  
 465.tonto: -DSPEC\_CPU\_P64  
 470.lbm: -DSPEC\_CPU\_P64  
 481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000  
-link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features  
-Qauto-ilp32 /F1000000000 shlw64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000  
-link /FORCE:MULTIPLE

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel DX79SI motherboard (Intel Core i7-3960X Extreme Edition)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 198**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Oct-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Apr-2011

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE
```

## Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc9 -Qstd=c99 ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE
```

```
447.dealIII: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep-
-Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DX79SI motherboard (Intel Core i7-3960X Extreme Edition)

SPECfp\_rate2006 = 200

SPECfp\_rate\_base2006 = 198

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

450.soplex: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib  
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000  
sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DX79SI motherboard (Intel Core i7-3960X Extreme Edition)

SPECfp\_rate2006 = 200

SPECfp\_rate\_base2006 = 198

**CPU2006 license:** 13  
**Test sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test date:** Oct-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:09:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 December 2011.