



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55


Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

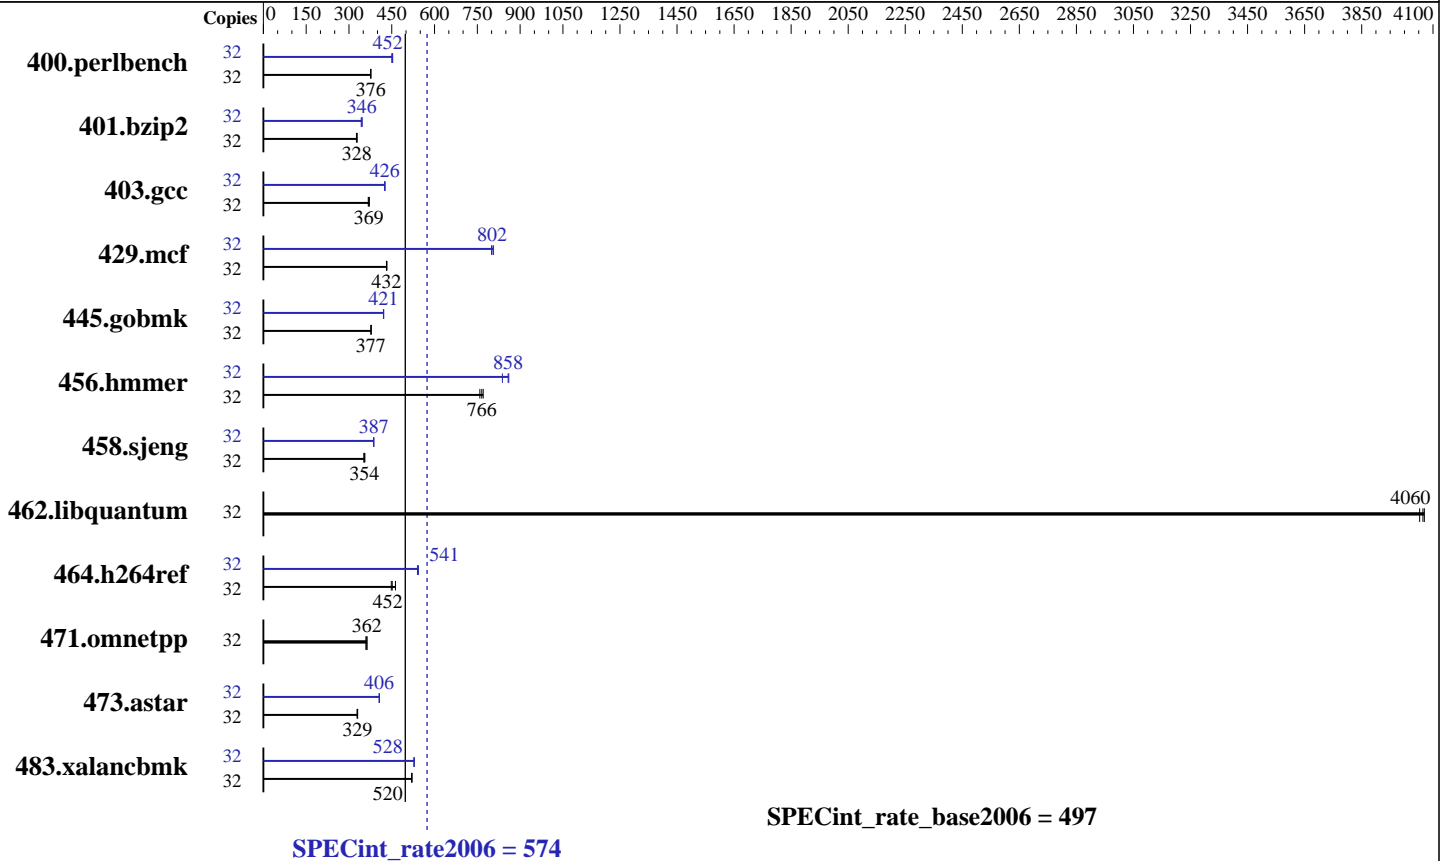

## Hardware

CPU Name: AMD Opteron 6284 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 3 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64)  
 3.0.13-0.27-default  
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jun-2012  
Hardware Availability: Jul-2012  
Software Availability: Jul-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	830	377	<b>831</b>	<b>376</b>	831	376	32	695	450	<b>692</b>	<b>452</b>	690	453
401.bzip2	32	947	326	941	328	<b>941</b>	<b>328</b>	32	<b>893</b>	<b>346</b>	900	343	893	346
403.gcc	32	701	368	693	372	<b>697</b>	<b>369</b>	32	605	426	605	426	<b>605</b>	<b>426</b>
429.mcf	32	<b>676</b>	<b>432</b>	674	433	676	431	32	362	807	365	800	<b>364</b>	<b>802</b>
445.gobmk	32	888	378	890	377	<b>890</b>	<b>377</b>	32	<b>797</b>	<b>421</b>	798	421	796	422
456.hammer	32	<b>390</b>	<b>766</b>	393	759	387	771	32	356	838	<b>348</b>	<b>858</b>	347	860
458.sjeng	32	1100	352	1088	356	<b>1094</b>	<b>354</b>	32	<b>1002</b>	<b>387</b>	1000	387	1002	386
462.libquantum	32	164	4050	163	4070	<b>163</b>	<b>4060</b>	32	164	4050	163	4070	<b>163</b>	<b>4060</b>
464.h264ref	32	1579	448	<b>1568</b>	<b>452</b>	1530	463	32	1311	540	1303	543	<b>1308</b>	<b>541</b>
471.omnetpp	32	557	359	550	363	<b>552</b>	<b>362</b>	32	557	359	550	363	<b>552</b>	<b>362</b>
473.astar	32	680	331	684	329	<b>682</b>	<b>329</b>	32	552	407	<b>553</b>	<b>406</b>	553	406
483.xalancbmk	32	424	520	<b>424</b>	<b>520</b>	424	520	32	418	528	<b>418</b>	<b>528</b>	418	529

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jun-2012  
Hardware Availability: Jul-2012  
Software Availability: Jul-2011

## Base Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2  
  
C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on  
 -GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
          -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
          -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
          -WOPT:sib=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
            -OPT:unroll_times_max=2 -IPA:plimit=20000
            -OPT:alias=disjoint -CG:ptr_load_use=0
            -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
          -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bd=2m:heap=2m
```

```
483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
              -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
              -INLINE:aggressive=on -m32 -CG:cmp_peep=on
              -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
              -TENV:frame_pointer=off -fno-emit-exceptions
              -L/root/work/libraries/SmartHeap-10/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 574

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECint\_rate\_base2006 = 497

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:33:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.