



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp®2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

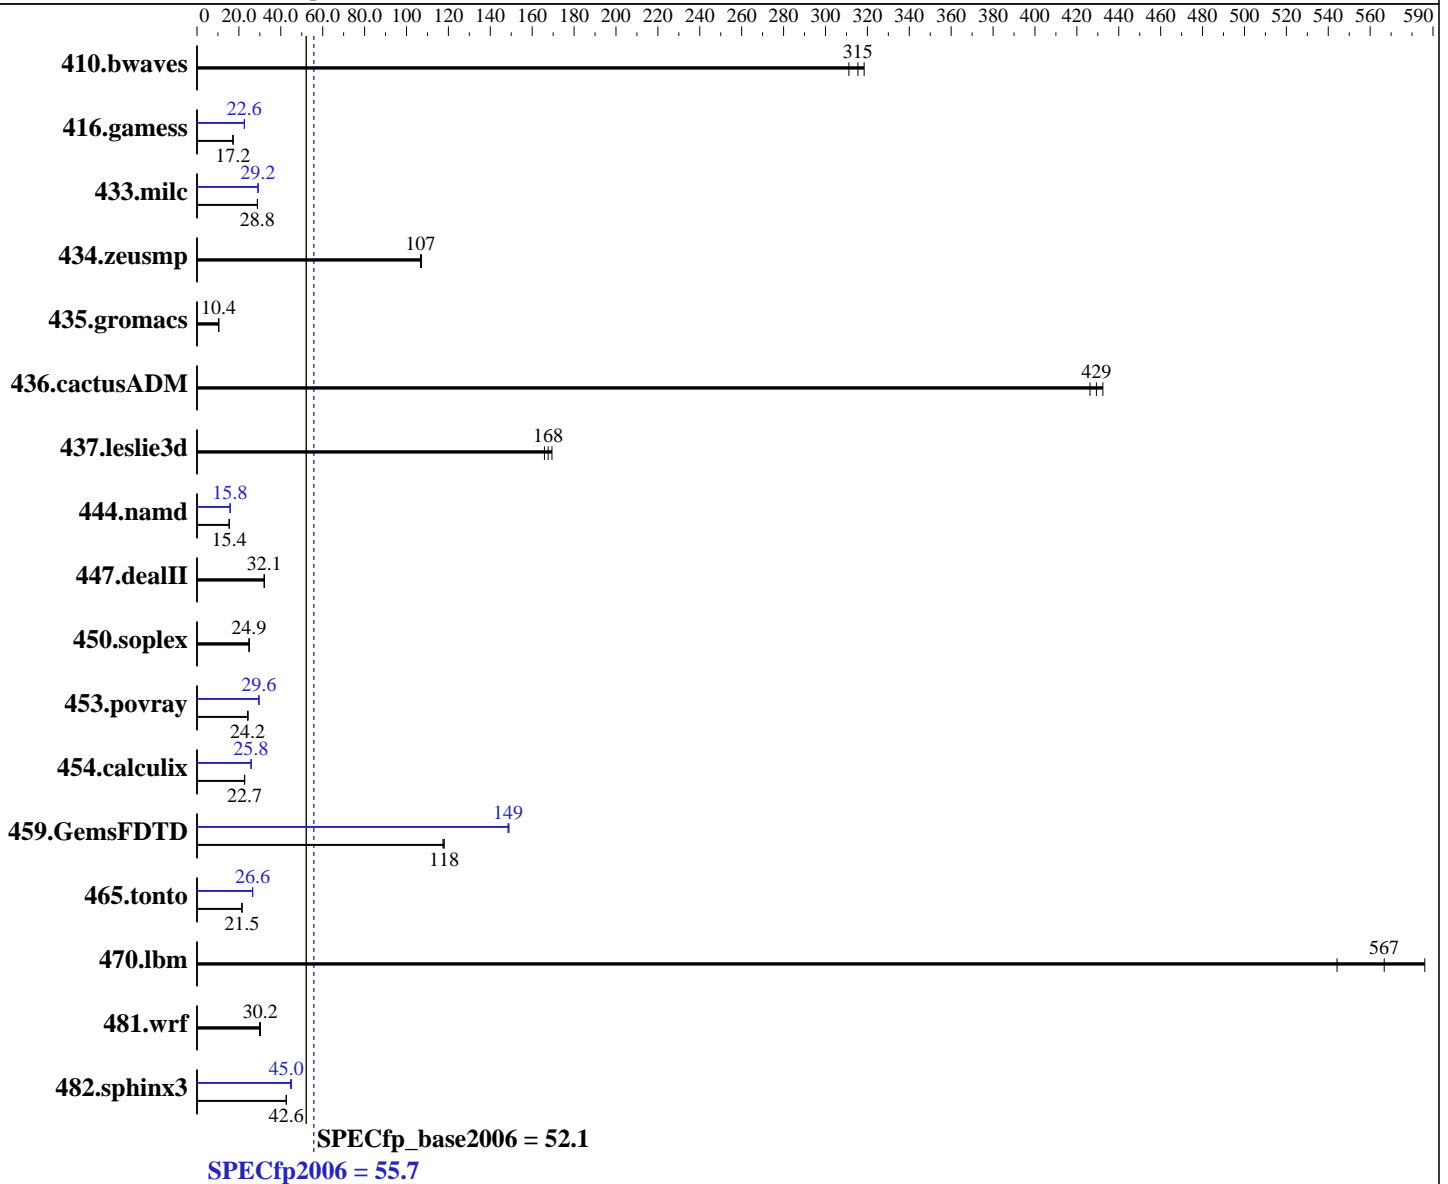

Hardware

CPU Name: Intel Xeon E7-4860
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = **55.7**

SPECfp_base2006 = **52.1**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (64 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	42.7	318	43.7	311	43.1	315	42.7	318	43.7	311	43.1	315
416.gamess	1137	17.2	1139	17.2	1139	17.2	866	22.6	865	22.6	866	22.6
433.milc	318	28.9	318	28.8	318	28.8	315	29.1	315	29.2	315	29.2
434.zeusmp	84.9	107	85.3	107	85.3	107	84.9	107	85.3	107	85.3	107
435.gromacs	690	10.4	688	10.4	690	10.3	690	10.4	688	10.4	690	10.3
436.cactusADM	27.8	429	28.0	426	27.6	432	27.8	429	28.0	426	27.6	432
437.leslie3d	56.1	168	55.5	169	56.7	166	56.1	168	55.5	169	56.7	166
444.namd	521	15.4	521	15.4	521	15.4	507	15.8	507	15.8	507	15.8
447.dealII	356	32.1	356	32.1	356	32.1	356	32.1	356	32.1	356	32.1
450.soplex	335	24.9	336	24.9	335	24.9	335	24.9	336	24.9	335	24.9
453.povray	221	24.1	220	24.2	218	24.4	180	29.6	180	29.5	180	29.6
454.calculix	362	22.8	364	22.6	364	22.7	319	25.8	319	25.8	319	25.8
459.GemsFDTD	90.0	118	90.4	117	90.0	118	71.2	149	71.4	149	71.4	149
465.tonto	459	21.4	458	21.5	458	21.5	370	26.6	371	26.6	371	26.5
470.lbm	23.4	586	25.2	544	24.2	567	23.4	586	25.2	544	24.2	567
481.wrf	369	30.3	370	30.2	374	29.9	369	30.3	370	30.2	374	29.9
482.sphinx3	457	42.6	456	42.7	458	42.6	432	45.1	436	44.7	433	45.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Turbo Boost Power Optimization set to Traditional in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on ghidorah-pete Sat Sep 29 00:36:41 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2012
Hardware Availability: May-2011
Software Availability: Dec-2011

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E7- 4860 @ 2.27GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
physical 2: cores 0 1 2 8 9 16 17 18 24 25
physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB
```

```
From /proc/meminfo
MemTotal:      529211644 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux ghidorah-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 28 16:08
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/vg_ghidorahpete-lv_root
                ext4      264G   91G 161G  37% /
```

```
Additional information from dmidecode:
Memory:
64x Hynix HMT31GR7BFR8A-G7 8 GB 1067 MHz 4 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"
OMP_NUM_THREADS = "40"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

`470.lbm: basepeak = yes`

`482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4860, 2.27 GHz)

SPECfp2006 = 55.7

SPECfp_base2006 = 52.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:52:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 October 2012.