



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp<sup>®</sup>2006 = 88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_base2006 = 83.9**

**CPU2006 license:** 11


**Test date:** Sep-2013

**Test sponsor:** IBM Corporation

**Hardware Availability:** Oct-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

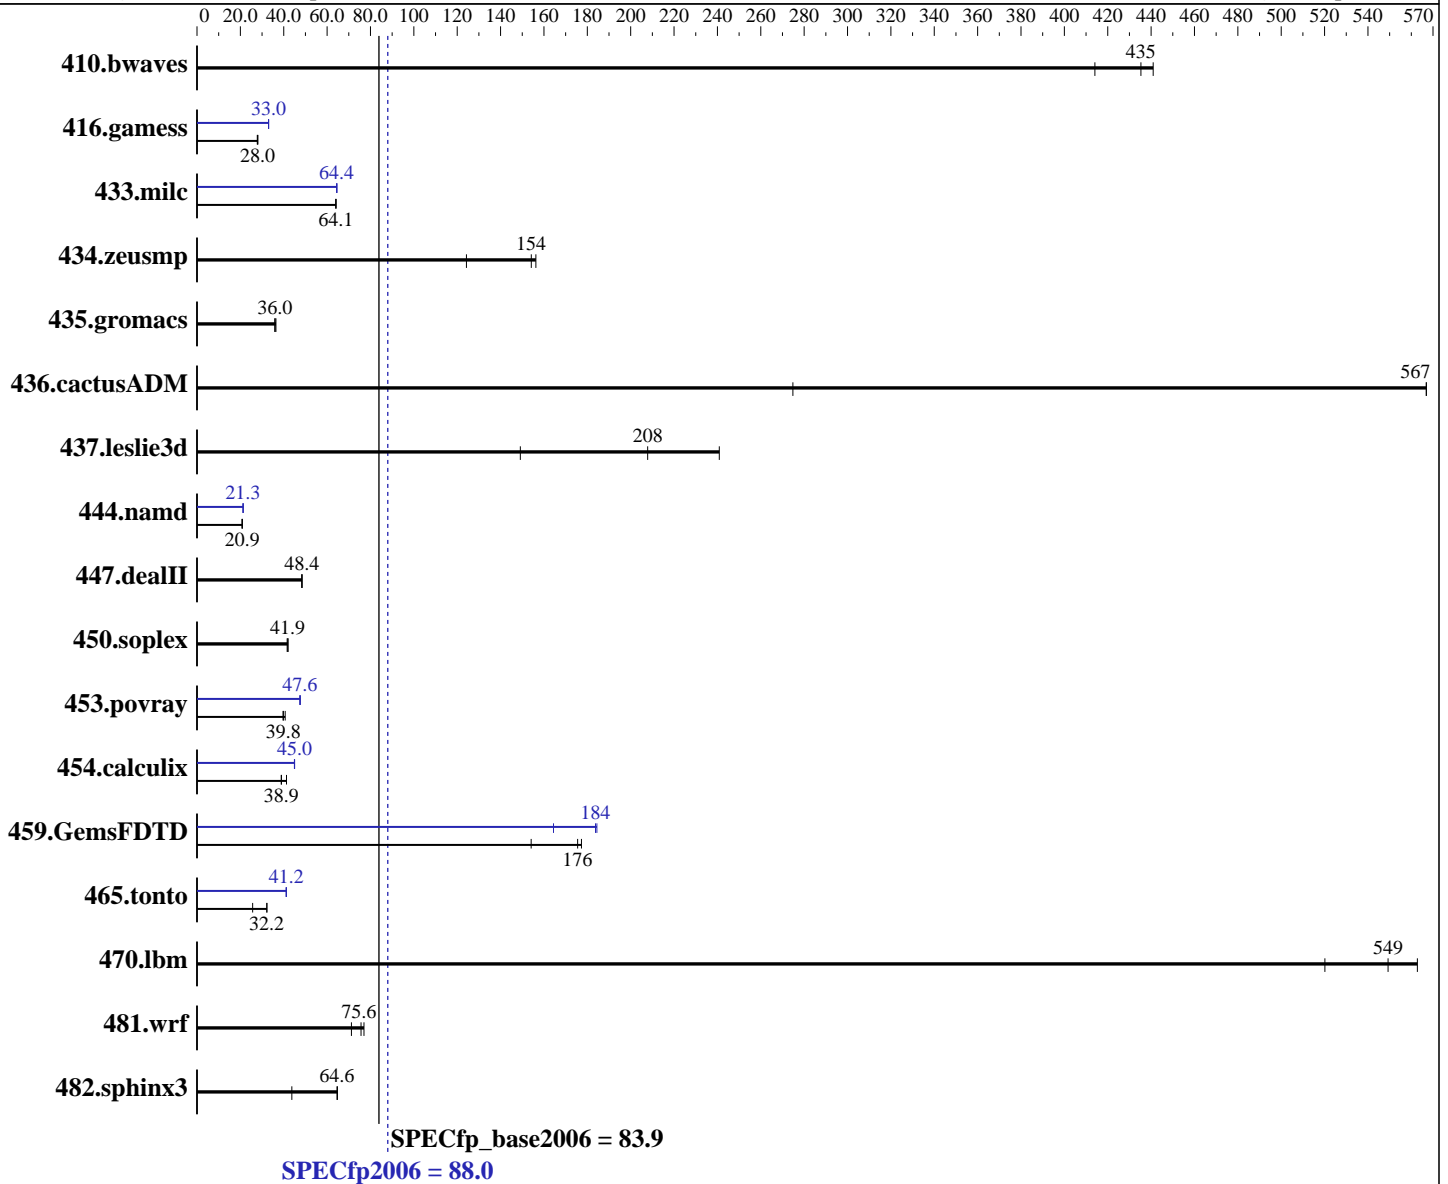

### Hardware

CPU Name: Intel Xeon E5-2660 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = **88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp\_base2006 = **83.9**

CPU2006 license: 11

Test date: Sep-2013

Test sponsor: IBM Corporation

Hardware Availability: Oct-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 2 x 250 GB SATA, 7200 RPM, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	30.8	441	32.8	414	<u>31.2</u>	<u>435</u>	30.8	441	32.8	414	<u>31.2</u>	<u>435</u>
416.gamess	704	27.8	698	28.0	<u>700</u>	<u>28.0</u>	593	33.0	<u>593</u>	<u>33.0</u>	593	33.0
433.milc	143	64.0	143	64.1	<u>143</u>	<u>64.1</u>	142	64.4	<u>142</u>	<u>64.4</u>	142	64.5
434.zeusmp	58.2	156	<u>59.0</u>	<u>154</u>	73.2	124	58.2	156	<u>59.0</u>	<u>154</u>	73.2	124
435.gromacs	196	36.4	<u>198</u>	<u>36.0</u>	199	35.9	196	36.4	<u>198</u>	<u>36.0</u>	199	35.9
436.cactusADM	<u>21.1</u>	<u>567</u>	21.1	567	43.5	275	<u>21.1</u>	<u>567</u>	21.1	567	43.5	275
437.leslie3d	<u>45.2</u>	<u>208</u>	63.0	149	39.0	241	<u>45.2</u>	<u>208</u>	63.0	149	39.0	241
444.namd	<u>385</u>	<u>20.9</u>	384	20.9	385	20.8	<u>377</u>	<u>21.3</u>	377	21.3	377	21.3
447.dealII	<u>236</u>	<u>48.4</u>	236	48.4	237	48.4	<u>236</u>	<u>48.4</u>	236	48.4	237	48.4
450.soplex	<u>199</u>	<u>41.9</u>	199	42.0	201	41.6	<u>199</u>	<u>41.9</u>	199	42.0	201	41.6
453.povray	134	39.7	131	40.7	<u>134</u>	<u>39.8</u>	<u>112</u>	<u>47.6</u>	112	47.4	112	47.6
454.calculix	200	41.3	<u>212</u>	<u>38.9</u>	212	38.9	183	45.0	<u>183</u>	<u>45.0</u>	184	44.9
459.GemsFDTD	59.8	177	<u>60.4</u>	<u>176</u>	68.8	154	64.5	164	57.5	184	<u>57.7</u>	<u>184</u>
465.tonto	<u>306</u>	<u>32.2</u>	383	25.7	305	32.3	239	41.2	<u>239</u>	<u>41.2</u>	239	41.1
470.lbm	24.4	563	<u>25.0</u>	<u>549</u>	26.4	520	24.4	563	<u>25.0</u>	<u>549</u>	26.4	520
481.wrf	157	71.2	145	77.0	<u>148</u>	<u>75.6</u>	157	71.2	145	77.0	<u>148</u>	<u>75.6</u>
482.sphinx3	301	64.8	<u>302</u>	<u>64.6</u>	446	43.7	301	64.8	<u>302</u>	<u>64.6</u>	446	43.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Hyper-Threading set to Disabled  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on nx360M4 Fri Sep 13 14:45:09 2013

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_base2006 = 83.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz
 2 "physical id"s (chips)
 20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal: 132230148 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 13 14:32
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_xc360m4-lv_home
ext4 403G 264G 119G 69% /home
```

```
Additional information from dmidecode:
BIOS IBM -[FHE105F1N-1.00]- 08/19/2013
Memory:
8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_base2006 = 83.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"  
OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

- 410.bwaves: -DSPEC\_CPU\_LP64
- 416.gamess: -DSPEC\_CPU\_LP64
- 433.milc: -DSPEC\_CPU\_LP64
- 434.zeusmp: -DSPEC\_CPU\_LP64
- 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main
- 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main
- 437.leslie3d: -DSPEC\_CPU\_LP64
- 444.namd: -DSPEC\_CPU\_LP64
- 447.dealII: -DSPEC\_CPU\_LP64
- 450.soplex: -DSPEC\_CPU\_LP64
- 453.povray: -DSPEC\_CPU\_LP64
- 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main
- 459.GemsFDTD: -DSPEC\_CPU\_LP64
- 465.tonto: -DSPEC\_CPU\_LP64
- 470.lbm: -DSPEC\_CPU\_LP64
- 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX
- 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_base2006 = 83.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 88.0**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_base2006 = 83.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = 88.0

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp\_base2006 = 83.9

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:18:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2013.