



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei Tecal RH2285H V2

SPECfp®_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: Jan-2014

Software Availability: Nov-2013

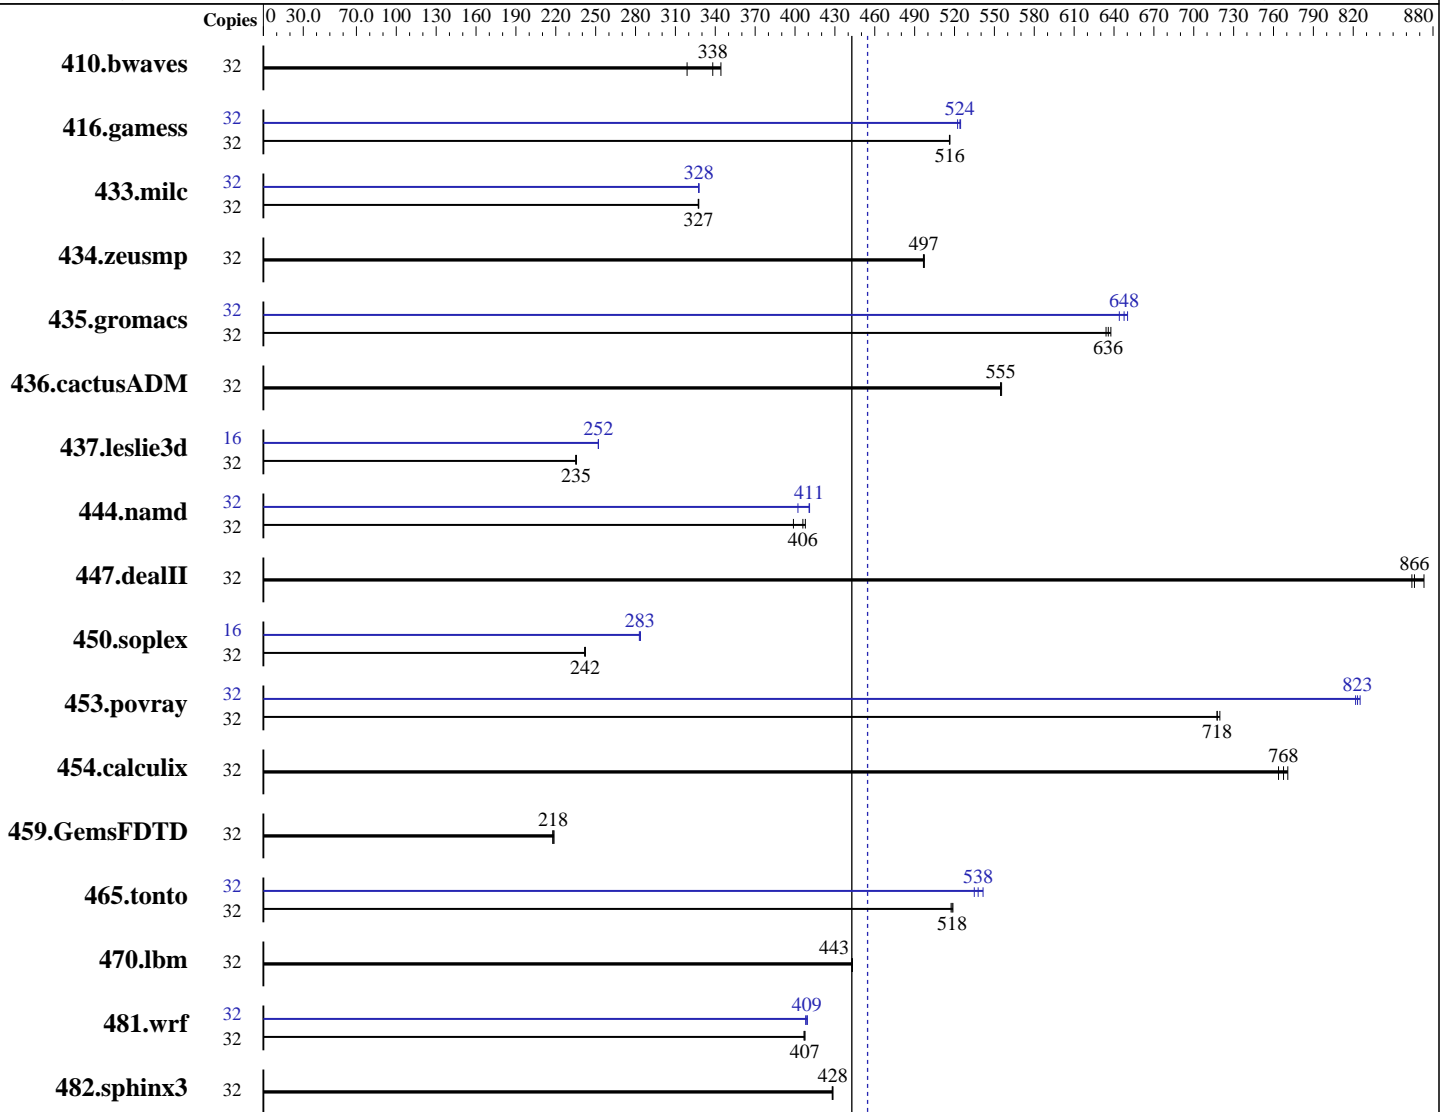

SPECfp_rate_base2006 = 443

SPECfp_rate2006 = 455

Hardware

CPU Name: Intel Xeon E5-2450 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: Jan-2014

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1263	344	<u>1286</u>	<u>338</u>	1364	319	32	1263	344	<u>1286</u>	<u>338</u>	1364	319
416.gamess	32	<u>1213</u>	<u>516</u>	1214	516	1213	516	32	1200	522	<u>1196</u>	<u>524</u>	1194	525
433.milc	32	898	327	<u>897</u>	<u>327</u>	897	327	32	<u>897</u>	<u>328</u>	896	328	897	328
434.zeusmp	32	586	497	<u>586</u>	<u>497</u>	586	497	32	586	497	<u>586</u>	<u>497</u>	586	497
435.gromacs	32	<u>359</u>	<u>636</u>	360	634	358	638	32	<u>353</u>	<u>648</u>	355	644	351	650
436.cactusADM	32	688	555	689	555	<u>689</u>	<u>555</u>	32	688	555	689	555	<u>689</u>	<u>555</u>
437.leslie3d	32	1277	236	1280	235	<u>1279</u>	<u>235</u>	16	597	252	597	252	<u>597</u>	<u>252</u>
444.namd	32	644	399	<u>632</u>	<u>406</u>	629	408	32	638	402	<u>625</u>	<u>411</u>	625	411
447.dealII	32	<u>423</u>	<u>866</u>	424	864	419	873	32	<u>423</u>	<u>866</u>	424	864	419	873
450.soplex	32	1102	242	<u>1102</u>	<u>242</u>	1104	242	16	470	284	<u>471</u>	<u>283</u>	472	283
453.povray	32	237	718	237	720	<u>237</u>	<u>718</u>	32	207	822	<u>207</u>	<u>823</u>	206	825
454.calculix	32	346	764	<u>344</u>	<u>768</u>	343	771	32	346	764	<u>344</u>	<u>768</u>	343	771
459.GemsFDTD	32	1552	219	1560	218	<u>1557</u>	<u>218</u>	32	1552	219	1560	218	<u>1557</u>	<u>218</u>
465.tonto	32	607	519	<u>608</u>	<u>518</u>	609	517	32	589	535	582	541	<u>586</u>	<u>538</u>
470.lbm	32	<u>993</u>	<u>443</u>	993	443	992	443	32	<u>993</u>	<u>443</u>	993	443	992	443
481.wrf	32	<u>877</u>	<u>407</u>	879	407	877	407	32	<u>874</u>	<u>409</u>	873	409	876	408
482.sphinx3	32	<u>1456</u>	<u>428</u>	1457	428	1455	429	32	<u>1456</u>	<u>428</u>	1457	428	1455	429

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Sysinfo program /spec/config/sysinfo.rev6818

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sat Mar 29 16:06:54 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2450 v2 @ 2.50GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      99010156 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 29 04:01
```

```
SPEC is set to: /spec
Filesystem                                Type
Size Used Avail Use% Mounted on
/dev/mapper/ddf1_4c534920202020201000006019e5d2034711471157d3ceb3p2 ext4
260G  40G  208G  16% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV365 09/06/2013
Memory:
12x Micron 36JSF1G72PZ-1G6K1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

The Huawei RH2285H v2 and Huawei RH2285 v2 models are electronically equivalent. The results have been measured on a Huawei RH2285H v2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

Peak Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei Tecal RH2285H V2

SPECfp_rate2006 = 455

SPECfp_rate_base2006 = 443

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Jan-2014
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:10:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 April 2014.