



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint®2006 = 39.2

SPECint_base2006 = 36.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

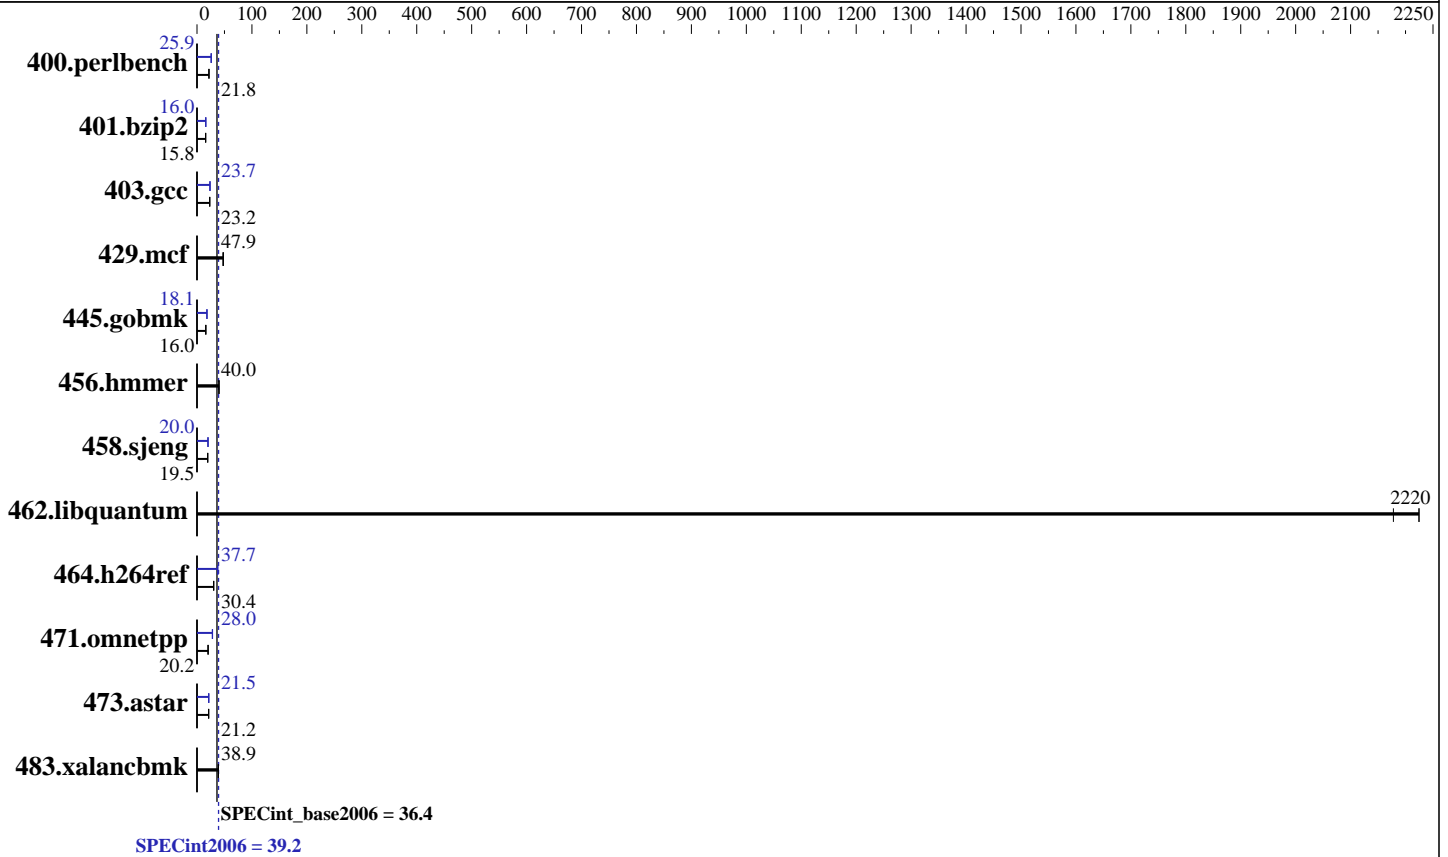

Hardware

CPU Name: Intel Xeon E5-2428L v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint2006 = 39.2

SPECint_base2006 = 36.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	449	21.7	449	21.8	449	21.8	<u>377</u>	<u>25.9</u>	377	25.9	378	25.8
401.bzip2	612	15.8	612	15.8	613	15.7	603	16.0	604	16.0	604	16.0
403.gcc	347	23.2	348	23.2	347	23.2	340	23.7	340	23.7	341	23.6
429.mcf	190	47.9	190	48.1	193	47.2	190	47.9	190	48.1	193	47.2
445.gobmk	655	16.0	655	16.0	655	16.0	579	18.1	580	18.1	580	18.1
456.hammer	234	40.0	233	40.0	233	40.0	234	40.0	233	40.0	233	40.0
458.sjeng	621	19.5	621	19.5	620	19.5	604	20.0	604	20.0	604	20.0
462.libquantum	9.51	2180	9.31	2220	9.32	2220	9.51	2180	9.31	2220	9.32	2220
464.h264ref	728	30.4	730	30.3	728	30.4	587	37.7	587	37.7	588	37.6
471.omnetpp	309	20.3	309	20.2	311	20.1	224	27.9	223	28.0	220	28.4
473.astar	329	21.3	332	21.2	331	21.2	326	21.5	327	21.5	332	21.2
483.xalancbmk	177	38.9	178	38.7	177	38.9	177	38.9	178	38.7	177	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3530M4 Wed Jun 18 17:48:52 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2428L v2 @ 1.80GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint2006 = 39.2

SPECint_base2006 = 36.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      198316840 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3530M4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 18 17:31
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3530m4-lv_home ext4  404G   16G  368G   4% /home
```

```
Additional information from dmidecode:
BIOS IBM -[BEE136CUS-1.60]- 01/23/2014
Memory:
12x Samsung M393B2G70QH0-YK0 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
OMP_NUM_THREADS = "16"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 39.2

IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint_base2006 = 36.4

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint2006 = 39.2

SPECint_base2006 = 36.4

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias`

456.hmmer: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 39.2

IBM System x3530 M4
(Intel Xeon E5-2428L v2, 1.80 GHz)

SPECint_base2006 = 36.4

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.aster: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:35:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.