



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i3-4130)

SPECfp®2006 = 55.2

SPECfp_base2006 = 54.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

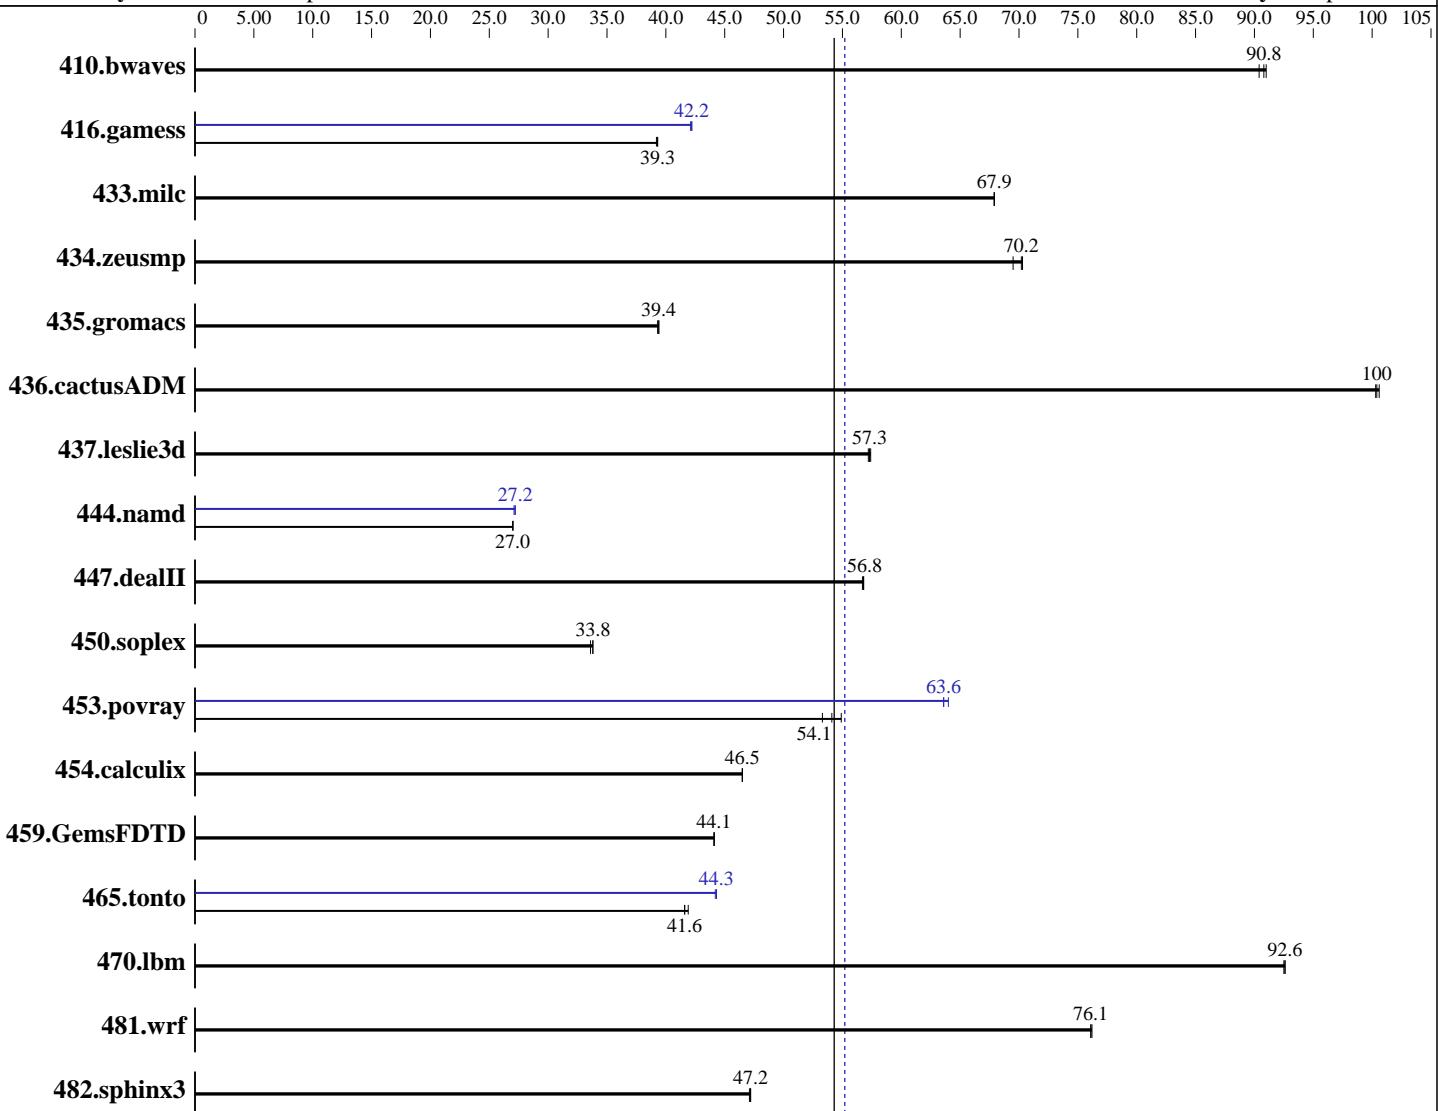

SPECfp_base2006 = 54.3

SPECfp2006 = 55.2

Hardware

CPU Name: Intel Core i3-4130
 CPU Characteristics:
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i3-4130)

SPECfp2006 = 55.2

SPECfp_base2006 = 54.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	150	90.8	150	90.4	149	91.0	150	90.8	150	90.4	149	91.0
416.gamess	500	39.2	498	39.3	498	39.3	464	42.2	466	42.1	464	42.2
433.milc	135	67.9	135	67.9	135	67.9	135	67.9	135	67.9	135	67.9
434.zeusmp	130	70.2	130	70.3	131	69.5	130	70.2	130	70.3	131	69.5
435.gromacs	182	39.3	181	39.4	181	39.4	182	39.3	181	39.4	181	39.4
436.cactusADM	119	100	119	100	119	101	119	100	119	100	119	101
437.leslie3d	164	57.3	164	57.2	164	57.4	164	57.3	164	57.2	164	57.4
444.namd	297	27.0	297	27.0	297	27.0	296	27.1	295	27.2	295	27.2
447.dealII	201	56.8	201	56.8	202	56.7	201	56.8	201	56.8	202	56.7
450.soplex	247	33.8	246	33.8	248	33.6	247	33.8	246	33.8	248	33.6
453.povray	96.9	54.9	99.9	53.3	98.4	54.1	83.1	64.0	83.6	63.6	83.7	63.6
454.calculix	177	46.5	177	46.5	178	46.5	177	46.5	177	46.5	178	46.5
459.GemsFDTD	241	44.1	241	44.1	241	44.1	241	44.1	241	44.1	241	44.1
465.tonto	235	41.9	237	41.6	236	41.6	222	44.3	223	44.2	222	44.3
470.lbm	149	92.5	148	92.6	148	92.6	149	92.5	148	92.6	148	92.6
481.wrf	147	76.1	147	76.2	147	76.1	147	76.1	147	76.2	147	76.1
482.sphinx3	414	47.1	413	47.2	413	47.2	414	47.1	413	47.2	413	47.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:

"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo
 \$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
 running on Clt00224D4FB715 Sat Sep 28 09:29:27 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i3-4130)

SPECfp2006 = 55.2

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 7 Enterprise
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ87PG_
Processor(s)  : 1 Processor(s) Installed.
                 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3400 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 512
L3CacheSize  : 3072
MaxClockSpeed: 3400
Name         : Intel(R) Core(TM) i3-4130 CPU @ 3.40GHz
NumberOfCores: 2
NumberOfLogicalProcessors: 4
```

```
(End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation	SPECfp2006 =	55.2
Intel DQ87PG motherboard (Intel Core i3-4130)	SPECfp_base2006 =	54.3
CPU2006 license: 13	Test date:	Sep-2013
Test sponsor: Intel Corporation	Hardware Availability:	Sep-2013
Tested by: Intel Corporation	Software Availability:	Apr-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
  433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
  437.leslie3d: -DSPEC_CPU_P64
  444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
  -Qoption_cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
  465.tonto: -DSPEC_CPU_P64
  470.lbm: -DSPEC_CPU_P64
  481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F10000000000

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F10000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i3-4130)

SPECfp2006 =

55.2

SPECfp_base2006 =

54.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date:

Sep-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
           shlw64M.lib           -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O3 -Qprec-div- -Qunroll14 -Qansi-alias -Qauto-ilp32
            /F1000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O3 -Qprec-div- -Qunroll12 -Ob0 -Qansi-alias
            -Qscalar-rep- /F1000000000
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i3-4130)

SPECfp2006 = 55.2

SPECfp_base2006 = 54.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto -Qinline-calloc
/F10000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 01:06:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.