



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp<sup>®</sup>2006 = **66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

SPECfp\_base2006 = **63.9**

CPU2006 license: 3


Test date: Oct-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

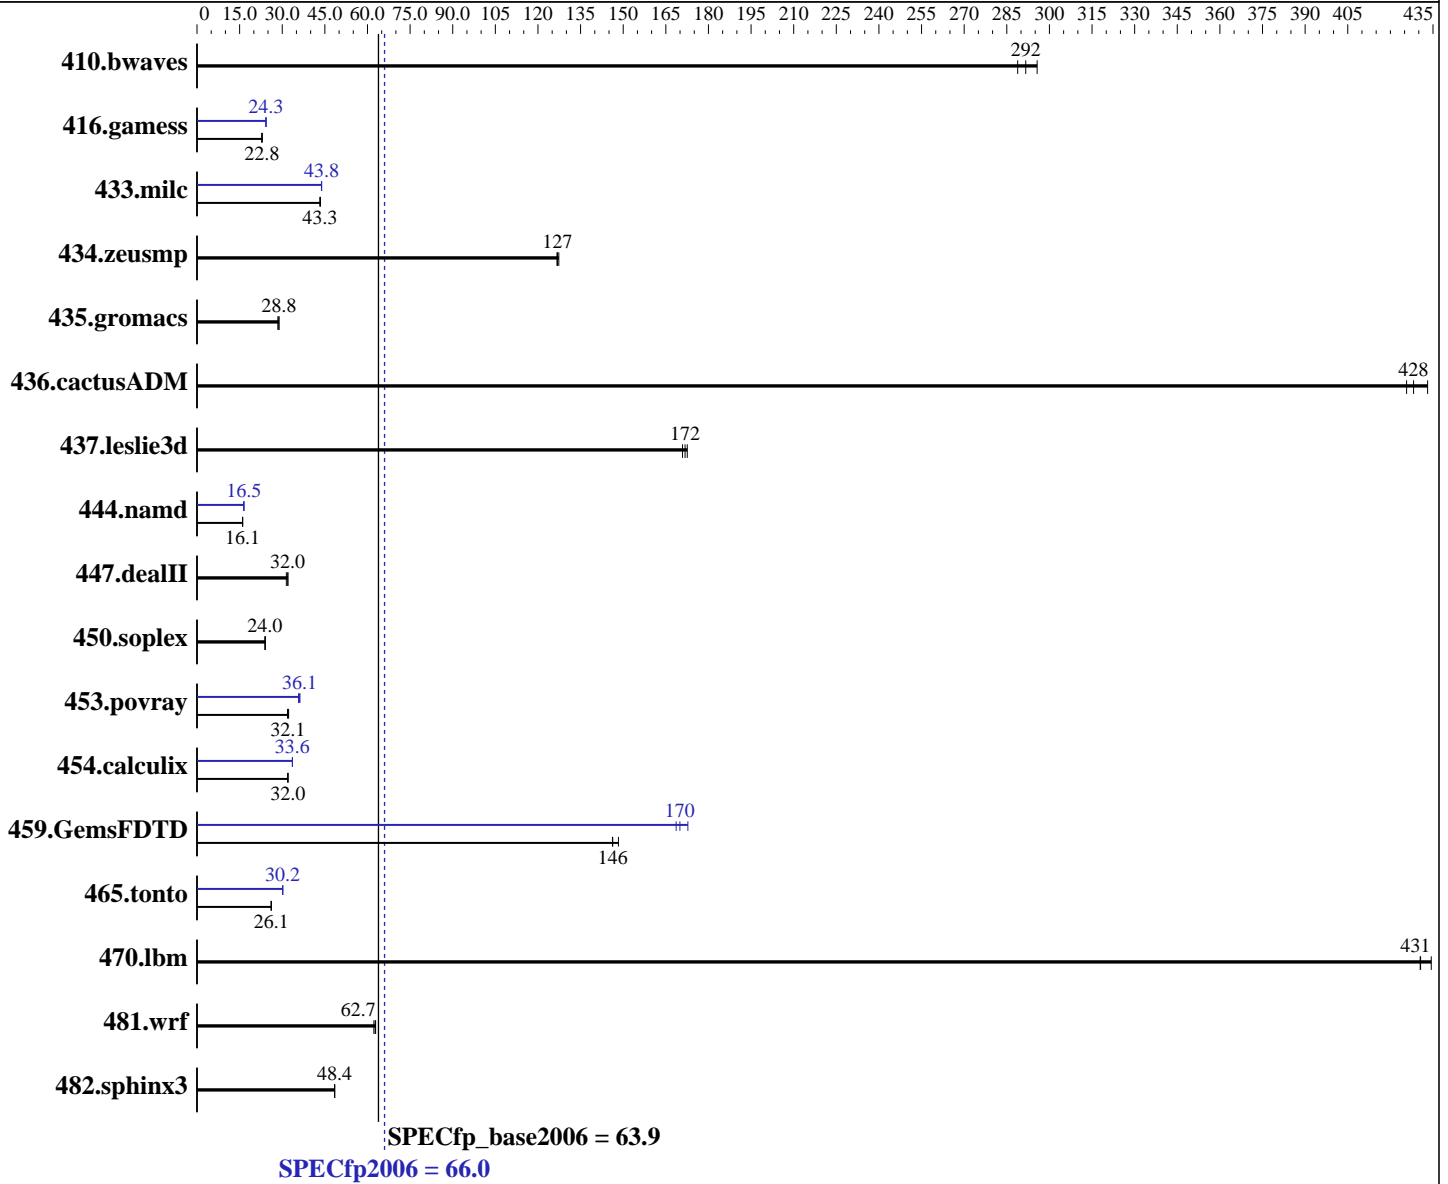

**Hardware**

CPU Name: Intel Xeon E5-2609 v3  
 CPU Characteristics:  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-121.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

SPECfp\_base2006 = **63.9**

CPU2006 license: 3

Test date: Oct-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 1 x 400 GB SSA SAS, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	47.1	289	46.0	296	<b><u>46.6</u></b>	<b><u>292</u></b>	47.1	289	46.0	296	<b><u>46.6</u></b>	<b><u>292</u></b>
416.gamess	<b><u>858</u></b>	<b><u>22.8</u></b>	858	22.8	852	23.0	808	24.2	<b><u>806</u></b>	<b><u>24.3</u></b>	805	24.3
433.milc	211	43.5	212	43.3	<b><u>212</u></b>	<b><u>43.3</u></b>	209	43.9	210	43.8	<b><u>209</u></b>	<b><u>43.8</u></b>
434.zeusmp	<b><u>71.7</u></b>	<b><u>127</u></b>	71.8	127	71.5	127	<b><u>71.7</u></b>	<b><u>127</u></b>	71.8	127	71.5	127
435.gromacs	251	28.5	<b><u>248</u></b>	<b><u>28.8</u></b>	247	28.9	251	28.5	<b><u>248</u></b>	<b><u>28.8</u></b>	247	28.9
436.cactusADM	27.6	433	<b><u>27.9</u></b>	<b><u>428</u></b>	28.1	426	27.6	433	<b><u>27.9</u></b>	<b><u>428</u></b>	28.1	426
437.leslie3d	<b><u>54.7</u></b>	<b><u>172</u></b>	55.0	171	54.5	173	<b><u>54.7</u></b>	<b><u>172</u></b>	55.0	171	54.5	173
444.namd	<b><u>500</u></b>	<b><u>16.1</u></b>	500	16.1	500	16.1	486	16.5	486	16.5	<b><u>486</u></b>	<b><u>16.5</u></b>
447.dealII	358	32.0	<b><u>358</u></b>	<b><u>32.0</u></b>	364	31.4	358	32.0	<b><u>358</u></b>	<b><u>32.0</u></b>	364	31.4
450.soplex	347	24.0	348	24.0	<b><u>348</u></b>	<b><u>24.0</u></b>	347	24.0	348	24.0	<b><u>348</u></b>	<b><u>24.0</u></b>
453.povray	<b><u>166</u></b>	<b><u>32.1</u></b>	165	32.2	167	31.8	147	36.2	149	35.7	<b><u>147</u></b>	<b><u>36.1</u></b>
454.calculix	<b><u>258</u></b>	<b><u>32.0</u></b>	258	32.0	258	32.0	246	33.6	<b><u>246</u></b>	<b><u>33.6</u></b>	246	33.6
459.GemsFDTD	71.5	148	<b><u>72.5</u></b>	<b><u>146</u></b>	72.6	146	62.9	169	61.4	173	<b><u>62.4</u></b>	<b><u>170</u></b>
465.tonto	376	26.2	377	26.1	<b><u>377</u></b>	<b><u>26.1</u></b>	326	30.2	327	30.1	<b><u>326</u></b>	<b><u>30.2</u></b>
470.lbm	<b><u>31.9</u></b>	<b><u>431</u></b>	31.6	434	31.9	430	<b><u>31.9</u></b>	<b><u>431</u></b>	31.6	434	31.9	430
481.wrf	<b><u>178</u></b>	<b><u>62.7</u></b>	178	62.9	179	62.2	<b><u>178</u></b>	<b><u>62.7</u></b>	178	62.9	179	62.2
482.sphinx3	<b><u>402</u></b>	<b><u>48.4</u></b>	402	48.5	403	48.4	<b><u>402</u></b>	<b><u>48.4</u></b>	402	48.5	403	48.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core State set to C6 State  
Minimum Processor Idle Power Package State set to No Package State  
QPI Snoop Configuration set to Home Snoop  
Thermal Configuration set to Maximum Cooling

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp2006 = 66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

**SPECfp\_base2006 = 63.9**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

### Platform Notes (Continued)

Collaborative Power Control set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Double Refresh Rate set to 1x Refresh

Sysinfo program /cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on R112-BAO-DL380-Gen9VP2 Fri Oct 31 14:23:15 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263847236 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux R112-BAO-DL380-Gen9VP2 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 31 14:15

SPEC is set to: /cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

**SPECfp\_base2006 = 63.9**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

/dev/sda4 ext4 362G 203G 141G 60% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P89 07/11/2014

Memory:

2x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
14x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have two lines reading as:

2x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
14x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"  
OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

**SPECfp\_base2006 = 63.9**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

**SPECfp\_base2006 = 63.9**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 66.0**

ProLiant DL380 Gen9  
(1.90 GHz, Intel Xeon E5-2609 v3)

**SPECfp\_base2006 = 63.9**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:35:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 November 2014.