SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M4 (Intel Xeon E5-2680 v3)

SPECfp®_rate2006 = 808

SPECfp_rate_base2006 = 785

CPU2006 license: 3358
Test sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

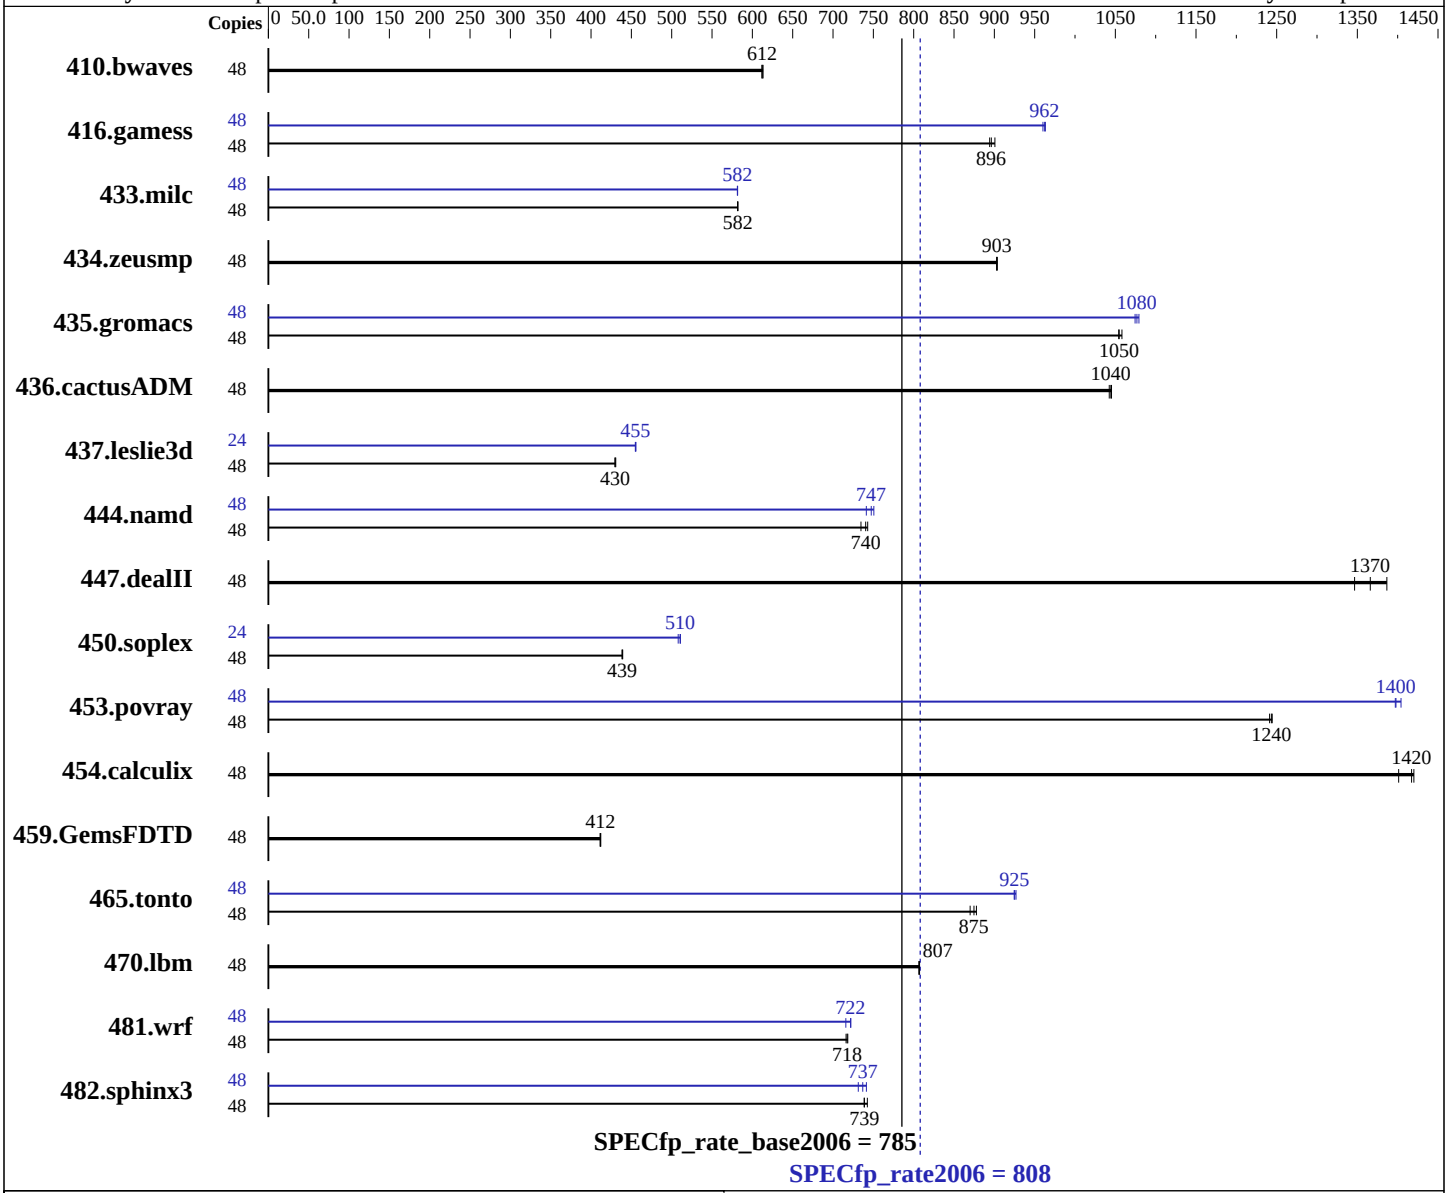

Hardware

CPU Name:	Intel Xeon E5-2680 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M4 (Intel Xeon E5-2680 v3)

SPECfp_rate2006 = 808

SPECfp_rate_base2006 = 785

CPU2006 license: 3358
Test sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 450 GB SATA SSD
Other Hardware: None

System State: Run level 5
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1066	612	1064	613	**1065**	**612**	48	1066	612	1064	613	**1065**	**612**
416.gamess	48	**1049**	**896**	1043	901	1051	894	48	976	963	979	960	**977**	**962**
433.milc	48	757	582	**757**	**582**	757	582	48	758	581	**758**	**582**	757	582
434.zeusmp	48	483	904	484	903	**484**	**903**	48	483	904	484	903	**484**	**903**
435.gromacs	48	**325**	**1050**	325	1050	324	1060	48	318	1080	319	1070	**318**	**1080**
436.cactusADM	48	550	1040	549	1050	**549**	**1040**	48	550	1040	549	1050	**549**	**1040**
437.leslie3d	48	**1049**	**430**	1048	431	1050	430	24	495	456	**496**	**455**	496	455
444.namd	48	518	743	**520**	**740**	524	735	48	519	741	**515**	**747**	513	751
447.dealII	48	**402**	**1370**	396	1390	408	1350	48	**402**	**1370**	396	1390	408	1350
450.soplex	48	911	439	**913**	**439**	913	439	24	392	511	394	508	**392**	**510**
453.povray	48	205	1240	206	1240	**205**	**1240**	48	182	1400	183	1400	**183**	**1400**
454.calculix	48	**279**	**1420**	279	1420	283	1400	48	**279**	**1420**	279	1420	283	1400
459.GemsFDTD	48	1236	412	**1237**	**412**	1239	411	48	1236	412	**1237**	**412**	1239	411
465.tonto	48	**540**	**875**	543	870	538	878	48	510	927	511	925	**511**	**925**
470.lbm	48	**818**	**807**	817	807	818	807	48	**818**	**807**	817	807	818	807
481.wrf	48	**747**	**718**	749	716	746	718	48	749	716	**743**	**722**	743	722
482.sphinx3	48	1260	743	**1266**	**739**	1267	739	48	1279	731	**1270**	**737**	1262	741

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Hardware prefetch set to "Enabled"
Intel Turbo boost Technology set to "Enabled"
Intel Hyper Threading Technology set to "Enabled"
```

Continued on next page

Platform Notes (Continued)

```
VT Support set to "Disabled"
Memory Frequency set to "2133"
SET SCALING_GOVERNOR environment variable to "performance"
 Sysinfo program /home/CPU2006/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on localhost.localdomain Thu Mar  5 09:22:12 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
       2 "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 6
       siblings  : 12
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
    cache size : 15360 KB

 From /proc/meminfo
    MemTotal:       263857896 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.0 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="7.0"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
       ANSI_COLOR="0;31"
       CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
    redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
    EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Mar 4 22:26

 SPEC is set to: /home/CPU2006
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   393G   55G  339G  14% /home
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 4.0.6 12/30/2014
   Memory:
    8x NO DIMM NO DIMM
    16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1 >       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 24 17:18:39 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2015.