



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

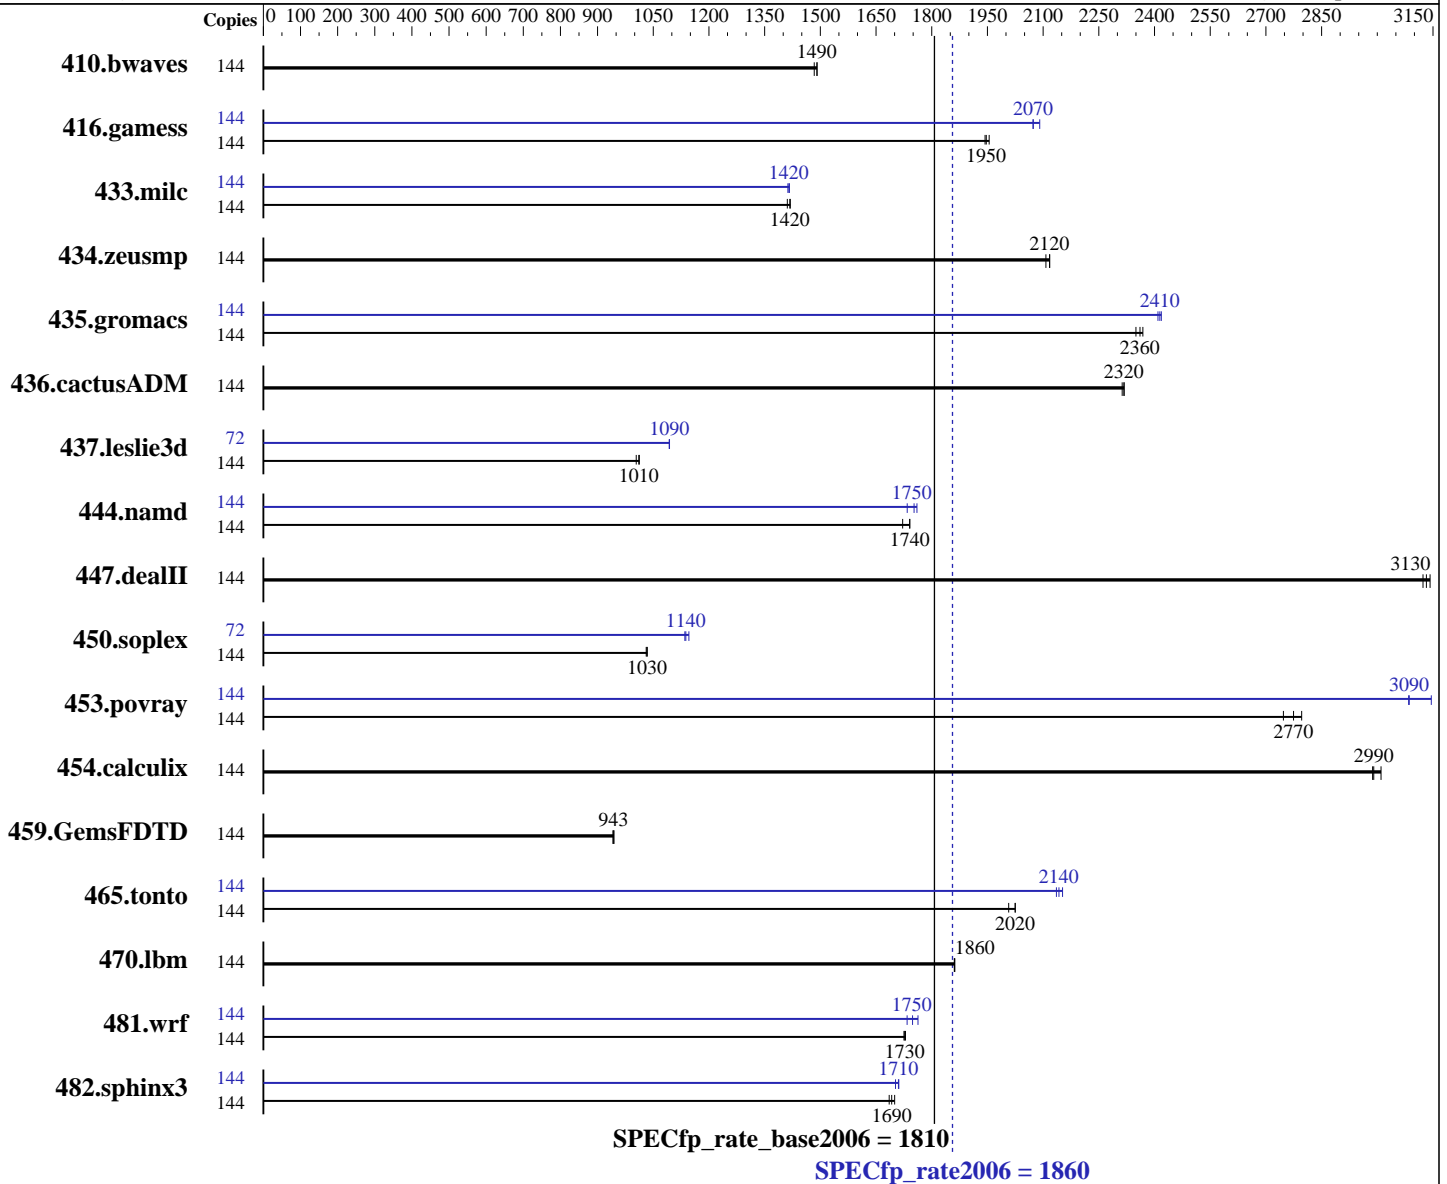

### Hardware

CPU Name: Intel Xeon E7-8880L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	144	1319	1480	1313	1490	<b>1313</b>	<b>1490</b>	144	1319	1480	1313	1490	<b>1313</b>	<b>1490</b>		
416.gamess	144	1442	1950	1451	1940	<b>1448</b>	<b>1950</b>	144	1349	2090	1360	2070	<b>1360</b>	<b>2070</b>		
433.milc	144	932	1420	937	1410	<b>932</b>	<b>1420</b>	144	933	1420	936	1410	<b>934</b>	<b>1420</b>		
434.zeusmp	144	619	2120	622	2110	<b>619</b>	<b>2120</b>	144	619	2120	622	2110	<b>619</b>	<b>2120</b>		
435.gromacs	144	434	2370	<b>435</b>	<b>2360</b>	438	2350	144	<b>426</b>	<b>2410</b>	427	2410	425	2420		
436.cactusADM	144	<b>742</b>	<b>2320</b>	744	2310	742	2320	144	<b>742</b>	<b>2320</b>	744	2310	742	2320		
437.leslie3d	144	1348	1000	1337	1010	<b>1339</b>	<b>1010</b>	72	<b>619</b>	<b>1090</b>	619	1090	619	1090		
444.namd	144	<b>663</b>	<b>1740</b>	663	1740	671	1720	144	<b>659</b>	<b>1750</b>	656	1760	666	1730		
447.dealII	144	527	3120	<b>526</b>	<b>3130</b>	524	3140	144	527	3120	<b>526</b>	<b>3130</b>	524	3140		
450.soplex	144	1165	1030	<b>1162</b>	<b>1030</b>	1162	1030	72	529	1140	<b>528</b>	<b>1140</b>	524	1150		
453.povray	144	274	2800	<b>276</b>	<b>2770</b>	279	2750	144	248	3080	<b>248</b>	<b>3090</b>	244	3150		
454.calculix	144	395	3010	<b>397</b>	<b>2990</b>	398	2990	144	395	3010	<b>397</b>	<b>2990</b>	398	2990		
459.GemsFDTD	144	1618	944	1623	941	<b>1620</b>	<b>943</b>	144	1618	944	1623	941	<b>1620</b>	<b>943</b>		
465.tonto	144	700	2020	<b>700</b>	<b>2020</b>	706	2010	144	658	2150	<b>661</b>	<b>2140</b>	663	2140		
470.lbm	144	1063	1860	<b>1063</b>	<b>1860</b>	1063	1860	144	1063	1860	<b>1063</b>	<b>1860</b>	1063	1860		
481.wrf	144	932	1730	<b>931</b>	<b>1730</b>	930	1730	144	912	1760	<b>920</b>	<b>1750</b>	928	1730		
482.sphinx3	144	1651	1700	<b>1659</b>	<b>1690</b>	1665	1690	144	<b>1641</b>	<b>1710</b>	1649	1700	1640	1710		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Set Lock\_step to disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

### Platform Notes (Continued)

Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Tue Jul 28 00:52:05 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-8880L v3 @ 2.00GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 18
siblings       : 36
physical 0:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size     : 46080 KB
```

From /proc/meminfo

```
MemTotal:      528012884 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 27 09:42

SPEC is set to: /spec

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        xfs       440G  260G  180G  60% /
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISZ015 06/09/2015

Memory:

32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1860

Huawei CH242 V3 (Intel Xeon E7-8880L v3)

SPECfp\_rate\_base2006 = 1810

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 25 17:52:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 August 2015.