



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp<sup>®</sup>2006 = **95.0**

SPECfp\_base2006 = **92.8**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

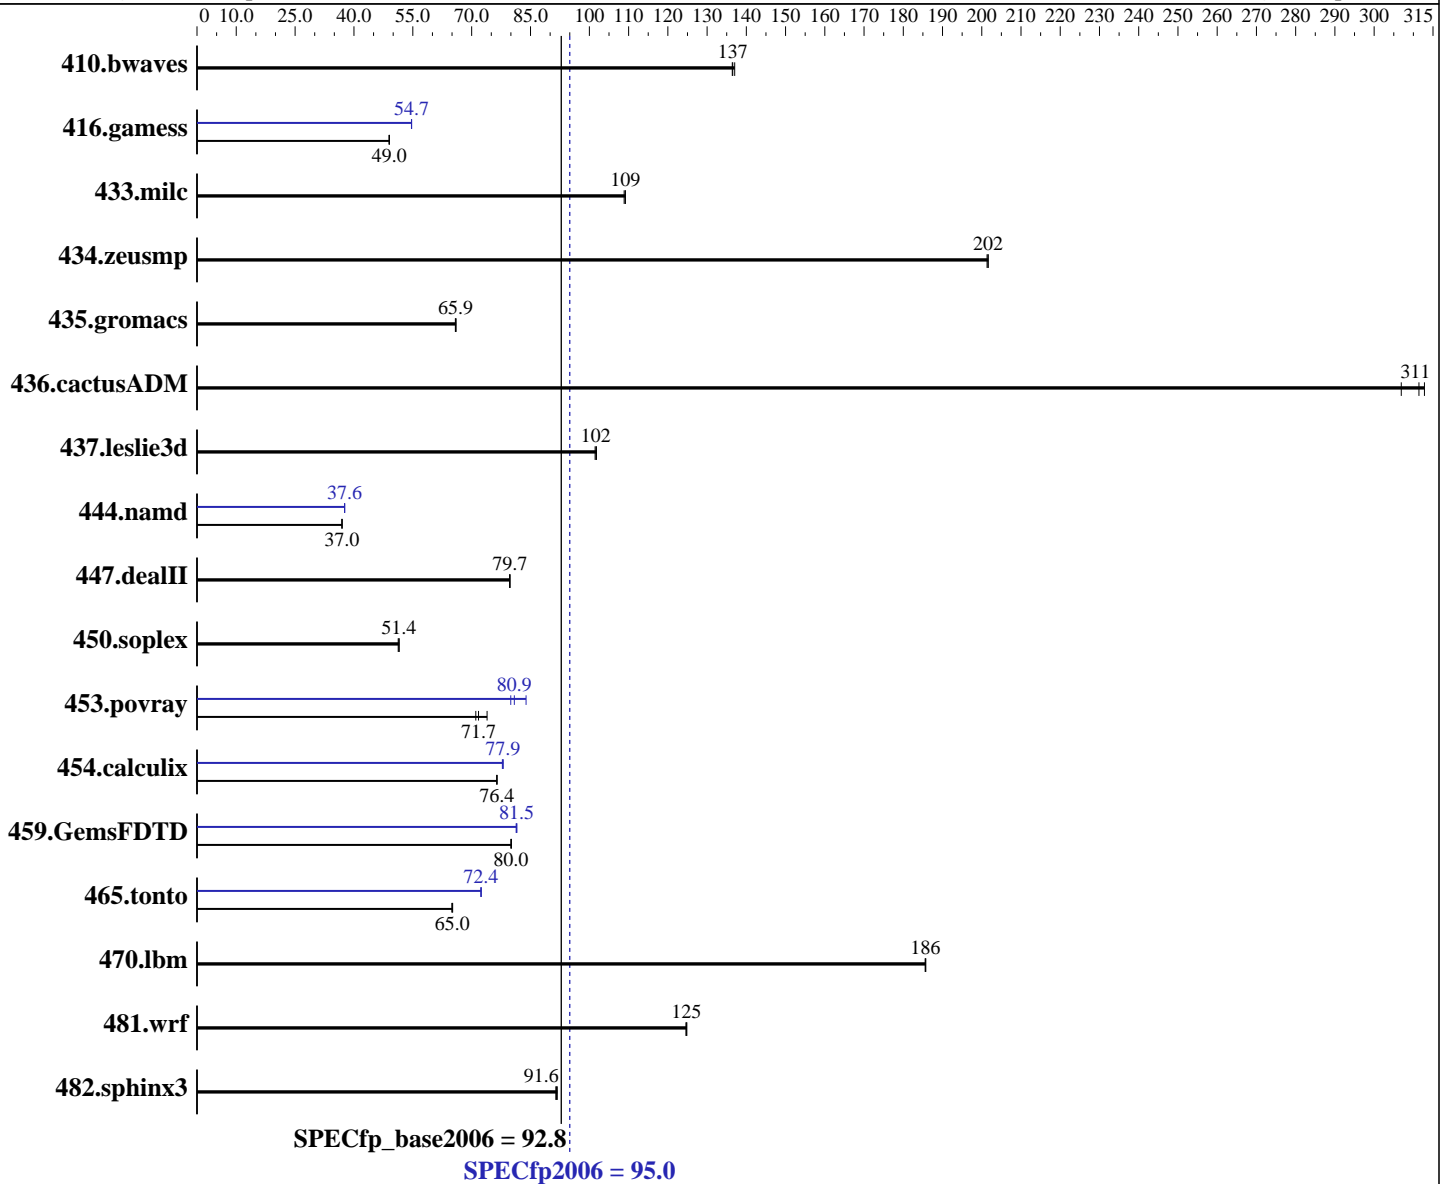

### Hardware

CPU Name: Intel Core i5-6600  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp2006 = **95.0**

SPECfp\_base2006 = **92.8**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	99.2	137	99.6	136	<b>99.5</b>	<b>137</b>	99.2	137	99.6	136	<b>99.5</b>	<b>137</b>
416.gamess	400	48.9	<b>399</b>	<b>49.0</b>	399	49.0	<b>358</b>	<b>54.7</b>	358	54.7	358	54.7
433.milc	84.1	109	84.3	109	<b>84.1</b>	<b>109</b>	84.1	109	84.3	109	<b>84.1</b>	<b>109</b>
434.zeusmp	45.1	202	<b>45.1</b>	<b>202</b>	45.2	201	45.1	202	<b>45.1</b>	<b>202</b>	45.2	201
435.gromacs	<b>108</b>	<b>65.9</b>	108	66.0	108	65.8	<b>108</b>	<b>65.9</b>	108	66.0	108	65.8
436.cactusADM	<b>38.4</b>	<b>311</b>	38.2	313	38.9	307	<b>38.4</b>	<b>311</b>	38.2	313	38.9	307
437.leslie3d	92.3	102	92.6	101	<b>92.4</b>	<b>102</b>	92.3	102	92.6	101	<b>92.4</b>	<b>102</b>
444.namd	217	37.0	217	36.9	<b>217</b>	<b>37.0</b>	213	37.6	213	37.6	<b>213</b>	<b>37.6</b>
447.dealII	144	79.7	143	79.8	<b>143</b>	<b>79.7</b>	144	79.7	143	79.8	<b>143</b>	<b>79.7</b>
450.soplex	163	51.3	<b>162</b>	<b>51.4</b>	162	51.5	163	51.3	<b>162</b>	<b>51.4</b>	162	51.5
453.povray	72.0	73.9	<b>74.2</b>	<b>71.7</b>	74.9	71.1	<b>65.8</b>	<b>80.9</b>	63.4	83.9	66.5	80.0
454.calculix	108	76.5	108	76.4	<b>108</b>	<b>76.4</b>	106	78.0	<b>106</b>	<b>77.9</b>	106	77.8
459.GemsFDTD	133	80.0	132	80.1	<b>133</b>	<b>80.0</b>	130	81.3	<b>130</b>	<b>81.5</b>	130	81.5
465.tonto	<b>151</b>	<b>65.0</b>	151	65.2	151	65.0	136	72.4	136	72.4	<b>136</b>	<b>72.4</b>
470.lbm	74.0	186	74.0	186	<b>74.0</b>	<b>186</b>	74.0	186	74.0	186	<b>74.0</b>	<b>186</b>
481.wrf	89.5	125	<b>89.5</b>	<b>125</b>	89.6	125	89.5	125	<b>89.5</b>	<b>125</b>	89.6	125
482.sphinx3	<b>213</b>	<b>91.6</b>	212	91.8	213	91.5	<b>213</b>	<b>91.6</b>	212	91.8	213	91.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Thu Nov 26 07:39:47 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Core(TM) i5-6600 CPU @ 3.30GHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp2006 = 95.0

SPECfp\_base2006 = 92.8

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

```

1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 6144 KB

From /proc/meminfo
MemTotal:      65581704 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 26 03:17

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   850G  7.1G  843G   1% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 11/09/2015
Memory:
4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp2006 = 95.0

SPECfp\_base2006 = 92.8

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB  
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp2006 = 95.0

SPECfp\_base2006 = 92.8

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

SPECfp2006 = 95.0

SPECfp\_base2006 = 92.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Core i5-6600)

**SPECfp2006 = 95.0**

**SPECfp\_base2006 = 92.8**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 16 10:40:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 December 2015.