



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp®2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

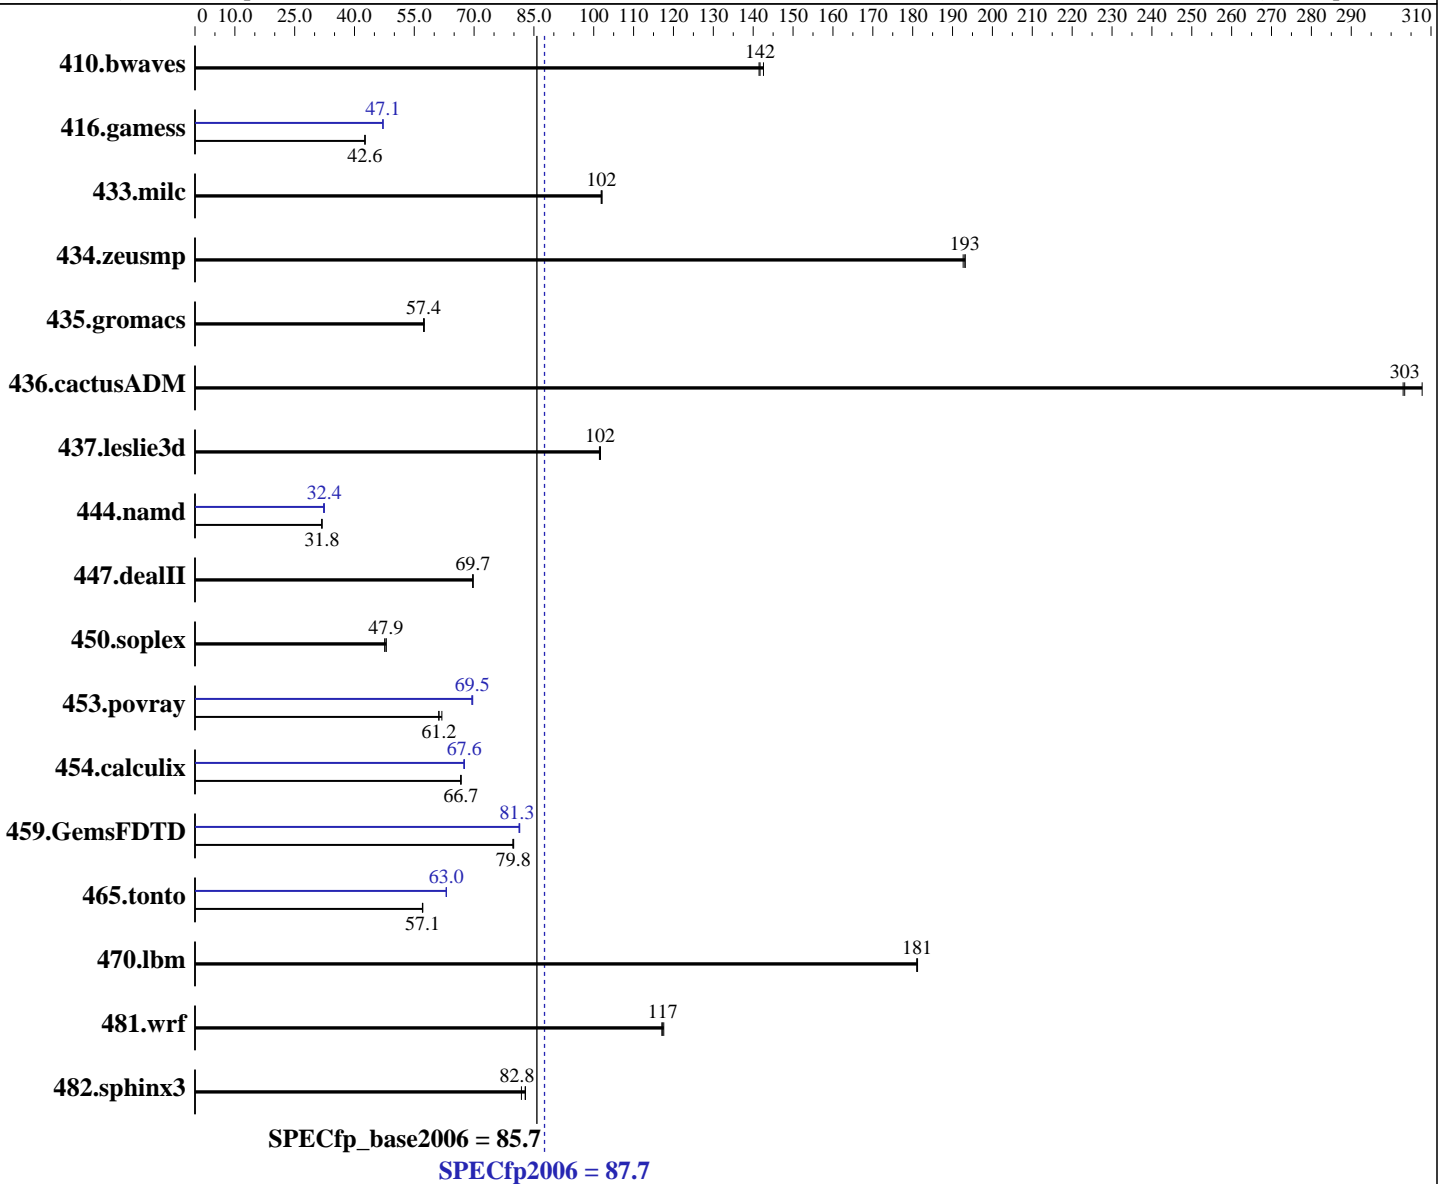

### Hardware

CPU Name: Intel Core i5-6400  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = **87.7**

SPECfp\_base2006 = **85.7**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 1Rx8 PC4-2800R-U, running at 2133 MHz)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

| Benchmark     | Base        |             |             |             |             |             | Peak        |             |             |             |             |             |
|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|               | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 410.bwaves    | 96.1        | 141         | 95.3        | 143         | <b>95.9</b> | <b>142</b>  | 96.1        | 141         | 95.3        | 143         | <b>95.9</b> | <b>142</b>  |
| 416.gamess    | 459         | 42.7        | 459         | 42.6        | <b>459</b>  | <b>42.6</b> | <b>415</b>  | <b>47.1</b> | 415         | 47.1        | 415         | 47.2        |
| 433.milc      | 90.1        | 102         | 89.9        | 102         | <b>90.0</b> | <b>102</b>  | 90.1        | 102         | 89.9        | 102         | <b>90.0</b> | <b>102</b>  |
| 434.zeusmp    | 47.2        | 193         | 47.1        | 193         | <b>47.1</b> | <b>193</b>  | 47.2        | 193         | 47.1        | 193         | <b>47.1</b> | <b>193</b>  |
| 435.gromacs   | 124         | 57.5        | <b>124</b>  | <b>57.4</b> | 125         | 57.3        | 124         | 57.5        | <b>124</b>  | <b>57.4</b> | 125         | 57.3        |
| 436.cactusADM | <b>39.4</b> | <b>303</b>  | 38.8        | 308         | 39.4        | 303         | <b>39.4</b> | <b>303</b>  | 38.8        | 308         | 39.4        | 303         |
| 437.leslie3d  | 92.4        | 102         | <b>92.5</b> | <b>102</b>  | 92.7        | 101         | 92.4        | 102         | <b>92.5</b> | <b>102</b>  | 92.7        | 101         |
| 444.namd      | 252         | 31.8        | 252         | 31.9        | <b>252</b>  | <b>31.8</b> | <b>247</b>  | <b>32.4</b> | 247         | 32.4        | 249         | 32.3        |
| 447.dealII    | 164         | 69.6        | <b>164</b>  | <b>69.7</b> | 164         | 69.8        | 164         | 69.6        | <b>164</b>  | <b>69.7</b> | 164         | 69.8        |
| 450.soplex    | <b>174</b>  | <b>47.9</b> | 175         | 47.6        | 174         | 47.9        | <b>174</b>  | <b>47.9</b> | 175         | 47.6        | 174         | 47.9        |
| 453.povray    | <b>86.9</b> | <b>61.2</b> | 85.9        | 61.9        | 87.0        | 61.1        | 76.6        | 69.4        | <b>76.5</b> | <b>69.5</b> | 76.4        | 69.7        |
| 454.calculix  | 124         | 66.6        | 124         | 66.8        | <b>124</b>  | <b>66.7</b> | 122         | 67.4        | 122         | 67.6        | <b>122</b>  | <b>67.6</b> |
| 459.GemsFDTD  | 133         | 79.9        | <b>133</b>  | <b>79.8</b> | 133         | 79.7        | <b>130</b>  | <b>81.3</b> | 130         | 81.3        | 130         | 81.4        |
| 465.tonto     | 172         | 57.1        | 173         | 57.0        | <b>172</b>  | <b>57.1</b> | 156         | 63.1        | <b>156</b>  | <b>63.0</b> | 156         | 63.0        |
| 470.lbm       | 75.9        | 181         | 75.8        | 181         | <b>75.9</b> | <b>181</b>  | 75.9        | 181         | 75.8        | 181         | <b>75.9</b> | <b>181</b>  |
| 481.wrf       | <b>95.2</b> | <b>117</b>  | 95.0        | 118         | 95.4        | 117         | <b>95.2</b> | <b>117</b>  | 95.0        | 118         | 95.4        | 117         |
| 482.sphinx3   | 238         | 81.9        | <b>235</b>  | <b>82.8</b> | 235         | 82.9        | 238         | 81.9        | <b>235</b>  | <b>82.8</b> | 235         | 82.9        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

As tested, the system used a Supermicro CSE-743TQ-1200B-SQ chassis. The chassis is configured with a PWS-1K25P-PQ power supply, 1 SNK-P0051AP4 heatsink, as well as 1 FAN-0103L4 rear fan and 2 FAN-0104L4 chassis fan. Sysinfo program /usr/cpu2006/config/sysinfo.rev6914 \$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1 running on C7Z170-01 Fri Jan 1 06:35:44 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

### Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Core(TM) i5-6400 CPU @ 2.70GHz
1 "physical id"s (chips)
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
cache size : 6144 KB
```

From /proc/meminfo

```
MemTotal: 16206808 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux C7Z170-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 1 01:43

SPEC is set to: /usr/cpu2006

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 183G 32G 151G 18% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 12/14/2015

Memory:

```
4x 0420 F4-2800C16-4GRK 4 GB 1 rank 2133 MHz
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-OCE motherboard  
(C7Z170-OCE , Intel Core i5-6400)

SPECfp2006 = 87.7

SPECfp\_base2006 = 85.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 26 15:11:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 January 2016.