



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®\_rate2006 = 361**

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate\_base2006 = 353**

**CPU2006 license:** 9006


**Test date:** Apr-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

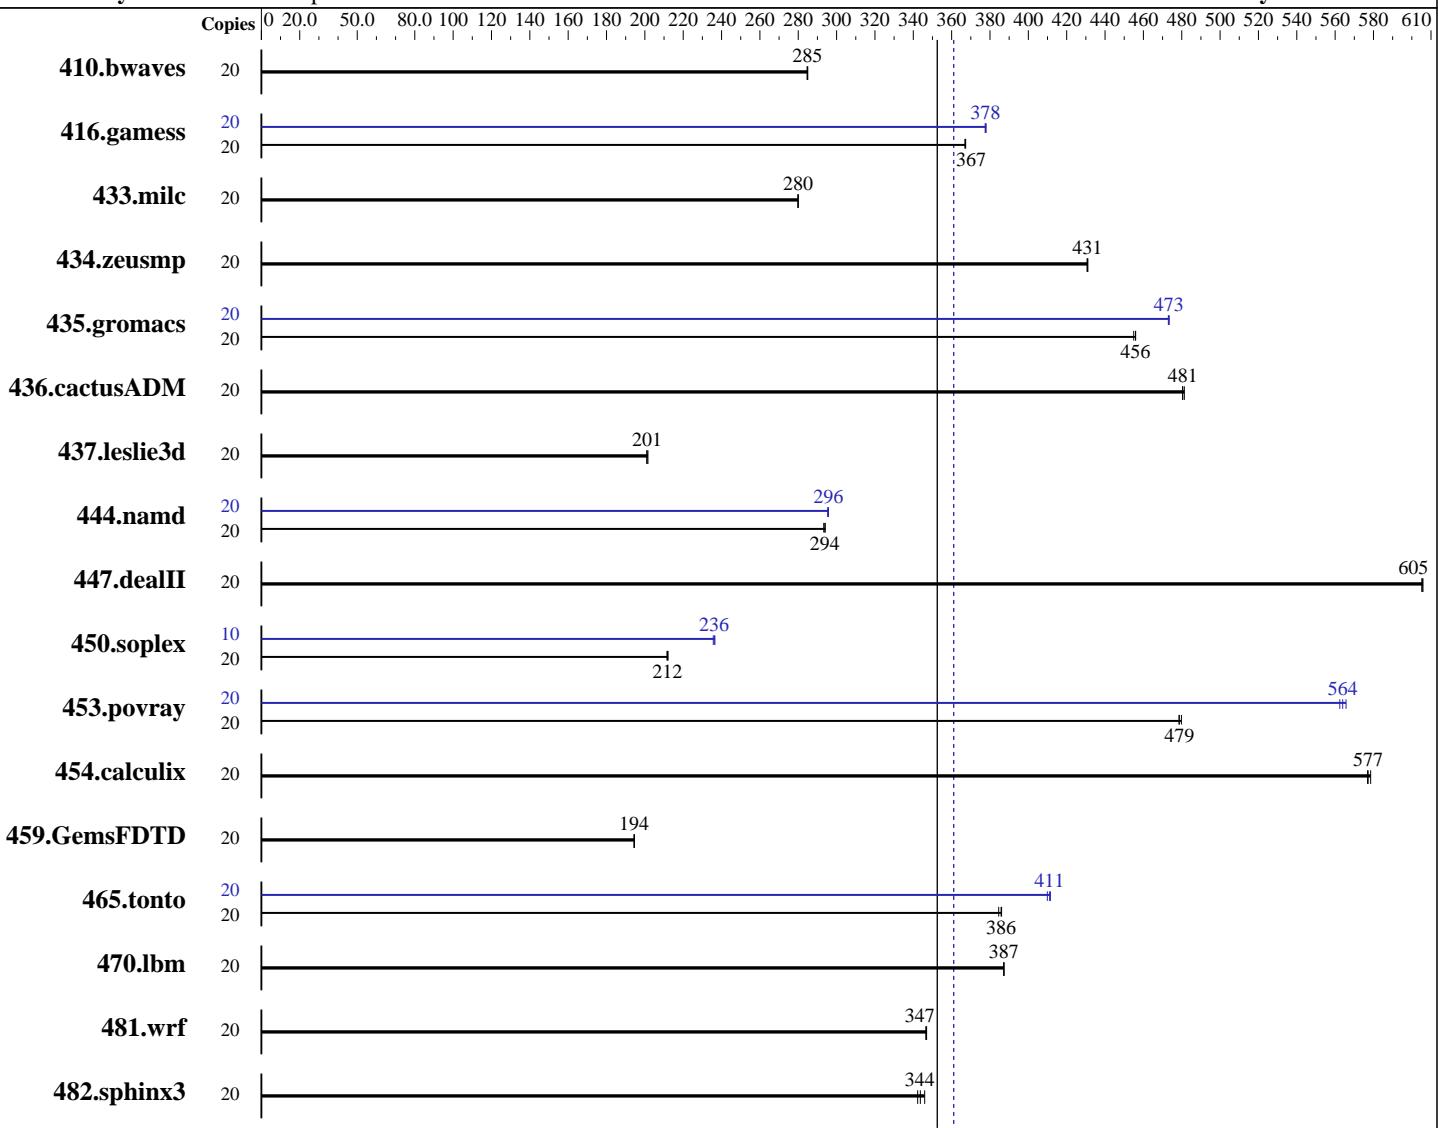

**SPECfp\_rate\_base2006 = 353**

**SPECfp\_rate2006 = 361**

## Hardware

CPU Name: Intel Xeon E5-2640 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 10 cores, 1 chip, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: Kernel 3.10.0-327.4.5.el7.x86\_64  
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 No ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate2006 = 361**

**SPECfp\_rate\_base2006 = 353**

**CPU2006 license:** 9006

**Test date:** Apr-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	20	<b>954</b>	<b>285</b>	954	285	955	285	20	<b>954</b>	<b>285</b>	954	285	955	285	955	285
416.gamess	20	1066	367	<b>1067</b>	<b>367</b>	1067	367	20	1037	377	<b>1037</b>	<b>378</b>	1036	378		
433.milc	20	656	280	<b>656</b>	<b>280</b>	656	280	20	<b>656</b>	<b>280</b>	<b>656</b>	<b>280</b>	656	280		
434.zeusmp	20	422	431	423	431	<b>422</b>	<b>431</b>	20	422	431	423	431	<b>422</b>	<b>431</b>		
435.gromacs	20	<b>313</b>	<b>456</b>	313	456	314	455	20	<b>302</b>	<b>473</b>	302	473	302	473		
436.cactusADM	20	497	481	497	480	<b>497</b>	<b>481</b>	20	497	481	497	480	<b>497</b>	<b>481</b>		
437.leslie3d	20	<b>935</b>	<b>201</b>	933	202	935	201	20	<b>935</b>	<b>201</b>	933	202	935	201		
444.namd	20	545	294	<b>546</b>	<b>294</b>	547	293	20	<b>542</b>	<b>296</b>	542	296	543	295		
447.dealII	20	378	606	<b>378</b>	<b>605</b>	378	605	20	378	606	<b>378</b>	<b>605</b>	378	605		
450.soplex	20	<b>788</b>	<b>212</b>	786	212	789	212	10	<b>353</b>	<b>236</b>	354	236	353	237		
453.povray	20	222	479	<b>222</b>	<b>479</b>	222	480	20	<b>189</b>	<b>564</b>	188	566	189	562		
454.calculix	20	286	577	<b>286</b>	<b>577</b>	285	579	20	286	577	<b>286</b>	<b>577</b>	285	579		
459.GemsFDTD	20	1091	194	1091	194	<b>1091</b>	<b>194</b>	20	1091	194	1091	194	<b>1091</b>	<b>194</b>		
465.tonto	20	<b>510</b>	<b>386</b>	510	386	512	385	20	480	410	<b>479</b>	<b>411</b>	478	412		
470.lbm	20	<b>710</b>	<b>387</b>	710	387	710	387	20	<b>710</b>	<b>387</b>	710	387	710	387		
481.wrf	20	644	347	<b>644</b>	<b>347</b>	645	347	20	644	347	<b>644</b>	<b>347</b>	645	347		
482.sphinx3	20	1139	342	<b>1134</b>	<b>344</b>	1127	346	20	1139	342	<b>1134</b>	<b>344</b>	1127	346		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate2006 = 361**

**SPECfp\_rate\_base2006 = 353**

**CPU2006 license:** 9006

**Test date:** Apr-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

The Express5800/R120g-1M (Intel Xeon E5-2640 v4) and the Express5800/R120g-2M (Intel Xeon E5-2640 v4) models are electronically equivalent. The results have been measured on the Express5800/R120g-2M (Intel Xeon E5-2640 v4) model.

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate2006 = 361**

**SPECfp\_rate\_base2006 = 353**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate2006 = 361**

**SPECfp\_rate\_base2006 = 353**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2M (Intel Xeon E5-2640 v4)

**SPECfp\_rate2006 = 361**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:08:57 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.