



SPEC[®] CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

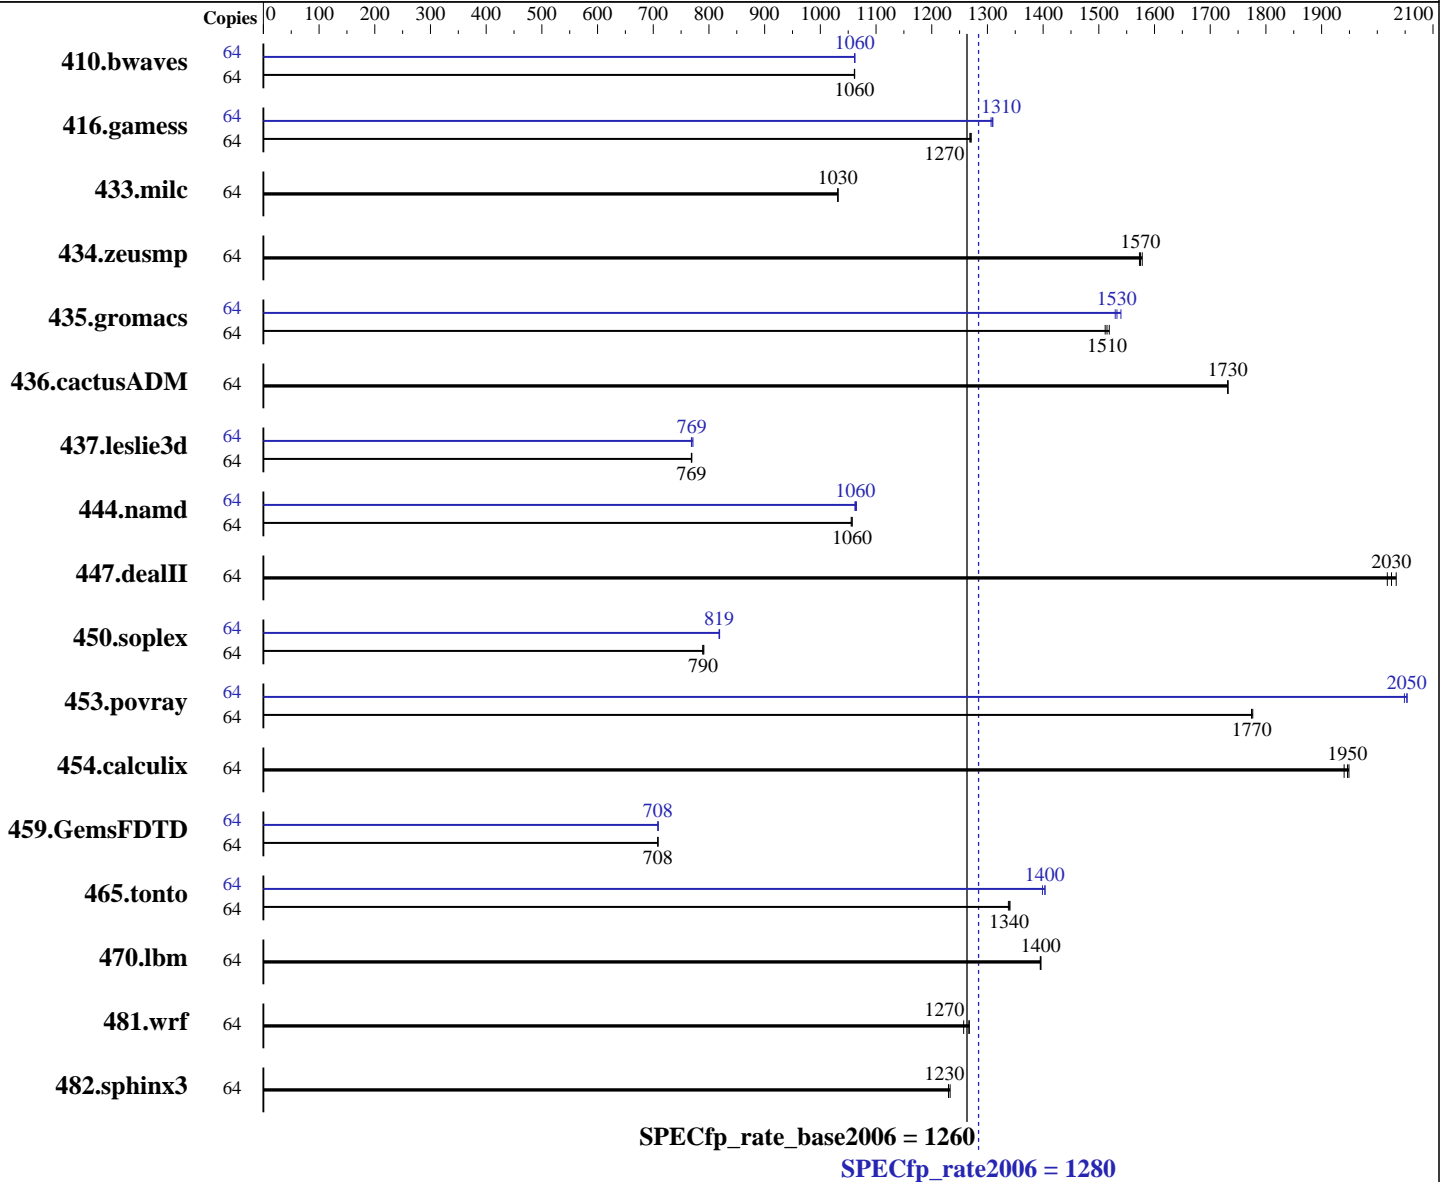

Hardware

CPU Name: Intel Xeon Gold 6130
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

L3 Cache: 22 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	820	1060	819	1060	820	1060	64	819	1060	819	1060	819	1060
416.gamess	64	987	1270	986	1270	988	1270	64	959	1310	957	1310	957	1310
433.milc	64	570	1030	570	1030	570	1030	64	570	1030	570	1030	570	1030
434.zeusmp	64	370	1570	370	1570	369	1580	64	370	1570	370	1570	369	1580
435.gromacs	64	302	1510	301	1520	302	1510	64	298	1530	299	1530	297	1540
436.cactusADM	64	442	1730	442	1730	442	1730	64	442	1730	442	1730	442	1730
437.leslie3d	64	782	769	783	769	783	769	64	783	769	780	771	782	769
444.namd	64	486	1060	486	1060	486	1060	64	483	1060	483	1060	482	1060
447.dealII	64	360	2030	361	2030	363	2020	64	360	2030	361	2030	363	2020
450.soplex	64	677	789	675	791	676	790	64	652	819	652	818	652	819
453.povray	64	192	1780	192	1770	192	1770	64	166	2050	166	2050	166	2050
454.calculix	64	271	1950	272	1940	271	1950	64	271	1950	272	1940	271	1950
459.GemsFDTD	64	959	708	959	708	959	708	64	958	708	959	708	958	709
465.tonto	64	471	1340	470	1340	470	1340	64	449	1400	450	1400	449	1400
470.lbm	64	630	1390	630	1400	630	1400	64	630	1390	630	1400	630	1400
481.wrf	64	564	1270	569	1260	564	1270	64	564	1270	569	1260	564	1270
482.sphinx3	64	1014	1230	1012	1230	1014	1230	64	1014	1230	1012	1230	1014	1230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Power Efficiency Mode Set to Performance
SNC Set to Enable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

Platform Notes (Continued)

IMC Interleaving Set to 1 way
Patrol Scrub Set to Disable
Sysinfo program /spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Thu Nov 30 03:00:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 16
  siblings     : 32
  physical 0   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size     : 22528 KB
```

```
From /proc/meminfo
MemTotal:      394144360 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 19 22:43
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  689G  130G  525G  20% /
```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.31 09/29/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175

Test date: Nov-2017

Test sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1280

Huawei 1288H V5 (Intel Xeon Gold 6130)

SPECfp_rate_base2006 = 1260

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 10 12:32:40 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 January 2018.