SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8256)

SPECspeed2017_fp_base = 57.8

SPECspeed2017_fp_peak = 58.4

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Nov-2018

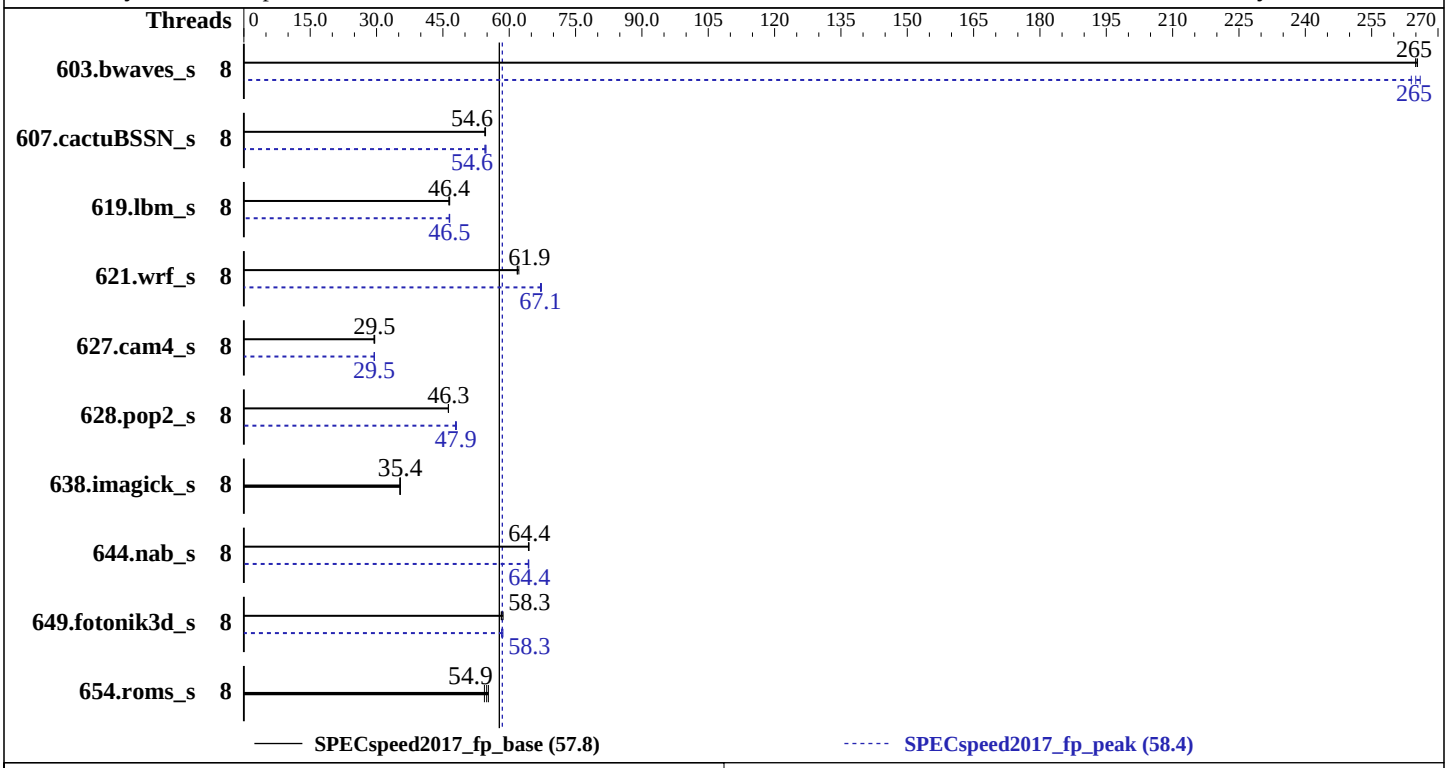

Hardware

CPU Name:	Intel Xeon Platinum 8256
Max MHz.:	3900
Nominal:	3800
Enabled:	8 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	16.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 200 GB SATA III SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server 7.6 (Maipo) Kernel 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Version 3.0b released Mar-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8256)

SPECspeed2017_fp_base = 57.8

SPECspeed2017_fp_peak = 58.4

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Nov-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	8	**223**	**265**	223	265	222	265	8	222	266	**223**	**265**	224	264
607.cactuBSSN_s	8	305	54.6	306	54.5	**305**	**54.6**	8	**305**	**54.6**	306	54.5	304	54.8
619.lbm_s	8	113	46.5	**113**	**46.4**	113	46.4	8	113	46.5	113	46.4	**113**	**46.5**
621.wrf_s	8	213	62.2	214	61.8	**214**	**61.9**	8	**197**	**67.1**	197	67.1	197	67.3
627.cam4_s	8	300	29.6	301	29.4	**300**	**29.5**	8	**301**	**29.5**	301	29.5	300	29.5
628.pop2_s	8	**257**	**46.3**	257	46.2	257	46.3	8	248	47.9	**248**	**47.9**	247	48.1
638.imagick_s	8	**408**	**35.4**	408	35.4	409	35.3	8	**408**	**35.4**	408	35.4	409	35.3
644.nab_s	8	272	64.3	271	64.4	**271**	**64.4**	8	271	64.4	**271**	**64.4**	272	64.3
649.fotonik3d_s	8	156	58.6	**156**	**58.3**	157	58.2	8	156	58.3	156	58.6	**156**	**58.3**
654.roms_s	8	289	54.4	285	55.3	**287**	**54.9**	8	289	54.4	285	55.3	**287**	**54.9**

SPECspeed2017_fp_base = 57.8

SPECspeed2017_fp_peak = 58.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Hyper-Threading = Disable
```

(Continued on next page)

Platform Notes (Continued)

```
LLC prefetch = Disable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Disable
Stale AtoS = Disable
LLC dead line alloc = Enable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on CPU2017-01 Sun Mar 31 12:33:35 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
      2  "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 5 8 9 13
      physical 1: cores 1 2 5 13

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                8
     On-line CPU(s) list:   0-7
     Thread(s) per core:    1
     Core(s) per socket:    4
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
     Stepping:              6
     CPU MHz:               3800.000
     BogoMIPS:              7600.00
```

(Continued on next page)

Platform Notes (Continued)

```
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              16896K
      NUMA node0 CPU(s):     0-3
      NUMA node1 CPU(s):     4-7
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
      intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts hwp_epp pku ospke avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 16896 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3
    node 0 size: 391838 MB
    node 0 free: 381287 MB
    node 1 cpus: 4 5 6 7
    node 1 size: 393216 MB
    node 1 free: 378841 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       791182400 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.6 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
```

(Continued on next page)

Platform Notes (Continued)

```
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.6"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

 uname -a:
    Linux CPU2017-01 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS

 run-level 3 Mar 31 07:32

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb2      xfs   185G   28G  157G  15% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 3.0b 03/04/2019
   Memory:
    24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   603.bwaves_s(peak) 649.fotonik3d_s(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   621.wrf_s(peak) 628.pop2_s(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

Fortran benchmarks:
`-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs`

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs`

Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

638.imagick_s: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

644.nab_s: Same as 619.lbm_s

Fortran benchmarks:

603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-31 00:33:34-0400.
Report generated on 2019-04-16 17:19:04 by CPU2017 PS formatter v6067.
Originally published on 2019-04-16.