



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECSpeed®2017_int_base = 5.77

SPECSpeed®2017_int_peak = 6.09

CPU2017 License: 9006


Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

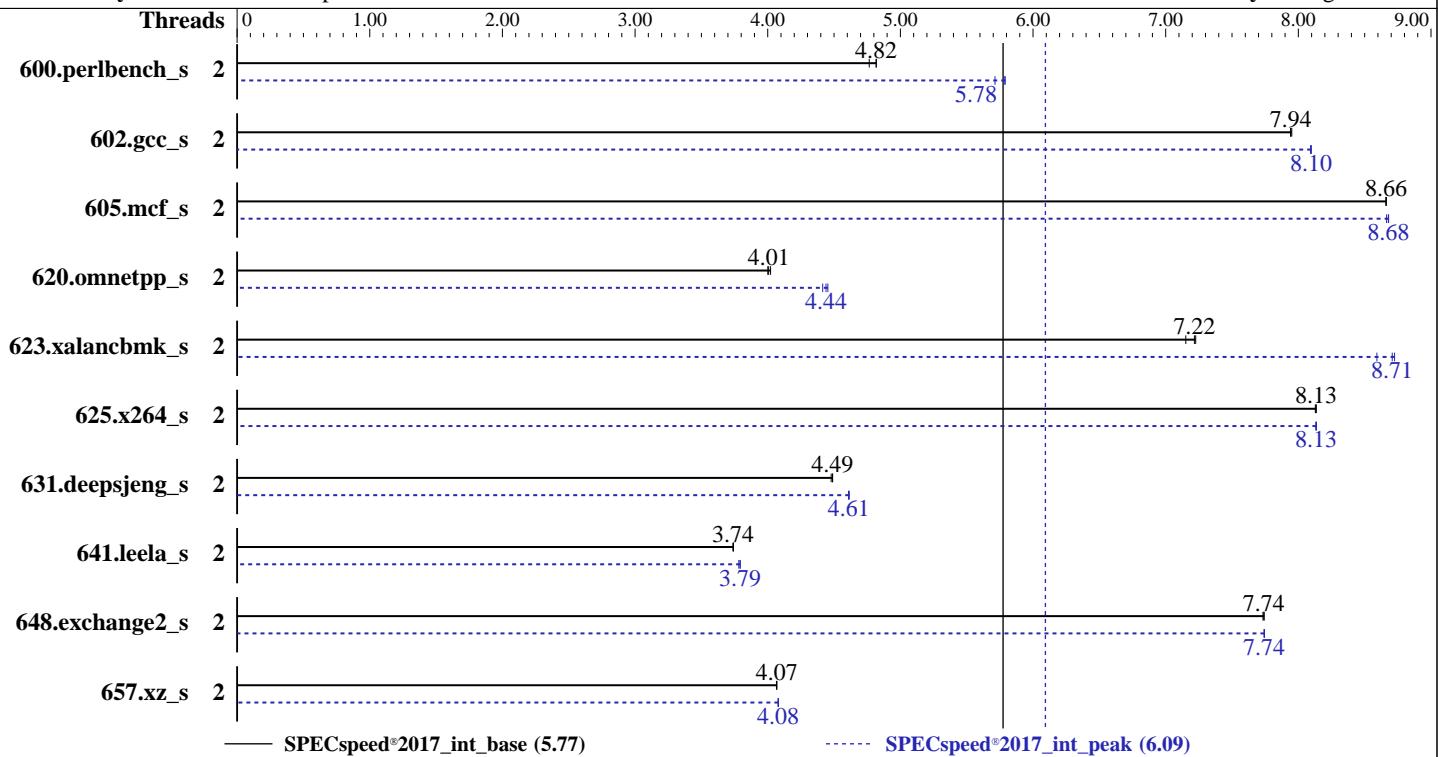

Hardware		Software	
CPU Name:	Intel Celeron G4930	OS:	Red Hat Enterprise Linux Server release 7.7 (Maipo)
Max MHz:	3200	Compiler:	Kernel 3.10.0-1062.el7.x86_64
Nominal:	3200	Parallel:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler Build 20180804 for Linux;
Enabled:	2 cores, 1 chip	Firmware:	Fortran: Version 19.0.0.117 of Intel Fortran Compiler Build 20180804 for Linux
Orderable:	1 chip	File System:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	NEC BIOS Version F01 08/21/2019 released Nov-2019
L2:	256 KB I+D on chip per core	Base Pointers:	ext4
L3:	2 MB I+D on chip per chip	Peak Pointers:	Run level 3 (multi-user)
Other:	None	Other:	64-bit
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)	Power Management:	32/64-bit
Storage:	1 x 2 TB SATA, 7200 RPM		jemalloc memory allocator V5.0.1
Other:	None		--



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 5.77

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	2	372	4.77	368	4.82	368	4.82	2	307	5.79	307	5.78	311	5.71		
602.gcc_s	2	501	7.95	501	7.94	501	7.94	2	492	8.10	492	8.09	492	8.10		
605.mcf_s	2	545	8.66	545	8.66	545	8.66	2	544	8.68	544	8.68	545	8.67		
620.omnetpp_s	2	406	4.02	408	4.00	407	4.01	2	366	4.45	367	4.44	369	4.41		
623.xalancbmk_s	2	196	7.23	198	7.15	196	7.22	2	163	8.71	165	8.59	162	8.73		
625.x264_s	2	217	8.13	217	8.13	217	8.13	2	217	8.13	217	8.13	217	8.14		
631.deepsjeng_s	2	319	4.49	320	4.48	319	4.49	2	311	4.61	311	4.61	311	4.61		
641.leela_s	2	456	3.74	456	3.74	456	3.74	2	450	3.79	451	3.78	450	3.79		
648.exchange2_s	2	380	7.74	380	7.73	380	7.74	2	380	7.74	380	7.74	380	7.74		
657.xz_s	2	1519	4.07	1520	4.07	1520	4.07	2	1516	4.08	1515	4.08	1515	4.08		

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 5.77

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

Platform Notes

BIOS Settings:

VT-x: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on t110j Mon Oct 28 02:33:32 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Celeron(R) G4930 CPU @ 3.20GHz
  1 "physical id"s (chips)
  2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 2
  siblings   : 2
  physical 0: cores 0 1
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                2
On-line CPU(s) list:  0,1
Thread(s) per core:   1
Core(s) per socket:   2
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
Model name:            Intel(R) Celeron(R) G4930 CPU @ 3.20GHz
Stepping:               11
CPU MHz:               3156.835
CPU max MHz:          3200.0000
CPU min MHz:          800.0000
BogoMIPS:              6384.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              256K
L3 cache:              2048K
NUMA node0 CPU(s):    0,1
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 5.77

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc  
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16  
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand  
lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp tpr_shadow vnmi  
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap  
clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window  
hwp_epp md_clear spec_ctrl intel_stibp flush_lld
```

```
/proc/cpuinfo cache data  
cache size : 2048 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0 1  
node 0 size: 65441 MB  
node 0 free: 63572 MB  
node distances:  
node 0  
0: 10
```

```
From /proc/meminfo  
MemTotal:       65880436 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.7 (Maipo)"  
ID="rhel"  
ID_LIKE="fedora"  
VARIANT="Server"  
VARIANT_ID="server"  
VERSION_ID="7.7"  
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:  
Linux t110j 3.10.0-1062.el7.x86_64 #1 SMP Thu Jul 18 20:25:13 UTC 2019 x86_64 x86_64  
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB

run-level 3 Oct 28 02:27

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	1.8T	40G	1.7T	3%	/

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. F01 08/21/2019

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
C++     | 623.xalancbmk_s(peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

=====

C++ | 623.xalancbmk_s(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Base Portability Flags (Continued)

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks (except as noted below):

icpc -m64

623.xalancbmk_s: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Peak Portability Flags (Continued)

602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110j (Intel Celeron G4930)

SPECspeed®2017_int_base = 5.77

SPECspeed®2017_int_peak = 6.09

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-27 13:33:31-0400.

Report generated on 2019-11-12 14:59:51 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.