



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55


Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

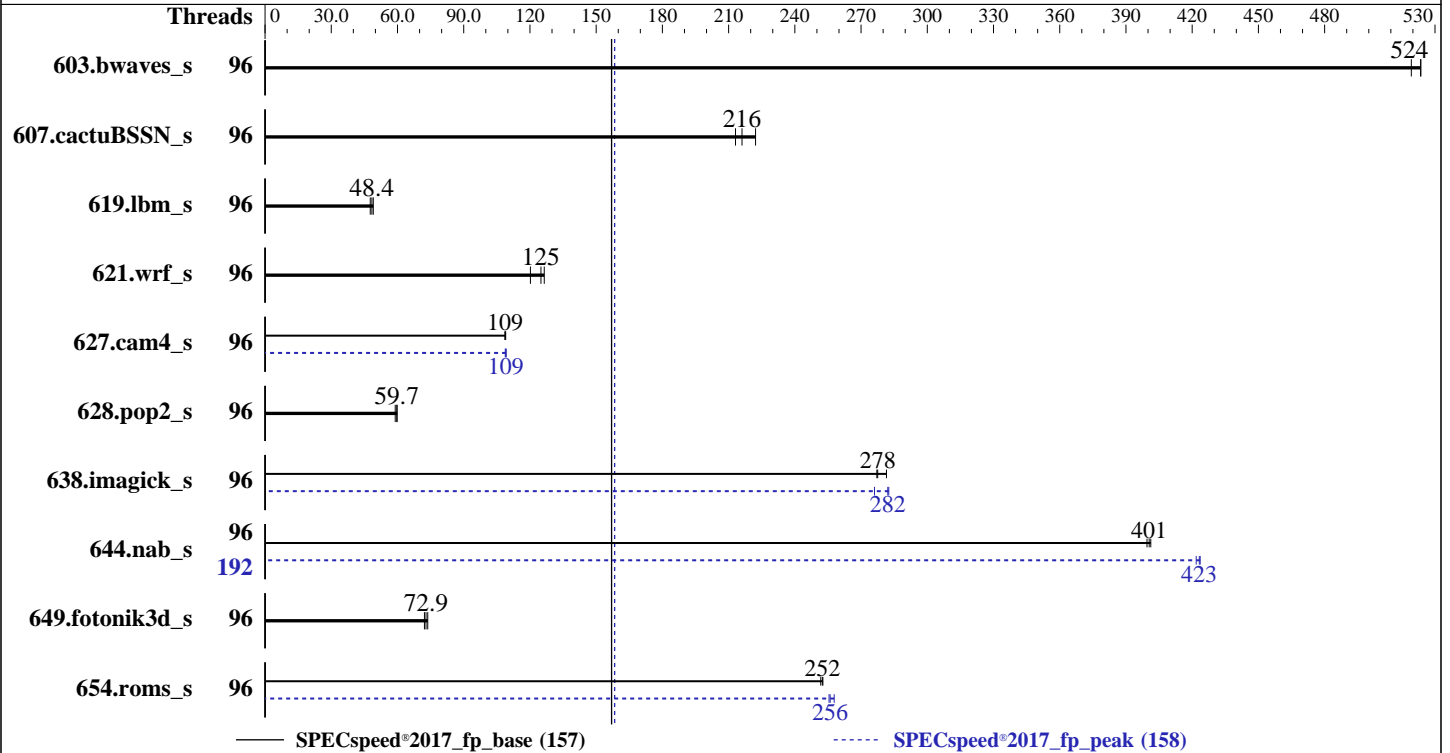

### Hardware

CPU Name: AMD EPYC 7552  
 Max MHz: 3300  
 Nominal: 2200  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 192 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.2.2 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECSpeed®2017\_fp\_peak = 158

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2019  
Hardware Availability: Feb-2020  
Software Availability: Aug-2019

## Results Table

| Benchmark       | Base    |             |             |             |            |             | Peak       |         |            |             |             |            |             |            |
|-----------------|---------|-------------|-------------|-------------|------------|-------------|------------|---------|------------|-------------|-------------|------------|-------------|------------|
|                 | Threads | Seconds     | Ratio       | Seconds     | Ratio      | Seconds     | Ratio      | Threads | Seconds    | Ratio       | Seconds     | Ratio      | Seconds     | Ratio      |
| 603.bwaves_s    | 96      | 114         | 519         | <b>113</b>  | <b>524</b> | 113         | 524        | 96      | 114        | 519         | <b>113</b>  | <b>524</b> | 113         | 524        |
| 607.cactuBSSN_s | 96      | 78.2        | 213         | 75.0        | 222        | <b>77.1</b> | <b>216</b> | 96      | 78.2       | 213         | 75.0        | 222        | <b>77.1</b> | <b>216</b> |
| 619.lbm_s       | 96      | <b>108</b>  | <b>48.4</b> | 110         | 47.7       | 107         | 49.0       | 96      | <b>108</b> | <b>48.4</b> | 110         | 47.7       | 107         | 49.0       |
| 621.wrf_s       | 96      | 105         | 126         | 110         | 120        | <b>106</b>  | <b>125</b> | 96      | 105        | 126         | 110         | 120        | <b>106</b>  | <b>125</b> |
| 627.cam4_s      | 96      | 81.6        | 109         | <b>81.5</b> | <b>109</b> | 81.3        | 109        | 96      | 81.5       | 109         | <b>81.2</b> | <b>109</b> | 81.2        | 109        |
| 628.pop2_s      | 96      | <b>199</b>  | <b>59.7</b> | 198         | 59.8       | 201         | 59.0       | 96      | <b>199</b> | <b>59.7</b> | 198         | 59.8       | 201         | 59.0       |
| 638.imagick_s   | 96      | 52.1        | 277         | <b>52.0</b> | <b>278</b> | 51.2        | 282        | 96      | 52.3       | 276         | <b>51.1</b> | <b>282</b> | 51.1        | 283        |
| 644.nab_s       | 96      | 43.5        | 401         | 43.7        | 400        | <b>43.6</b> | <b>401</b> | 192     | 41.2       | 424         | 41.4        | 422        | <b>41.3</b> | <b>423</b> |
| 649.fotonik3d_s | 96      | <b>125</b>  | <b>72.9</b> | 124         | 73.7       | 126         | 72.2       | 96      | <b>125</b> | <b>72.9</b> | 124         | 73.7       | 126         | 72.2       |
| 654.roms_s      | 96      | <b>62.4</b> | <b>252</b>  | 62.5        | 252        | 62.3        | 253        | 96      | 61.1       | 258         | 61.6        | 255        | <b>61.5</b> | <b>256</b> |

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 158

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-191"

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.0.5/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/64:/root  
/cpu2017-1.0.5/cpu2017-1.1.0/amd\_speed\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "192"

Environment variables set by runcpu during the 627.cam4\_s peak run:

GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 638.imagick\_s peak run:

GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab\_s peak run:

GOMP\_CPU\_AFFINITY = "0 96 1 97 2 98 3 99 4 100 5 101 6 102 7 103 8 104 9 105  
10 106 11 107 12 108 13 109 14 110 15 111 16 112 17 113 18 114 19 115 20  
116 21 117 22 118 23 119 24 120 25 121 26 122 27 123 28 124 29 125 30  
126 31 127 32 128 33 129 34 130 35 131 36 132 37 133 38 134 39 135 40  
136 41 137 42 138 43 139 44 140 45 141 46 142 47 143 48 144 49 145 50  
146 51 147 52 148 53 149 54 150 55 151 56 152 57 153 58 154 59 155 60  
156 61 157 62 158 63 159 64 160 65 161 66 162 67 163 68 164 69 165 70  
166 71 167 72 168 73 169 74 170 75 171 76 172 77 173 78 174 79 175 80  
176 81 177 82 178 83 179 84 180 85 181 86 182 87 183 88 184 89 185 90  
186 91 187 92 188 93 189 94 190 95 191"

Environment variables set by runcpu during the 654.roms\_s peak run:

GOMP\_CPU\_AFFINITY = "0-95"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 1  
 CCX as NUMA Domain set to Enabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost Enabled  
 Cstates set to Enabled  
 Memory Patrol Scrub Disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management Disabled  
 Determinism Slider set to Power Determinism  
 Efficiency Optimized Mode Disabled

Sysinfo program /root/cpu2017-1.0.5/cpu2017-1.1.0/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on linux-g3ob Sat Dec 14 13:52:54 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7552 48-Core Processor  
 2 "physical id"s (chips)  
 192 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following  
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 48  
 siblings : 96  
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47  
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 Address sizes: 43 bits physical, 48 bits virtual  
 CPU(s): 192

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
NUMA node(s): 24
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7552 48-Core Processor
Stepping: 0
CPU MHz: 2195.741
BogoMIPS: 4391.48
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-3,96-99
NUMA node1 CPU(s): 4-7,100-103
NUMA node2 CPU(s): 8-11,104-107
NUMA node3 CPU(s): 12-15,108-111
NUMA node4 CPU(s): 16-19,112-115
NUMA node5 CPU(s): 20-23,116-119
NUMA node6 CPU(s): 24-27,120-123
NUMA node7 CPU(s): 28-31,124-127
NUMA node8 CPU(s): 32-35,128-131
NUMA node9 CPU(s): 36-39,132-135
NUMA node10 CPU(s): 40-43,136-139
NUMA node11 CPU(s): 44-47,140-143
NUMA node12 CPU(s): 48-51,144-147
NUMA node13 CPU(s): 52-55,148-151
NUMA node14 CPU(s): 56-59,152-155
NUMA node15 CPU(s): 60-63,156-159
NUMA node16 CPU(s): 64-67,160-163
NUMA node17 CPU(s): 68-71,164-167
NUMA node18 CPU(s): 72-75,168-171
NUMA node19 CPU(s): 76-79,172-175
NUMA node20 CPU(s): 80-83,176-179
NUMA node21 CPU(s): 84-87,180-183
NUMA node22 CPU(s): 88-91,184-187
NUMA node23 CPU(s): 92-95,188-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
fsgsbase bmil avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 24 nodes (0-23)
node 0 cpus: 0 1 2 3 96 97 98 99
node 0 size: 21051 MB
node 0 free: 20994 MB
node 1 cpus: 4 5 6 7 100 101 102 103
node 1 size: 21501 MB
node 1 free: 21450 MB
node 2 cpus: 8 9 10 11 104 105 106 107
node 2 size: 21502 MB
node 2 free: 21470 MB
node 3 cpus: 12 13 14 15 108 109 110 111
node 3 size: 21501 MB
node 3 free: 21445 MB
node 4 cpus: 16 17 18 19 112 113 114 115
node 4 size: 21501 MB
node 4 free: 21479 MB
node 5 cpus: 20 21 22 23 116 117 118 119
node 5 size: 21503 MB
node 5 free: 21092 MB
node 6 cpus: 24 25 26 27 120 121 122 123
node 6 size: 21501 MB
node 6 free: 21307 MB
node 7 cpus: 28 29 30 31 124 125 126 127
node 7 size: 21501 MB
node 7 free: 21474 MB
node 8 cpus: 32 33 34 35 128 129 130 131
node 8 size: 21503 MB
node 8 free: 21454 MB
node 9 cpus: 36 37 38 39 132 133 134 135
node 9 size: 21501 MB
node 9 free: 21471 MB
node 10 cpus: 40 41 42 43 136 137 138 139
node 10 size: 21501 MB
node 10 free: 21468 MB
node 11 cpus: 44 45 46 47 140 141 142 143
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 11 size: 21490 MB
node 11 free: 21468 MB
node 12 cpus: 48 49 50 51 144 145 146 147
node 12 size: 21472 MB
node 12 free: 21450 MB
node 13 cpus: 52 53 54 55 148 149 150 151
node 13 size: 21501 MB
node 13 free: 21481 MB
node 14 cpus: 56 57 58 59 152 153 154 155
node 14 size: 21502 MB
node 14 free: 21482 MB
node 15 cpus: 60 61 62 63 156 157 158 159
node 15 size: 21501 MB
node 15 free: 21481 MB
node 16 cpus: 64 65 66 67 160 161 162 163
node 16 size: 21501 MB
node 16 free: 21473 MB
node 17 cpus: 68 69 70 71 164 165 166 167
node 17 size: 21503 MB
node 17 free: 21483 MB
node 18 cpus: 72 73 74 75 168 169 170 171
node 18 size: 21501 MB
node 18 free: 21479 MB
node 19 cpus: 76 77 78 79 172 173 174 175
node 19 size: 21501 MB
node 19 free: 21481 MB
node 20 cpus: 80 81 82 83 176 177 178 179
node 20 size: 21503 MB
node 20 free: 21482 MB
node 21 cpus: 84 85 86 87 180 181 182 183
node 21 size: 21501 MB
node 21 free: 21479 MB
node 22 cpus: 88 89 90 91 184 185 186 187
node 22 size: 21501 MB
node 22 free: 21480 MB
node 23 cpus: 92 93 94 95 188 189 190 191
node 23 size: 21501 MB
node 23 free: 21478 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23
0: 10 11 11 11 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32
32 32 32 32
1: 11 10 11 11 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32
32 32 32 32
2: 11 11 10 11 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32
32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

|     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 3:  | 11 | 11 | 11 | 10 | 11 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 4:  | 11 | 11 | 11 | 11 | 10 | 11 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 5:  | 11 | 11 | 11 | 11 | 11 | 10 | 12 | 12 | 12 | 12 | 12 | 12 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 6:  | 12 | 12 | 12 | 12 | 12 | 12 | 10 | 11 | 11 | 11 | 11 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 7:  | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 10 | 11 | 11 | 11 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 8:  | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 10 | 11 | 11 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 9:  | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 11 | 10 | 11 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 10: | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 10 | 11 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 11: | 12 | 12 | 12 | 12 | 12 | 12 | 11 | 11 | 11 | 11 | 11 | 10 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 32  | 32 | 32 | 32 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 12: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 10 | 11 | 11 | 11 | 11 | 11 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 13: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 10 | 11 | 11 | 11 | 11 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 14: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 11 | 10 | 11 | 11 | 11 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 15: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 11 | 11 | 10 | 11 | 11 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 16: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 11 | 11 | 11 | 10 | 11 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 17: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 11 | 11 | 11 | 11 | 11 | 10 | 12 |
| 12  | 12 | 12 | 12 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 18: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 10 |
| 11  | 11 | 11 | 11 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 19: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 |
| 11  | 11 | 11 | 11 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 20: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 |
| 10  | 11 | 11 | 11 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 21: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 |
| 11  | 10 | 11 | 11 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 22: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 |
| 11  | 11 | 10 | 11 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 23: | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 12 | 12 | 12 | 11 |
| 11  | 11 | 11 | 10 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

```

From /proc/meminfo
MemTotal:      527930332 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP1"

VERSION\_ID="15.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: conditional, RSB filling

run-level 3 Dec 13 09:58

SPEC is set to: /root/cpu2017-1.0.5/cpu2017-1.1.0

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda2  | xfs  | 440G | 23G  | 418G  | 6%   | /          |

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 1.2.2 11/13/2019

Vendor: Dell Inc.

Product: PowerEdge C6525

Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

1x 802C8632802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECSpeed®2017\_fp\_peak = 158

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2019  
Hardware Availability: Feb-2020  
Software Availability: Aug-2019

## Platform Notes (Continued)

5x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200  
5x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM_2_0_0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM_2_0_0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECSpeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Base Portability Flags (Continued)

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

```
638.imagick_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

621.wrf\_s: basepeak = yes

```

627.cam4_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang

```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 157

PowerEdge C6525 (AMD EPYC 7552, 2.20 GHz)

SPECspeed®2017\_fp\_peak = 158

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Dec-2019

**Hardware Availability:** Feb-2020

**Software Availability:** Aug-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-14 13:52:54-0500.

Report generated on 2020-01-08 12:06:16 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-07.