



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55


Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jun-2019

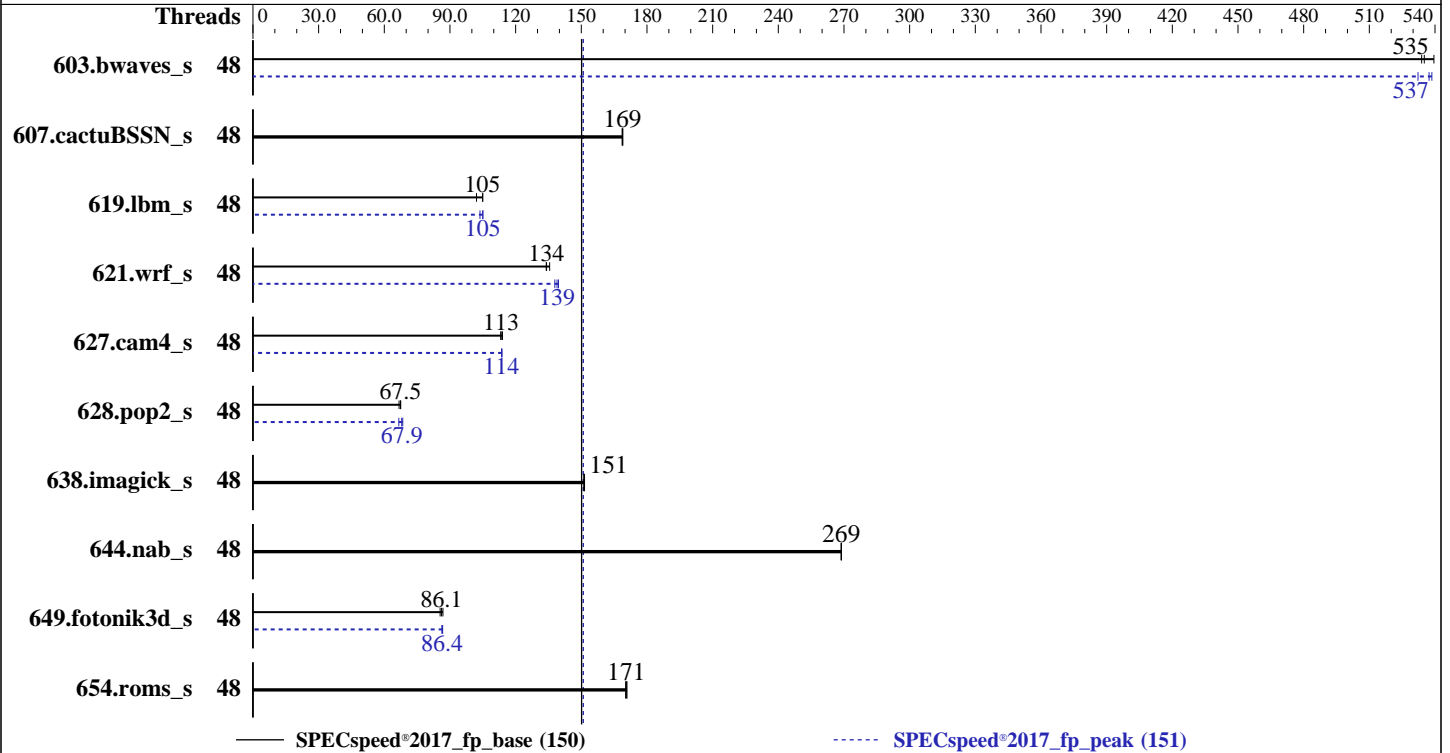

### Hardware

CPU Name: Intel Xeon Gold 6240R  
 Max MHz: 4000  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R, running at 2933)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version 2.5.4 released Jan-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	<b>110</b>	<b>535</b>	109	540	111	534	48	110	539	<b>110</b>	<b>537</b>	111	532
607.cactuBSSN_s	48	<b>98.7</b>	<b>169</b>	98.7	169	98.8	169	48	<b>98.7</b>	<b>169</b>	98.7	169	98.8	169
619.lbm_s	48	49.9	105	<b>49.9</b>	<b>105</b>	51.3	102	48	50.5	104	49.9	105	<b>49.9</b>	<b>105</b>
621.wrf_s	48	98.7	134	<b>98.6</b>	<b>134</b>	97.6	136	48	<b>95.2</b>	<b>139</b>	94.8	140	95.9	138
627.cam4_s	48	77.7	114	<b>78.2</b>	<b>113</b>	78.3	113	48	<b>78.1</b>	<b>114</b>	77.9	114	78.1	114
628.pop2_s	48	<b>176</b>	<b>67.5</b>	176	67.5	178	66.7	48	174	68.4	<b>175</b>	<b>67.9</b>	178	66.6
638.imagick_s	48	95.2	151	95.5	151	<b>95.2</b>	<b>151</b>	48	95.2	151	95.5	151	<b>95.2</b>	<b>151</b>
644.nab_s	48	<b>65.0</b>	<b>269</b>	65.0	269	65.0	269	48	<b>65.0</b>	<b>269</b>	65.0	269	65.0	269
649.fotonik3d_s	48	105	86.8	107	85.5	<b>106</b>	<b>86.1</b>	48	106	86.4	<b>106</b>	<b>86.4</b>	105	86.7
654.roms_s	48	<b>92.3</b>	<b>171</b>	92.5	170	92.1	171	48	<b>92.3</b>	<b>171</b>	92.5	170	92.1	171

SPECSpeed®2017\_fp\_base = 150

SPECSpeed®2017\_fp\_peak = 151

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Platform Notes

BIOS settings:

Sub NUMA Cluster disabled  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor disabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 UPI Prefetch enabled  
 LLC Prefetch disabled  
 Dead Line LLC Alloc enabled  
 Directory AtoS disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on linux-g3ob Thu Jan 16 16:22:39 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz  
 2 "physical id"s (chips)  
 48 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 24  
 siblings : 24  
 physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 Address sizes: 46 bits physical, 48 bits virtual  
 CPU(s): 48  
 On-line CPU(s) list: 0-47  
 Thread(s) per core: 1  
 Core(s) per socket: 24  
 Socket(s): 2

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jun-2019

## Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz
Stepping:              7
CPU MHz:                2400.000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K

```

```

NUMA node0 CPU(s):    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46

```

```

NUMA node1 CPU(s):    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47

```

```

Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46
node 0 size: 192042 MB
node 0 free: 184749 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47
node 1 size: 193530 MB
node 1 free: 192647 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 394826428 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP1"

VERSION\_ID="15.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

Microarchitectural Data Sampling: Not affected

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jan 16 05:48 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	440G	58G	383G	13%	/

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.5.4 01/13/2020

Vendor: Dell Inc.

Product: PowerEdge R740xd

Product Family: PowerEdge

Serial: F5BMCS2

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933

7x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

5x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

```

-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
        | 654.roms_s(base, peak)
=====

```

```

-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
           | 628.pop2_s(base, peak)
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECSpeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Peak Optimization Flags (Continued)

619.lbm\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC\_OPENMP

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 150

PowerEdge R740xd (Intel Xeon Gold 6240R, 2.40 GHz)

SPECspeed®2017\_fp\_peak = 151

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-16 17:22:38-0500.  
Report generated on 2020-03-02 11:48:30 by CPU2017 PDF formatter v6255.  
Originally published on 2020-02-29.