



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

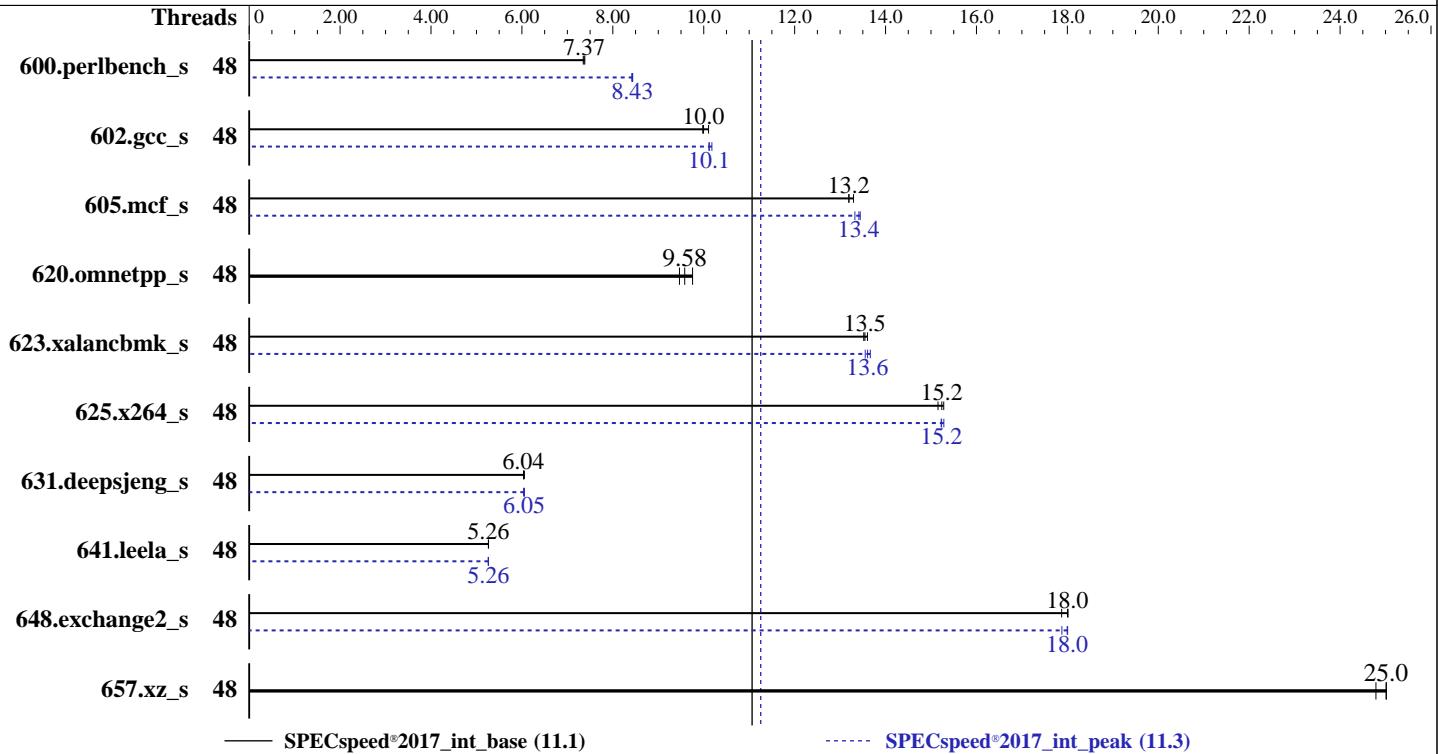

Hardware		Software	
CPU Name:	Intel Xeon Gold 6256	OS:	Red Hat Enterprise Linux Server release 7.7 (Maipo)
Max MHz:	4500		Kernel 3.10.0-1062.1.1.el7.x86_64
Nominal:	3600	Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Enabled:	24 cores, 2 chips, 2 threads/core		Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Orderable:	1,2 chips	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	NEC BIOS Version U32 v2.32 03/09/2020 released Jun-2020
L2:	1 MB I+D on chip per core	File System:	ext4
L3:	33 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)	Peak Pointers:	64-bit
Storage:	1 x 1 TB SATA, 7200 RPM, RAID 0	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

**SPECspeed®2017\_int\_base = 11.1**

**SPECspeed®2017\_int\_peak = 11.3**

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	242	7.35	<b>241</b>	<b>7.37</b>	240	7.38	48	<b>210</b>	<b>8.43</b>	210	8.44	211	8.42		
602.gcc_s	48	<b>398</b>	<b>10.0</b>	394	10.1	399	9.98	48	391	10.2	394	10.1	<b>393</b>	<b>10.1</b>		
605.mcf_s	48	<b>358</b>	<b>13.2</b>	355	13.3	358	13.2	48	351	13.4	<b>352</b>	<b>13.4</b>	354	13.3		
620.omnetpp_s	48	<b>170</b>	<b>9.58</b>	167	9.75	172	9.47	48	<b>170</b>	<b>9.58</b>	167	9.75	172	9.47		
623.xalancbmk_s	48	105	13.5	104	13.6	<b>105</b>	<b>13.5</b>	48	104	13.7	<b>104</b>	<b>13.6</b>	105	13.6		
625.x264_s	48	116	15.2	115	15.3	<b>116</b>	<b>15.2</b>	48	116	15.2	<b>116</b>	<b>15.2</b>	115	15.3		
631.deepsjeng_s	48	<b>237</b>	<b>6.04</b>	237	6.05	237	6.04	48	237	6.04	<b>237</b>	<b>6.05</b>	237	6.05		
641.leela_s	48	324	5.27	<b>324</b>	<b>5.26</b>	324	5.26	48	324	5.26	<b>324</b>	<b>5.26</b>	324	5.26		
648.exchange2_s	48	<b>163</b>	<b>18.0</b>	164	17.9	163	18.0	48	164	17.9	<b>163</b>	<b>18.0</b>	163	18.0		
657.xz_s	48	247	25.0	249	24.8	<b>247</b>	<b>25.0</b>	48	247	25.0	249	24.8	<b>247</b>	<b>25.0</b>		
<b>SPECspeed®2017_int_base = 11.1</b>																
<b>SPECspeed®2017_int_peak = 11.3</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling  
Workload Profile: General Peak Frequency Compute  
Memory Patrol Scrubbing: Disabled  
LLC Dead Line Allocation: Disabled  
LLC Prefetch: Enabled  
Enhanced Processor Performance: Enabled  
Workload Profile: Custom  
NUMA Group Size Optimization: Flat

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on r120h1m Sun Nov 8 01:21:00 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz  
 2 "physical id"s (chips)  
 48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 12  
siblings : 24  
physical 0: cores 0 1 10 12 13 16 19 21 25 26 27 29  
physical 1: cores 0 5 9 10 11 13 16 20 21 24 25 29

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 48  
On-line CPU(s) list: 0-47  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120h-1M (Intel Xeon Gold 6256)

**SPECspeed®2017\_int\_base = 11.1**

**SPECspeed®2017\_int\_peak = 11.3**

**CPU2017 License:** 9006

**Test Date:** Nov-2020

**Test Sponsor:** NEC Corporation

**Hardware Availability:** May-2020

**Tested by:** NEC Corporation

**Software Availability:** Sep-2019

## Platform Notes (Continued)

Model: 85  
Model name: Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz  
Stepping: 7  
CPU MHz: 3600.000  
BogoMIPS: 7200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 33792K  
NUMA node0 CPU(s): 0-11,24-35  
NUMA node1 CPU(s): 12-23,36-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_13 cdp\_13 invpcid\_single intel\_ppin intel\_pt ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear spec\_ctrl intel\_stibp flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35  
node 0 size: 196264 MB  
node 0 free: 191545 MB  
node 1 cpus: 36 37 38 39 40 41 42 43 44 45 46 47  
node 1 size: 196607 MB  
node 1 free: 192126 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 395921672 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.7 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.7"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

run-level 3 Nov 8 01:15

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	232G	630G	27%	/

```
From /sys/devices/virtual/dmi/id
```

BIOS: NEC U32 03/09/2020

Vendor: NEC

Product: Express5800/R120h-1M

Serial: JPN0084094

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x HPE P03050-091 16 GB 2 rank 2933

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/jet5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkalloc
```

631.deepsjeng\_s: Same as 623.xalancbmk\_s

641.leela\_s: Same as 623.xalancbmk\_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6256)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Nov-2020

**Hardware Availability:** May-2020

**Software Availability:** Sep-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-07 11:20:59-0500.

Report generated on 2020-11-25 10:30:09 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.