



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176


Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

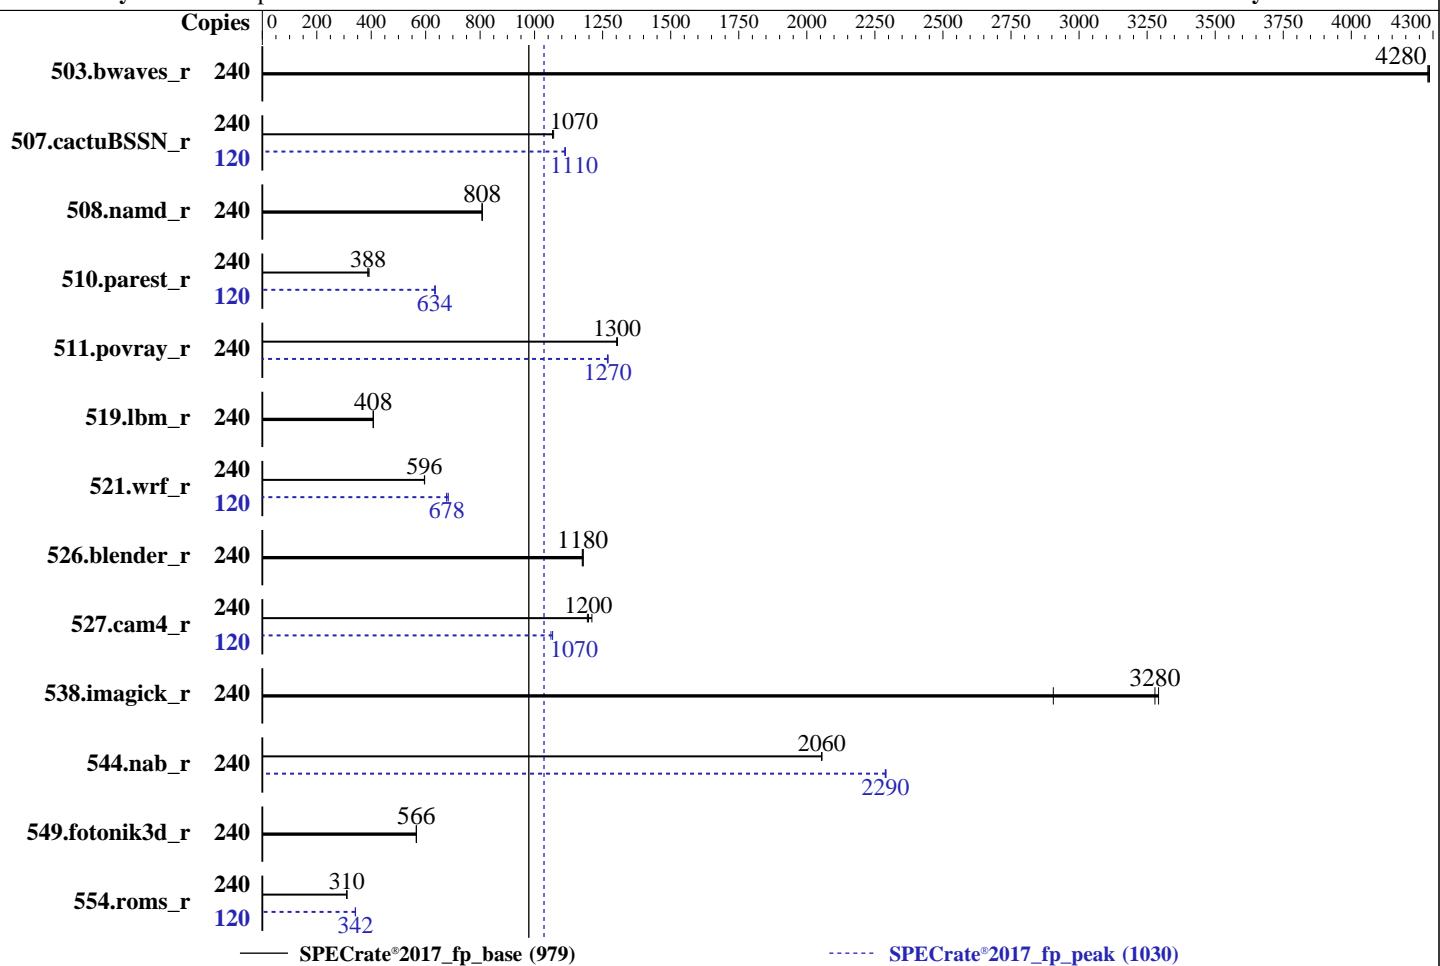

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 120 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1.92 TB NVMe SSD
Other: None

OS:

SUSE Linux Enterprise High Performance Computing
15 SP4

Compiler:

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler
for Linux;

Parallel:

No

Firmware:

Version 1.1 released Feb-2023

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|-------------|-------------|-------------|-------------|------------|-------------|--------|------------|-------------|-------------|-------------|------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 240 | 561 | 4290 | 562 | 4280 | 562 | 4280 | 240 | 561 | 4290 | 562 | 4280 | 562 | 4280 | 562 | 4280 |
| 507.cactubSSN_r | 240 | 285 | 1070 | 285 | 1070 | 284 | 1070 | 120 | 136 | 1110 | 137 | 1110 | 137 | 1110 | 137 | 1110 |
| 508.namd_r | 240 | 282 | 808 | 282 | 808 | 282 | 807 | 240 | 282 | 808 | 282 | 808 | 282 | 807 | 282 | 807 |
| 510.parest_r | 240 | 1619 | 388 | 1617 | 388 | 1601 | 392 | 120 | 495 | 634 | 494 | 635 | 495 | 634 | 495 | 634 |
| 511.povray_r | 240 | 430 | 1300 | 430 | 1300 | 430 | 1300 | 240 | 441 | 1270 | 442 | 1270 | 442 | 1270 | 442 | 1270 |
| 519.lbm_r | 240 | 621 | 408 | 621 | 408 | 620 | 408 | 240 | 621 | 408 | 621 | 408 | 620 | 408 | 620 | 408 |
| 521.wrf_r | 240 | 903 | 595 | 903 | 596 | 902 | 596 | 120 | 397 | 677 | 397 | 678 | 393 | 683 | 393 | 683 |
| 526.blender_r | 240 | 311 | 1180 | 311 | 1180 | 310 | 1180 | 240 | 311 | 1180 | 311 | 1180 | 310 | 1180 | 310 | 1180 |
| 527.cam4_r | 240 | 352 | 1190 | 350 | 1200 | 347 | 1210 | 120 | 197 | 1070 | 198 | 1060 | 197 | 1070 | 197 | 1070 |
| 538.imagick_r | 240 | 181 | 3290 | 182 | 3280 | 205 | 2910 | 240 | 181 | 3290 | 182 | 3280 | 205 | 2910 | 205 | 2910 |
| 544.nab_r | 240 | 197 | 2060 | 197 | 2050 | 197 | 2060 | 240 | 177 | 2290 | 176 | 2290 | 176 | 2290 | 176 | 2290 |
| 549.fotonik3d_r | 240 | 1652 | 566 | 1652 | 566 | 1654 | 565 | 240 | 1652 | 566 | 1652 | 566 | 1654 | 565 | 1654 | 565 |
| 554.roms_r | 240 | 1229 | 310 | 1227 | 311 | 1231 | 310 | 120 | 558 | 342 | 558 | 342 | 557 | 342 | 557 | 342 |

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Hyper-Threading [ALL] = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

DCU Streamer Prefetcher = Disable

KTI Prefetch = Enable

SNC = Enable SNC4 (4-clusters)

LLC Dead Line Alloc = Disable

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 165-76 Wed Jan 4 02:21:07 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

```
1. uname -a
Linux 165-76 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
02:21:08 up 6:54, 1 user, load average: 177.49, 224.32, 231.48
USER      TTY      FROM          LOGIN@     IDLE    JCPU    PCPU WHAT
root      tty1          -           19:27     6:53m   1.11s   0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4125087
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4125087
virtual memory             (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Platform Notes (Continued)

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
 ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=120 --define physicalfirst
 --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
 ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=120 --define physicalfirst
 --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
 --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
 \$SPEC/tmp/CPU2017.010/templogs/preenv.fprate.010.0.log --lognum 010.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 6
microcode : 0x2b000161
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 60
siblings : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

| | |
|-----------------|-----------------------------------|
| Architecture: | x86_64 |
| CPU op-mode(s): | 32-bit, 64-bit |
| Address sizes: | 46 bits physical, 57 bits virtual |
| Byte Order: | Little Endian |
| CPU(s): | 240 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

| | |
|----------------------------------|--|
| On-line CPU(s) list: | 0-239 |
| Vendor ID: | GenuineIntel |
| Model name: | Intel(R) Xeon(R) Platinum 8490H |
| CPU family: | 6 |
| Model: | 143 |
| Thread(s) per core: | 2 |
| Core(s) per socket: | 60 |
| Socket(s): | 2 |
| Stepping: | 6 |
| BogomIPS: | 3800.00 |
| Flags: | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities VT-x |
| Virtualization: | |
| L1d cache: | 5.6 MiB (120 instances) |
| L1i cache: | 3.8 MiB (120 instances) |
| L2 cache: | 240 MiB (120 instances) |
| L3 cache: | 225 MiB (2 instances) |
| NUMA node(s): | 8 |
| NUMA node0 CPU(s): | 0-14,120-134 |
| NUMA node1 CPU(s): | 15-29,135-149 |
| NUMA node2 CPU(s): | 30-44,150-164 |
| NUMA node3 CPU(s): | 45-59,165-179 |
| NUMA node4 CPU(s): | 60-74,180-194 |
| NUMA node5 CPU(s): | 75-89,195-209 |
| NUMA node6 CPU(s): | 90-104,210-224 |
| NUMA node7 CPU(s): | 105-119,225-239 |
| Vulnerability Itlb multihit: | Not affected |
| Vulnerability L1tf: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp |
| Vulnerability Spectre v1: | Mitigation; usercopy/swapgs barriers and __user pointer sanitization |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 5.6M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 3.8M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 240M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 112.5M | 225M | 15 | Unified | 3 | 122880 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-14,120-134
node 0 size: 128582 MB
node 0 free: 113523 MB
node 1 cpus: 15-29,135-149
node 1 size: 129016 MB
node 1 free: 115363 MB
node 2 cpus: 30-44,150-164
node 2 size: 129016 MB
node 2 free: 116791 MB
node 3 cpus: 45-59,165-179
node 3 size: 129016 MB
node 3 free: 116571 MB
node 4 cpus: 60-74,180-194
node 4 size: 128981 MB
node 4 free: 116703 MB
node 5 cpus: 75-89,195-209
node 5 size: 129016 MB
node 5 free: 116755 MB
node 6 cpus: 90-104,210-224
node 6 size: 129016 MB
node 6 free: 116819 MB
node 7 cpus: 105-119,225-239
node 7 size: 128649 MB
node 7 free: 116438 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 21 10 12 12 12
 5: 21 21 21 21 12 10 12 12
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Date: Jan-2023

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

Platform Notes (Continued)

```
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 1056046596 kB
```

10. who -r

```
run-level 3 Jan 3 19:27
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

| STATE | UNIT FILES |
|-----------------|---|
| enabled | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs |
| disabled | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 |
| indirect | wickedd |

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=08300cd0-4901-419a-8ad6-76b0b6fc220f
splash=silent
resume=/dev/disk/by-uuid/39fb07a6-9b70-4901-aaca-462813fc7067
mitigations=auto
quiet
security=apparmor
crashkernel=320M,high
crashkernel=72M,low
```

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Platform Notes (Continued)

analyzing CPU 0:

 Unable to determine current policy

 boost state support:

 Supported: yes

 Active: yes

15. tuned-adm active

 It seems that tuned daemon is not running, preset profile is not activated.

 Preset profile: throughput-performance

16. sysctl

| | |
|------------------------------|-------|
| kernel.numa_balancing | 1 |
| kernel.randomize_va_space | 2 |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes | 0 |
| vm.dirty_background_ratio | 10 |
| vm.dirty_bytes | 0 |
| vm.dirty_expire_centisecs | 3000 |
| vm.dirty_ratio | 20 |
| vm.dirty_writeback_centisecs | 500 |
| vm.dirtytime_expire_seconds | 43200 |
| vm.extfrag_threshold | 500 |
| vm.min_unmapped_ratio | 1 |
| vm.nr_hugepages | 0 |
| vm.nr_hugepages_mempolicy | 0 |
| vm.nr_overcommit_hugepages | 0 |
| vm.swappiness | 60 |
| vm.watermark_boost_factor | 15000 |
| vm.watermark_scale_factor | 10 |
| vm.zone_reclaim_mode | 0 |

17. /sys/kernel/mm/transparent_hugepage

| | |
|----------------|--|
| defrag | always defer defer+madvise [madvise] never |
| enabled | [always] madvise never |
| hpage_pmd_size | 2097152 |
| shmem_enabled | always within_size advise [never] deny force |

18. /sys/kernel/mm/transparent_hugepage/khugepaged

| | |
|-----------------------|-------|
| alloc_sleep_millisecs | 60000 |
| defrag | 1 |
| max_ptes_none | 511 |
| max_ptes_shared | 256 |
| max_ptes_swap | 64 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP4
```

20. Disk information

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|----------------|------|------|------|-------|------|------------|
| /dev/nvme0n1p4 | xfs | 738G | 142G | 596G | 20% | /home |

21. /sys/devices/virtual/dmi/id

Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.1
BIOS Date: 12/31/2022
BIOS Revision: 5.29

Compiler Version Notes

```
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
   | 544.nab_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Compiler Version Notes (Continued)

Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Compiler Version Notes (Continued)

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Base Portability Flags (Continued)

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TN24R
(X13DEM , Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_fp_base = 979

SPECrate®2017_fp_peak = 1030

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-04 05:21:07-0500.

Report generated on 2023-03-01 14:46:48 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-01.