



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix


SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

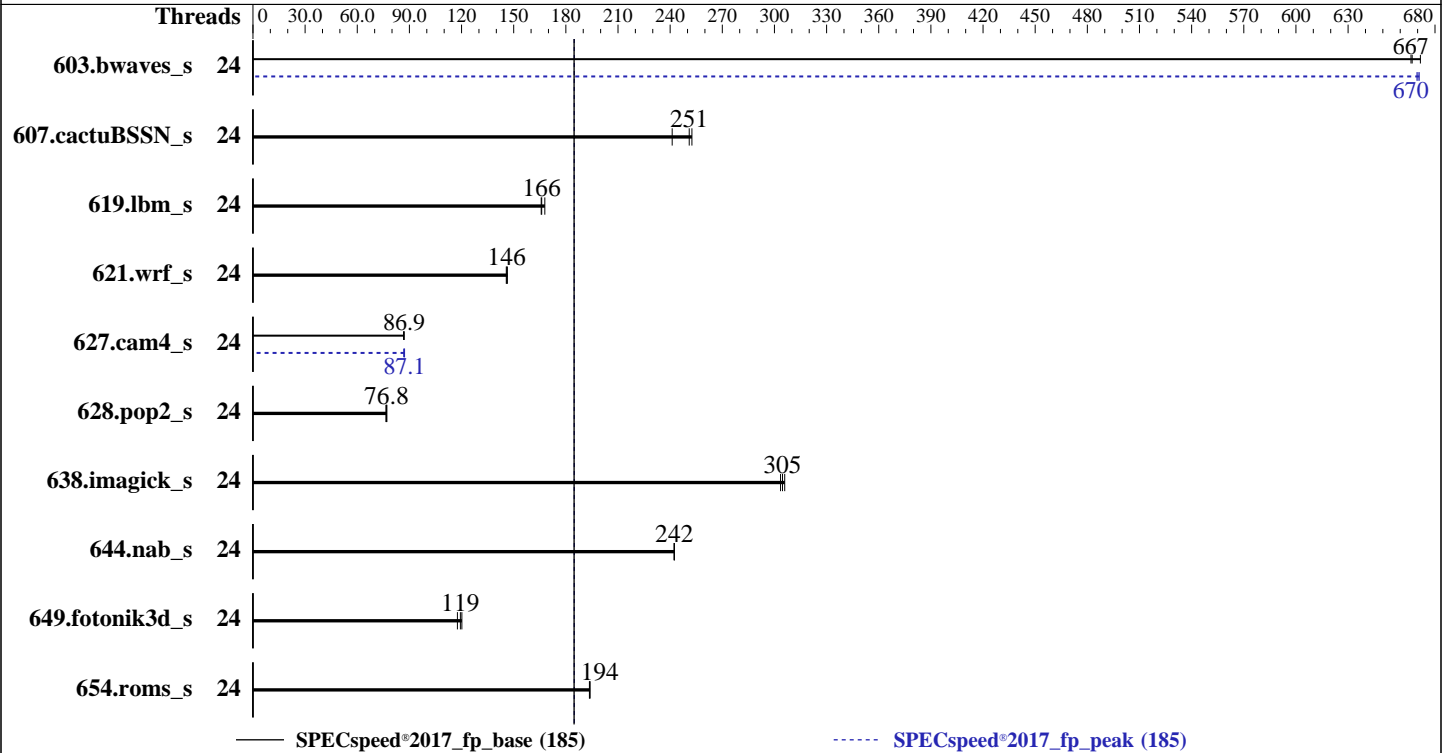

### Hardware

CPU Name: Intel Xeon Silver 4410Y  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 Classic for Linux;  
 C/C++: Version 2023.0 of Intel C/C++ Compiler  
 Classic for Linux  
 Parallel: Yes  
 Firmware: Nettrix BIOS Version NNH1041018-U00-1 released  
 Nov-2022  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECSpeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECSpeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	87.8	672	88.6	666	<b>88.5</b>	<b>667</b>	24	<b>88.0</b>	<b>670</b>	87.9	671	88.1	670
607.cactuBSSN_s	24	<b>66.4</b>	<b>251</b>	66.0	253	69.1	241	24	<b>66.4</b>	<b>251</b>	66.0	253	69.1	241
619.lbm_s	24	31.6	166	<b>31.5</b>	<b>166</b>	31.2	168	24	31.6	166	<b>31.5</b>	<b>166</b>	31.2	168
621.wrf_s	24	90.8	146	90.4	146	<b>90.6</b>	<b>146</b>	24	90.8	146	90.4	146	<b>90.6</b>	<b>146</b>
627.cam4_s	24	<b>102</b>	<b>86.9</b>	102	86.9	102	86.6	24	102	86.7	<b>102</b>	<b>87.1</b>	102	87.2
628.pop2_s	24	<b>154</b>	<b>76.8</b>	154	77.0	155	76.5	24	<b>154</b>	<b>76.8</b>	154	77.0	155	76.5
638.imagick_s	24	47.5	304	<b>47.4</b>	<b>305</b>	47.2	306	24	47.5	304	<b>47.4</b>	<b>305</b>	47.2	306
644.nab_s	24	72.1	242	<b>72.1</b>	<b>242</b>	72.1	242	24	72.1	242	<b>72.1</b>	<b>242</b>	72.1	242
649.fotonik3d_s	24	75.9	120	<b>76.4</b>	<b>119</b>	77.5	118	24	75.9	120	<b>76.4</b>	<b>119</b>	77.5	118
654.roms_s	24	<b>81.3</b>	<b>194</b>	81.2	194	81.4	194	24	<b>81.3</b>	<b>194</b>	81.2	194	81.4	194

SPECSpeed®2017\_fp\_base = **185**

SPECSpeed®2017\_fp\_peak = **185**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

- Enable LP [Global] set to Single LP
- LLC Prefetch set to Enabled
- SNC (Sub NUMA) set to Disabled
- Patrol Scrub set to Disabled
- LLC dead line alloc set to Disabled
- XPT Prefetch set to Enabled
- KTI Prefetch set to Disabled
- DCU Streamer Prefetcher set to Disabled
- Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri Apr 29 20:42:09 2022

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Mar-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

23. BIOS

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
20:42:09 up 42 min, 1 user, load average: 0.00, 0.12, 2.57
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      pts/0    10.2.48.216   20:01      41.00s     1.06s  0.00s  -bash
```

3. Username

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125340
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125340
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak -o all --define
drop_caches fpspeed
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Mar-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.076/temlogs/preenv.fpspeed.076.0.log --lognum 076.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/lijq
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4410Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000111
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 12
siblings        : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0:  core ids 0-11
physical id 1:  core ids 0-11
physical id 0:  apicids 0,2,4,6,8,10,12,14,16,18,20,22
physical id 1:  apicids 128,130,132,134,136,138,140,142,144,146,148,150
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             24
On-line CPU(s) list: 0-23
Vendor ID:          GenuineIntel
Model name:         Intel(R) Xeon(R) Silver 4410Y
CPU family:         6
Model:              143
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s):          2
Stepping:           8
CPU max MHz:        3900.0000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

### Platform Notes (Continued)

```

CPU min MHz:                800.0000
BogoMIPS:                   4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                                erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                                avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                amx_tile flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   1.1 MiB (24 instances)
L1i cache:                   768 KiB (24 instances)
L2 cache:                    48 MiB (24 instances)
L3 cache:                    60 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):          0-11
NUMA node1 CPU(s):          12-23
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Mar-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-11
node 0 size: 515579 MB
node 0 free: 513861 MB
node 1 cpus: 12-23
node 1 size: 515777 MB
node 1 free: 513258 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

9. /proc/meminfo  
MemTotal: 1056109668 kB

10. who -r  
run-level 3 Apr 29 20:00

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump kdump-early postfix purge-kernels rollback smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ smartd_generate_opts systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=85a6fd00-fd0c-4883-b29c-e0cf4342a6ea  
splash=silent  
mitigations=auto  
quiet

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Mar-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
security=apparmor
crashkernel=300M,high
crashkernel=72M,low
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. tuned-adm active

```
Current active profile: throughput-performance
```

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none            511
   max_ptes_shared          256
   max_ptes_swap            64
   pages_to_scan            4096
   scan_sleep_millisecs     10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
   SPEC is set to: /home/lijq
   Filesystem      Type      Size    Used Avail Use% Mounted on
   /dev/sda2       btrfs    892G    165G  726G  19% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:          Nettrix
   Product:         R620 G50
   Product Family: Rack
   Serial:          6101810603447823

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4000

```

```

-----
23. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      American Megatrends International, LLC.
   BIOS Version:     NNH1041018-U00-1
   BIOS Date:        11/01/2022
   BIOS Revision:    5.29

```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Mar-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Mar-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_fp\_base = 185

R620 G50 (Intel Xeon Silver 4410Y, 2.00 GHz)

SPECspeed®2017\_fp\_peak = 185

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-29 08:42:08-0400.

Report generated on 2023-04-12 12:49:26 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.