



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

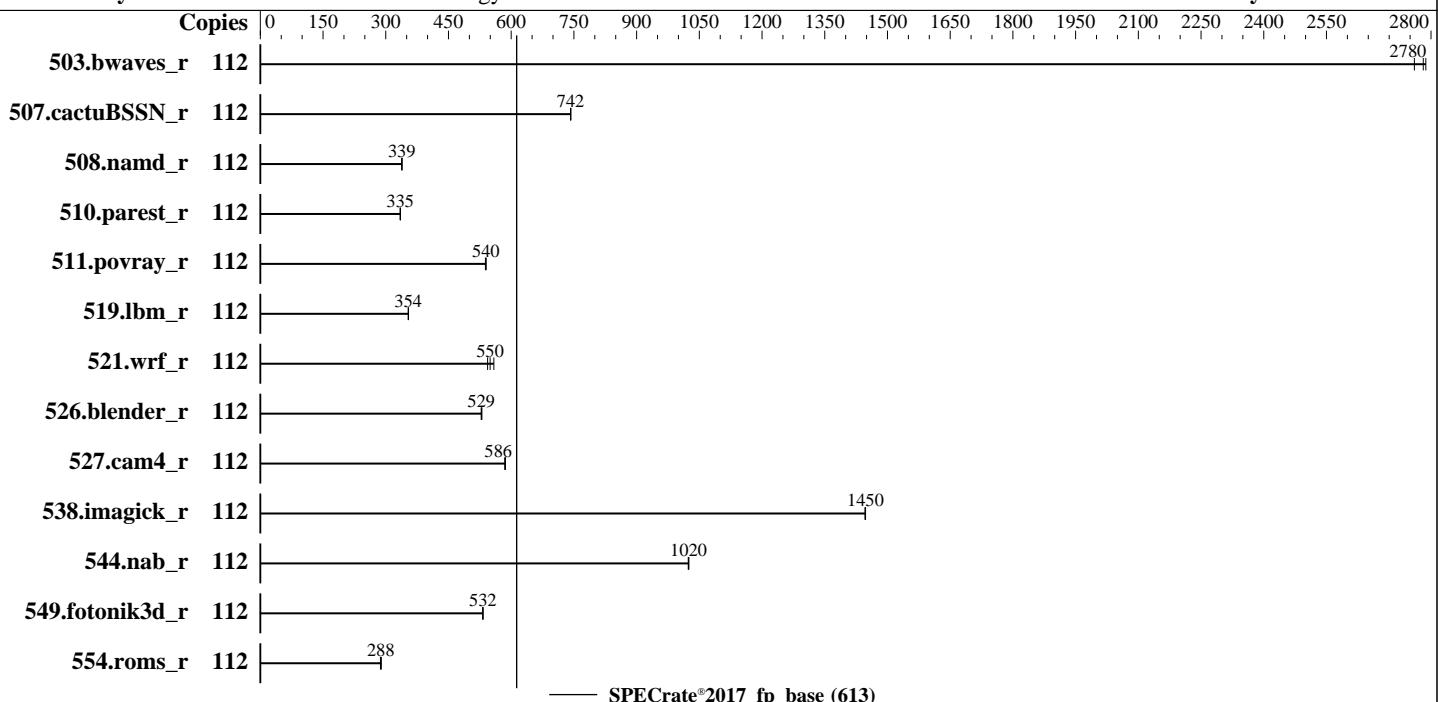

Hardware

CPU Name: Intel Xeon Platinum 8450H
Max MHz: 3500
Nominal: 2000
Enabled: 56 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 75 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version USE113Y 2.10 released Mar-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|------------------|--------|------------|------------|------------|-------------|------------|-------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 112 | 403 | 2790 | 407 | 2760 | 404 | 2780 | | | | | | | |
| 507.cactusBSSN_r | 112 | 191 | 742 | 191 | 743 | 191 | 742 | | | | | | | |
| 508.namd_r | 112 | 314 | 339 | 314 | 338 | 314 | 339 | | | | | | | |
| 510.parest_r | 112 | 874 | 335 | 875 | 335 | 875 | 335 | | | | | | | |
| 511.povray_r | 112 | 486 | 538 | 484 | 540 | 485 | 540 | | | | | | | |
| 519.lbm_r | 112 | 334 | 354 | 333 | 354 | 333 | 354 | | | | | | | |
| 521.wrf_r | 112 | 462 | 544 | 449 | 559 | 456 | 550 | | | | | | | |
| 526.blender_r | 112 | 323 | 528 | 323 | 529 | 322 | 530 | | | | | | | |
| 527.cam4_r | 112 | 335 | 585 | 335 | 586 | 334 | 586 | | | | | | | |
| 538.imagick_r | 112 | 192 | 1450 | 193 | 1450 | 192 | 1450 | | | | | | | |
| 544.nab_r | 112 | 184 | 1020 | 184 | 1020 | 184 | 1020 | | | | | | | |
| 549.fotonik3d_r | 112 | 820 | 532 | 820 | 533 | 820 | 532 | | | | | | | |
| 554.roms_r | 112 | 618 | 288 | 615 | 289 | 619 | 287 | | | | | | | |

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC4

LLC Prefetch set to Disabled

AMP Prefetch set to Enable

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jul 13 18:31:25 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:31:25 up 0 min, 1 user, load average: 0.19, 0.07, 0.02
USER   TTY     FROM          LOGIN@    IDLE    JCPU    PCPU WHAT
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
root      tty1      -          18:31   13.00s  0.91s  0.01s -bash
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 2062582  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 2062582  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c  
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile  
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile  
  $SPEC/tmp/CPU2017.173/templogs/preenv.fprate.173.0.log --lognum 173.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu/2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo  
model name          : Intel(R) Xeon(R) Platinum 8450H  
vendor_id           : GenuineIntel  
cpu family          : 6  
model               : 143  
stepping             : 8  
microcode           : 0x2b000190  
bugs                : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores            : 28  
siblings             : 56  
2 physical ids (chips)  
112 processors (hardware threads)  
physical id 0: core ids 0-27  
physical id 1: core ids 0-27  
physical id 0: apicids 0-55  
physical id 1: apicids 128-183
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8450H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
Stepping: 8
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pnipclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
       avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512fma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
       vpcimulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
       bus_lock_detect cldemote movdiri movdir64b enqcmd fsmr md_clear serialize
       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization: VT-x
L1d cache: 2.6 MiB (56 instances)
L1i cache: 1.8 MiB (56 instances)
L2 cache: 112 MiB (56 instances)
L3 cache: 150 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-6,56-62
NUMA node1 CPU(s): 7-13,63-69
NUMA node2 CPU(s): 14-20,70-76
NUMA node3 CPU(s): 21-27,77-83
NUMA node4 CPU(s): 28-34,84-90
NUMA node5 CPU(s): 35-41,91-97
NUMA node6 CPU(s): 42-48,98-104
NUMA node7 CPU(s): 49-55,105-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL  SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     2.6M   12 Data          1     64       1        64
  L1i     32K     1.8M    8 Instruction   1     64       1        64
  L2      2M     112M   16 Unified        2   2048       1        64
  L3     75M    150M   15 Unified        3  81920       1        64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-6,56-62
node 0 size: 64174 MB
node 0 free: 63663 MB
node 1 cpus: 7-13,63-69
node 1 size: 64473 MB
node 1 free: 64179 MB
node 2 cpus: 14-20,70-76
node 2 size: 64508 MB
node 2 free: 64200 MB
node 3 cpus: 21-27,77-83
node 3 size: 64508 MB
node 3 free: 64251 MB
node 4 cpus: 28-34,84-90
node 4 size: 64508 MB
node 4 free: 64193 MB
node 5 cpus: 35-41,91-97
node 5 size: 64508 MB
node 5 free: 64231 MB
node 6 cpus: 42-48,98-104
node 6 size: 64508 MB
node 6 free: 64284 MB
node 7 cpus: 49-55,105-111
node 7 size: 64479 MB
node 7 free: 64258 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 21 10 12 12 12
 5: 21 21 21 21 12 10 12 12
 6: 21 21 21 21 12 12 10 12
 7: 21 21 21 21 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 528045548 kB
```

10. who -r
run-level 3 Jul 13 18:30

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

| STATE | UNIT FILES |
|-----------------|--|
| enabled | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs |
| disabled | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd |
| indirect | wickedd |

13. Linux kernel boot-time arguments, from /proc/cmdline

| |
|--|
| BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default |
| root=UUID=17904382-c2c1-4de4-88b3-dda5a45ba9e5 |
| splash=silent |
| mitigations=auto |
| quiet |
| security=apparmor |

14. cpupower frequency-info

analyzing CPU 0:

| |
|------------------------------------|
| Unable to determine current policy |
| boost state support: |
| Supported: yes |
| Active: yes |

15. sysctl

| | |
|------------------------------|-------|
| kernel.numa_balancing | 1 |
| kernel.randomize_va_space | 2 |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes | 0 |
| vm.dirty_background_ratio | 10 |
| vm.dirty_bytes | 0 |
| vm.dirty_expire_centisecs | 3000 |
| vm.dirty_ratio | 20 |
| vm.dirty_writeback_centisecs | 500 |
| vm.dirtytime_expire_seconds | 43200 |
| vm.extfrag_threshold | 500 |
| vm.min_unmapped_ratio | 1 |
| vm.nr_hugepages | 0 |
| vm.nr_hugepages_mempolicy | 0 |
| vm.nr_overcommit_hugepages | 0 |
| vm.swappiness | 60 |
| vm.watermark_boost_factor | 15000 |
| vm.watermark_scale_factor | 10 |
| vm.zone_reclaim_mode | 0 |

16. /sys/kernel/mm/transparent_hugepage

| | |
|----------------|--|
| defrag | always defer defer+madvise [madvise] never |
| enabled | [always] madvise never |
| hpage_pmd_size | 2097152 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs 60000  
    defrag 1  
    max_ptes_none 511  
    max_ptes_shared 256  
    max_ptes_swap 64  
    pages_to_scan 4096  
    scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        xfs   894G  82G  812G 10% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:          Lenovo  
Product:         ThinkSystem ST650 V3 MAIN BOARD  
Product Family: ThinkSystem  
Serial:          MDSN00110D
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 14x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800  
 2x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      Lenovo  
BIOS Version:     USE113Y-2.10  
BIOS Date:        03/26/2023  
BIOS Revision:    2.10  
Firmware Revision: 2.10
```

Compiler Version Notes

```
=====  
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_fp_base = 613

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-V.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-V.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-13 06:31:25-0400.

Report generated on 2023-08-02 16:32:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.